
**Industrial automation systems and
integration — Product data representation
and exchange —**

Part 1007:
**Application module: General surface
appearance**

*Systèmes d'automatisation industrielle et intégration — Représentation
et échange de données de produits —*

Partie 1007: Module d'application: Apparence de surface générale



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 10303-1007:2001

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

Page

1	Scope	1
2	Normative references.....	1
3	Terms, definitions, and abbreviations.....	2
3.1	Terms defined in ISO 10303-1	2
3.2	Terms defined in ISO 10303-202	2
3.3	Terms defined in ISO/TS 10303-1001	3
3.4	Abbreviations	3
4	Information requirements	3
4.1	Units of functionality.....	3
4.2	Required AM ARMs	4
4.3	ARM entity definitions.....	5
5	Module interpreted model.....	7
5.1	Mapping specification	7
5.2	MIM EXPRESS short listing.....	12
	Annex A (normative) MIM short names	13
	Annex B (normative) Information object registration	14
	Annex C (informative) ARM EXPRESS-G	15
	Annex D (informative) MIM EXPRESS-G.....	17
	Annex E (informative) Computer interpretable listings	19
	Bibliography	20
	Index	21

Figures

Figure C.1	- ARM EXPRESS-G diagram 1 of 1	16
Figure D.1	- MIM EXPRESS-G diagram 1 of 1.....	18

Tables

Table 1	- Mapping table for General_surface_appearance UoF.....	9
---------	---	---

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In other circumstances, particularly when there is an urgent market requirement for such documents, a technical committee may decide to publish other types of normative document:

- an ISO Publicly Available Specification (ISO/PAS) represents an agreement between technical experts in an ISO working group and is accepted for publication if it is approved by more than 50 % of the members of the parent committee casting a vote;
- an ISO Technical Specification (ISO/TS) represents an agreement between the members of a technical committee and is accepted for publication if it is approved by 2/3 of the members of the committee casting a vote.

An ISO/PAS or ISO/TS is reviewed after three years with a view to deciding whether it should be confirmed for a further three years, revised to become an International Standard, or withdrawn. In the case of a confirmed ISO/PAS or ISO/TS, it is reviewed again after six years at which time it has to be either transposed into an International Standard or withdrawn.

Attention is drawn to the possibility that some of the elements of this part of ISO 10303 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TS 10303-1007 was prepared by Technical Committee ISO/TC 184, *Industrial automation system and integration*, Subcommittee SC 4, *Industrial data*.

ISO 10303 is organized as a series of parts, each published separately. The structure of ISO 10303 is described in ISO 10303-1.

Each part of ISO 10303 is a member of one of the following series: description methods, implementation methods, conformance testing methodology and framework, integrated generic resources, integrated applications resources, application protocols, abstract test suites, application interpreted constructs, and application modules. This part is a member of the application modules series.

A complete list of parts of ISO 10303 is available from the Internet

<<http://www.nist.gov/sc4/editing/step/titles/>>

Annexes A and B form a normative part of this part of ISO 10303. Annexes C, D and E are for information only.

Introduction

ISO 10303 is an International Standard for the computer-interpretable representation and exchange of product data. The objective is to provide a neutral mechanism capable of describing product data throughout the life cycle of a product, independent from any particular system. The nature of this description makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and archiving.

This International Standard is organized as a series of parts, each published separately. The parts of ISO 10303 fall into one of the following series: description methods, integrated resources, application interpreted constructs, application protocols, application modules, abstract test suites, implementation methods, and conformance testing. The series are described in ISO 10303-1. This part of ISO 10303 is a member of the application module series.

This part of ISO 10303 specifies an application module for non-shading surface presentation, including surface colour and wireframe style presentation. This application module does not include specifications for realistic presentation of surfaces or scientific visualization.

A set of application modules can be combined to provide the capability to assign shape elements to layers and visual attributes, such as colours and curve fonts, to geometric and topological elements. For additional information, see Annex F of ISO/TS 10303-1009.

Industrial automation systems and integration — Product data representation and exchange —

Part 1007:

Application module: General surface appearance

1 Scope

This part of ISO 10303 specifies the application module for non-shaded surface presentation, encompassing surface colour and wireframe-style visual attributes. The following are within scope of this part of ISO 10303:

- specification of visual attributes which may be assigned to curves belonging to surfaces;
- selection of specific curve types for wireframe-like presentation of surfaces;
- specification of a mechanism of colour to surfaces.

The following are outside the scope of this part of ISO 10303:

- realistic presentation of surfaces;
- scientific visualization.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 10303. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 10303 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 8824-1:1998, *Information technology — Abstract Syntax Notation One (ASN.1): Specification of basic notation*

ISO 10303-1:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 1: Overview and fundamental principles*

ISO 10303-11:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 11: Description methods: The EXPRESS language reference manual*

ISO/TS 10303-1007:2001(E)

ISO 10303-41:2000, *Industrial automation systems and integration — Product data representation and exchange — Part 41: Integrated generic resource: Fundamentals of product description and support*

ISO 10303-46:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 46: Integrated generic resources: Visual presentation*

ISO 10303-202:1996, *Industrial automation systems and integration — Product data representation and exchange — Part 202: Application protocol: Associative draughting*

ISO/TS 10303-1001:2001, *Industrial automation systems and integration — Product data representation and exchange — Part 1001: Application module: Appearance assignment*

ISO/TS 10303-1002:2001, *Industrial automation systems and integration — Product data representation and exchange — Part 1002: Application module: Colour*

ISO/TS 10303-1003:2001, *Industrial automation systems and integration — Product data representation and exchange — Part 1003: Application module: Curve appearance*

3 Terms, definitions, and abbreviations

3.1 Terms defined in ISO 10303-1

For the purposes of this part of ISO 10303, the following terms defined in ISO 10303-1 apply:

- application;
- application object;
- application protocol;
- application reference model;
- data;
- information;
- integrated resource;
- product;
- product data;
- unit of functionality.

3.2 Terms defined in ISO 10303-202

For the purposes of this part of ISO 10303, the following term defined in ISO 10303-202 applies:

- application interpreted construct.

3.3 Terms defined in ISO/TS 10303-1001

For the purposes of this part of ISO 10303, the following terms defined in ISO/TS 10303-1001 apply:

- application module;
- module interpreted model.

3.4 Abbreviations

For the purposes of this part of ISO 10303, the following abbreviations apply:

AM	application module
ARM	application reference model
MIM	module interpreted model
UoF	unit of functionality
URL	uniform resource locator

4 Information requirements

This clause specifies the information requirements for the general surface appearance module. The information requirements are specified as a set of units of functionality and application objects. The information requirements are defined using the terminology of the subject area of this application module.

NOTE 1 A graphical representation of the information requirements is given in annex C.

NOTE 2 The mapping specification is specified in 5.1 which shows how the information requirements are met using the integrated resources of this International Standard. The use of the integrated resources introduces additional requirements which are common to application modules and protocols.

EXPRESS specification:

*)
SCHEMA General_surface_appearance_arm;
(*

4.1 Units of functionality

This subclause specifies the units of functionality (UoF) for this part of ISO 10303 as well as any support elements needed for the application module definition. This part of ISO 10303 specifies the following unit of functionality:

- General_surface_appearance.

This part of ISO 10303 uses the following units of functionality:

- Colour;
- Curve_appearance.

The units of functionality and a description of the functions that each UoF supports are given below. The application elements included in the UoFs are defined in clause 4.3.

4.1.1 General_surface_appearance

The General_surface_appearance UoF specifies application objects for presentation of surfaces using wireframe-style attributes and surface colour.

The following application objects are specified in the General_surface_appearance UoF:

- Boundary_curve_appearance;
- Control_grid_appearance;
- Parameter_line_appearance;
- Segmentation_curve_appearance;
- Silhouette_curve_appearance;
- Surface_appearance_wireframe;
- Surface_colour;
- Surface_related_curve_appearance.

4.1.2 Colour

This UoF is defined in ISO/TS 10303-1002. The following application entity from this UoF is referenced in this part of ISO 10303:

- Colour.

4.1.3 Curve_appearance

This UoF is defined in ISO/TS 10303-1003. The following application entity from this UoF is referenced in this part of ISO 10303:

- Curve_appearance.

4.2 Required AM ARMs

The following EXPRESS reference statements specify the elements imported from the ARMs of other modules.

EXPRESS specification:

```
*)
USE FROM Colour_arm; -- ISO/TS 10303-1002
USE FROM Curve_appearance_arm; -- ISO/TS 10303-1003
(*)
```

4.3 ARM entity definitions

This subclause specifies the application entities for the general surface appearance module. Each application entity is an atomic element that embodies a unique application concept and contains attributes specifying the data elements of the entity. The application entities and their definitions are given below.

4.3.1 Boundary_curve_appearance

A Boundary_curve_appearance is the curve style that is applied to the boundary curves of a surface.

EXPRESS specification:

```
*)
ENTITY Boundary_curve_appearance
  SUBTYPE OF (Surface_related_curve_appearance);
END_ENTITY;
(*)
```

4.3.2 Control_grid_appearance

A Control_grid_appearance is the curve style that is applied to the mesh of control points which are used for the definition of surfaces.

EXPRESS specification:

```
*)
ENTITY Control_grid_appearance
  SUBTYPE OF (Surface_related_curve_appearance);
END_ENTITY;
(*)
```

4.3.3 Parameter_line_appearance

A Parameter_line_appearance is the curve style that is applied to the iso-parameter lines on a surface.

EXPRESS specification:

```
*)
ENTITY Parameter_line_appearance
  SUBTYPE OF (Surface_related_curve_appearance);
  number_of_u_curves:INTEGER;
  number_of_v_curves:INTEGER;
END_ENTITY;
(*)
```

Attribute definitions:

number_of_u_curves: specifies the number of iso-parameter lines to be presented in the u direction.

number_of_v_curves: specifies the number of iso-parameter lines to be presented in the v direction.

4.3.4 Segmentation_curve_appearance

A Segmentation_curve_appearance is the curve style that is applied to the curves on the segment borders of a surface.

EXPRESS specification:

```
*)
ENTITY Segmentation_curve_appearance
  SUBTYPE OF (Surface_related_curve_appearance);
END_ENTITY;
(*
```

4.3.5 Silhouette_curve_appearance

A Boundary_curve_appearance is the curve style that is applied to the silhouette curves of a surface.

EXPRESS specification:

```
*)
ENTITY Silhouette_curve_appearance
  SUBTYPE OF (Surface_related_curve_appearance);
END_ENTITY;
(*
```

4.3.6 Surface_appearance_wireframe

A Surface_appearance_wireframe specifies visual attributes for the wireframe-like presentation of a surface.

EXPRESS specification:

```
*)
ENTITY Surface_appearance_wireframe;
  side          : STRING;
  styles        : SET [1:5] OF surface_related_curve_appearance;
END_ENTITY;
(*
```

Attribute definitions:

side: specifies the side of a surface to which the styles are applied.

styles: the curve styles used for the wireframe-like surface presentation.

4.3.7 Surface_colour

A Surface_colour specifies the colour for non-shading presentation of a surface.

EXPRESS specification:

```

*)
ENTITY Surface_colour
  side          : STRING;
  assigned_colour : colour;
END_ENTITY;
(*

```

Attribute definitions:

side: specifies the side of a surface to which colour is applied.

assigned_colour: the colour used for non-shading surface presentation.

4.3.8 Surface_related_curve_appearance

A Surface_related_curve_appearance is a generalization of the styles assigned to curves for wireframe-like surface presentation.

EXPRESS specification:

```

*)
ENTITY Surface_related_curve_appearance
  ABSTRACT SUPERTYPE OF (ONE OF (Boundary_curve_appearance,
  Silhouette_curve_appearance, Segmentation_curve_appearance,
  Control_grid_appearance, Parameter_line_appearance));
  style : Curve_appearance;
END_ENTITY;
(*

```

Attribute definitions:

style: specifies the curve appearance associated with each curve type in the context of wireframe-like surface presentation.

EXPRESS specification:

```

*)
END_SCHEMA;
(*

```

5 Module interpreted model

5.1 Mapping specification

This clause contains the mapping table that shows how each UoF and application element of this part of ISO 10303 (see 4.1) maps to one or several MIM resource constructs. The mapping table is organized in five columns. The contents of these five columns are:

Column 1) Application element: Name of an application element as it appears in the application entity definition. Application entity names are written in uppercase. Attribute names are listed after the application entity to which they belong and are written in lower case.

Column 2) MIM element: Name of an MIM element as it appears in the MIM, the term 'IDENTICAL MAPPING', or the term 'PATH'. MIM entities are written in lower case. Attribute names of MIM entities are referred to as <entity name>.<attribute name>. The mapping of an application element may result in several related MIM elements. Each of these MIM elements will require a line of its own in the table. The term 'IDENTICAL MAPPING' indicates that both application entities of an application assertion map to the same MIM element. The term 'PATH' indicates that the application assertion maps to the entire reference path.

Column 3) Source: For those MIM elements that are interpreted from the integrated resources, this is the number of the corresponding part of ISO 10303. For those MIM elements that are created for the purpose of this part of ISO 10303, this is the number of this part.

Column 4) Rules: One or more numbers may be given which refer to rules that apply to the current MIM element or reference path. For rules that are derived from relationships between application entities, the same rule is referred to by the mapping entries of all the involved MIM elements. The expanded names of the rules are listed after the table.

Column 5) Reference path: To describe fully the mapping of an application entity, it may be necessary to specify a reference path through several related MIM elements. The reference path column documents the role of a MIM element relative to the MIM element in the row succeeding it. Two or more such related MIM elements define the interpretation of the integrated resources that satisfies the requirement specified by the application entity. For each MIM element that has been created for use within this part of ISO 10303, a reference path up to its supertype from an integrated resource is specified.

For the expression of reference paths and the relationships between MIM elements, the following notational conventions apply:

[] : multiple MIM elements or sections of the reference path are required to satisfy an information requirement;

() : multiple MIM elements or sections of the reference path are identified as alternatives within the mapping to satisfy an information requirement;

{ } : enclosed section constrains the reference path to satisfy an information requirement;

-> : attribute references the entity or select type given in the following row;

<- : entity or select type is referenced by the attribute in the following row;

[i] : attribute is an aggregation of which a single member is given in the following row;

[n] : attribute is an aggregation of which member n is given in the following row;

=> : entity is a supertype of the entity given in the following row;

<= : entity is a subtype of the entity given in the following row;

= : the string, select or enumeration type is constrained to a choice or value;

\ : the line continuation for strings that wrap.

Table 1 - Mapping table for General_surface_appearance UoF

Application element	MM element	Source	Rules	Reference path
BOUNDARY_- CURVE_- APPEARANCE	surface_style_boundary	46		
CONTROL_GRID_- APPEARANCE	surface_style_control_ grid	46		
PARAMETER_LINE_- APPEARANCE	surface_style_ parameter_line	46		
Number_of_u_curves	u_direction_count	46		surface_style_parameter_line direction_count_select direction_count_select = u_direction_count u_direction_count
Number_of_v_curves	v_direction_count	46		surface_style_parameter_line direction_count_select direction_count_select = v_direction_count v_direction_count
SEGMENTATION_- CURVE_- APPEARANCE	surface_style_ segmentation_curve	46		
SILHOUETTE_- CURVE_- APPEARANCE	surface_style_silhouette	46		
SURFACE_- APPEARANCE_- WIREFRAME	surface_style_usage	46		
side	surface_side	46		surface_style_usage surface_style_usage:side -> surface_side

Table 2 - Mapping table for General_surface_appearance UoF (continued)

Application element	MM element	Source	Rules	Reference path
styles	PATH			surface_style_usage surface_style_usage.style -> surface_side_style_select surface_side_style_select = surface_side_style surface_side_style surface_side_style.styles[i] -> surface_style_element_select
SURFACE_COLOUR	surface_style_usage	46		
side	surface_side	46		
Assigned_colour	PATH			surface_style_usage surface_style_usage.style -> surface_side_style_select surface_side_style_select = surface_side_style surface_side_style surface_side_style.styles[i] -> surface_style_element_select surface_style_element_select=surface_style_fill_area surface_style_fill_area.fill_area -> fill_area_style fill_area_style.fill_styles[i] -> fill_style_select fill_style_select = fill_area_style_colour fill_area_style_colour.fill_colour -> colour
SURFACE_RELATED_- CURVE_- APPEARANCE	surface_style_element_- select	46		

Table 3 - Mapping table for General_surface_appearance UoF (concluded)

Application element	MIM element	Source	Rules	Reference path
style	PATH			surface_style_element_select (surface_style_element_select=surface_style_parameter_line surface_style_parameter_line surface_style_parameter_line.style_of_parameter_lines -> curve_or_render curve_or_render = curve_style curve_style) (surface_style_element_select=surface_style_silhouette surface_style_silhouette surface_style_silhouette.style_of_silhouette -> curve_or_render curve_or_render = curve_style curve_style) (surface_style_element_select=surface_style_control_grid surface_style_control_grid surface_style_control_grid.style_of_control_grid -> curve_or_render curve_or_render = curve_style curve_style) (surface_style_element_select=surface_style_boundary surface_style_boundary surface_style_boundary.style_of_boundary -> curve_or_render curve_or_render = curve_style curve_style) (surface_style_element_select=surface_style_segmentation_curve surface_style_segmentation_curve surface_style_segmentation_curve.style_of_segmentation_curve -> curve_or_render curve_or_render = curve_style curve_style)

5.2 MIM EXPRESS short listing

This clause specifies the EXPRESS schema that uses elements from the integrated resources, application interpreted constructs or application module MIMs and contains the types, entity specializations, rules, and functions that are specific to this part of ISO 10303. This clause also specifies modifications to the textual material for constructs that are imported from the integrated resources. The definitions and EXPRESS provided in the integrated resources or application interpreted constructs for constructs used in the MIM may include select list items and subtypes which are not imported into the MIM. Requirements stated in the integrated resources or application interpreted constructs which refer to such items and subtypes apply exclusively to those items which are imported into the MIM.

EXPRESS Specification:

```

*)
SCHEMA General_surface_appearance_mim;
  USE FROM Colour_mim;           -- ISO/TS 10303-1002
  USE FROM Curve_appearance_mim; -- ISO/TS 10303-1003
  USE FROM presentation_appearance_schema -- ISO 10303-46
  ( fill_area_style_colour,
    surface_side,
    surface_side_style,
    surface_style_boundary,
    surface_style_control_grid,
    surface_style_element_select,
    surface_style_fill_area,
    surface_style_parameter_line,
    surface_style_segmentation_curve,
    surface_style_silhouette,
    surface_style_usage,
    u_direction_count
    v_direction_count;
  (*

```

NOTE The schema referenced above can be found in the following part of ISO 10303:

Colour_mim	ISO/TS 10303-1002
Curve_appearance_mim	ISO/TS 10303-1003
presentation_appearance_schema	ISO 10303-46

EXPRESS Specification:

```

*)
END_SCHEMA;
(*)

```

Annex A
(normative)

MIM short names

Entity names in this part of ISO 10303 have been defined in other parts of ISO 10303. Requirements on the use of the short names are found in the implementation methods included in ISO 10303.

NOTE The EXPRESS entity names are available from Internet:

<<http://www.mel.nist.gov/div826/subject/apde/snr/>>.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 10303-1007:2001

Annex B (normative)

Information object registration

B.1 Document identification

To provide for unambiguous identification of an information object in an open system, the object identifier

{ iso standard 10303 part(1007) version(1) }

is assigned to this part of ISO 10303. The meaning of this value is defined in ISO/IEC 8824-1, and is described in ISO 10303-1.

B.2 Schema identification

B.2.1 general surface appearance arm schema identification

To provide for unambiguous identification of the schema specification given in this application module in an open information system, the object identifiers are assigned as follows:

{ iso standard 10303 part(1007) version(1) object(1) general-surface-appearance-arm-schema(1) }

is assigned to the `general_surface_appearance_arm` schema. The meaning of this value is defined in ISO/IEC 8824-1, and is described in ISO 10303-1.

B.2.2 general surface appearance mim schema identification

To provide for unambiguous identification of the schema specification given in this application module in an open information system, the object identifiers are assigned as follows:

{ iso standard 10303 part(1007) version(1) object(1) general-surface-appearance-mim-schema(2) }

is assigned to the `general_surface_appearance_mim` schema short form schema (see 5.2). The meaning of this value is defined in ISO/IEC 8824-1, and is described in ISO 10303-1.

Annex C
(informative)

ARM EXPRESS-G

The following diagrams correspond to the ARM EXPRESS listing given in clause 4. The diagrams use the EXPRESS-G graphical notation for the EXPRESS language. EXPRESS-G is defined in annex D of ISO 10303-11.

NOTE The inter-page referencing is to the diagram number and not the figure number.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 10303-1007:2001

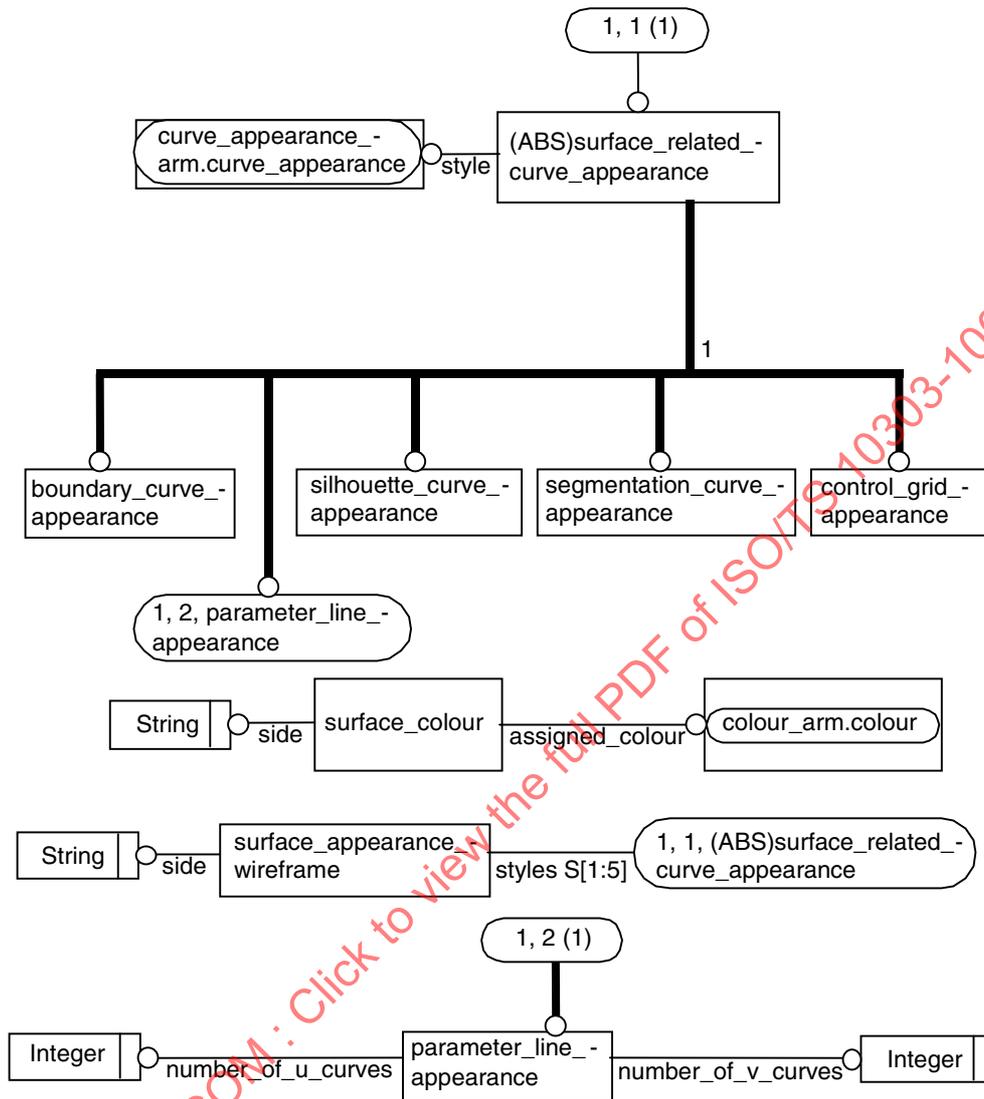


Figure C.1 - ARM EXPRESS-G diagram 1 of 1

Annex D
(informative)

MIM EXPRESS-G

The following diagrams correspond to the MIM EXPRESS expanded listing. The diagrams use the EXPRESS-G graphical notation for the EXPRESS language. EXPRESS-G is defined in annex D of ISO 10303-11.

NOTE The inter-page referencing is to the diagram number and not the figure number.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 10303-1007:2001

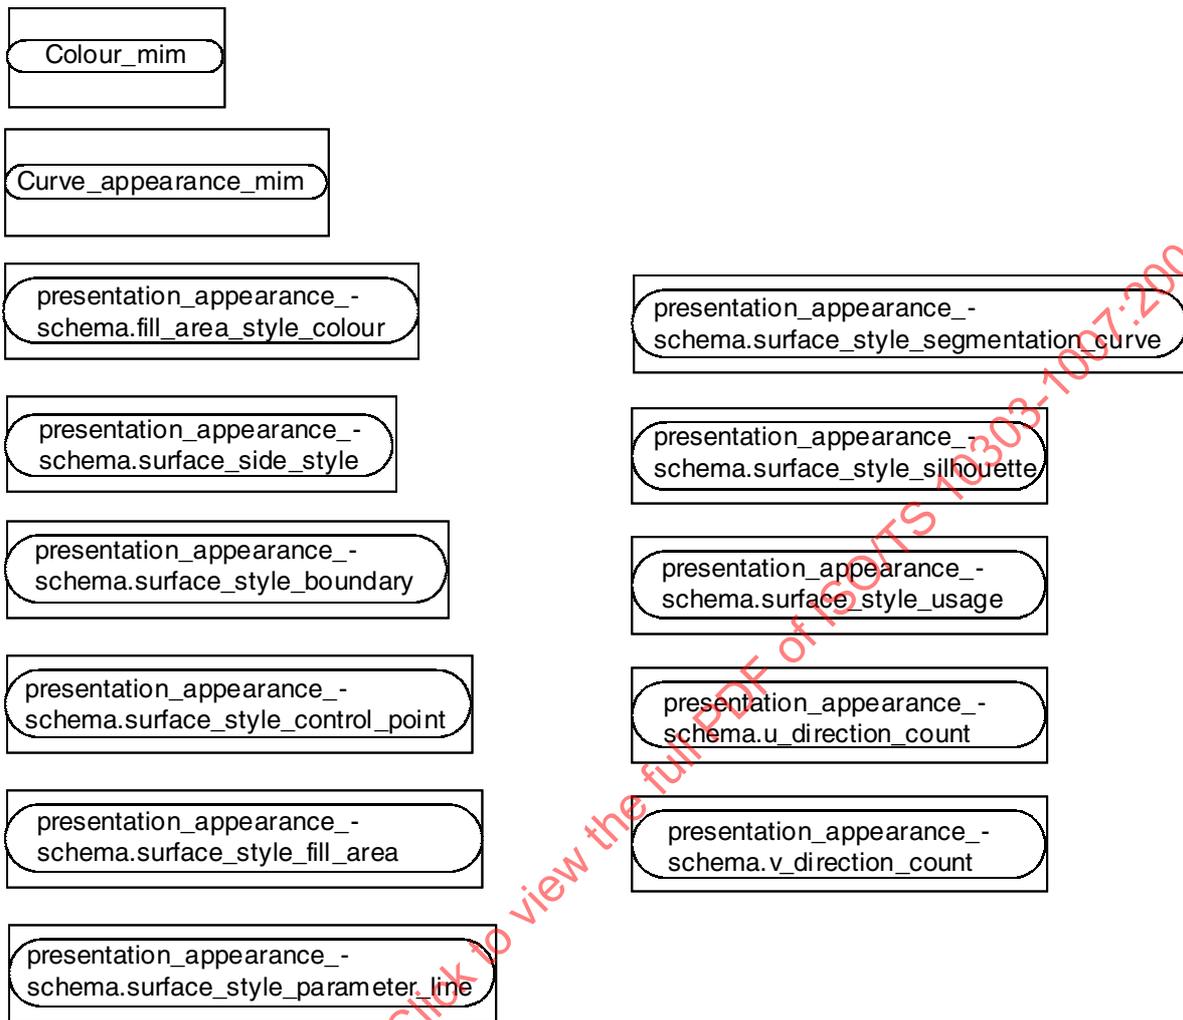


Figure D.1 - MIM EXPRESS-G diagram 1 of 1