
**Fine bubble technology —
Transportation and dispensing
systems for agro- and aqua-cultural
applications —**

**Part 1:
Ultrafine bubble concentration loss
in ultrafine bubble water passing
through long-distance plastic pipes**

STANDARDSISO.COM : Click to view the PDF of ISO/TS 11899-1:2023



STANDARDSISO.COM : Click to view the full PDF of ISO/TS 11899-1:2023



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Testing method and data analysis.....	2
4.1 Basic testing method.....	2
4.2 Equipment and environment.....	3
4.2.1 Reservoir.....	3
4.2.2 Ultrafine bubble water.....	3
4.2.3 Pumping.....	4
4.2.4 Long winding pipe.....	4
4.2.5 Flow meter.....	4
4.2.6 Measuring instrument of number concentration index of ultrafine bubble.....	4
4.2.7 Sampling pipette and glass bottle.....	4
4.2.8 Thermometer.....	4
4.2.9 Stop watch.....	4
4.3 Test procedure.....	4
4.4 Data analysis.....	5
5 Test report.....	6
Annex A (informative) Example of test and data analysis.....	7
Bibliography.....	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 281, *Fine bubble technology*.

A list of all parts in the ISO 11899 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Fine bubbles are applied to agro- and aqua-culture for their uses in supplying water, nutrition and chemicals for facilitation of growth, sterilization and cleaning. Ultrafine bubbles are known to exhibit great stability in water, provided that they are used appropriately within their intended application.

However, since farms are often spatially broad and remotely located, water needs to be transported by pipe lines to meet the huge amounts required. Furthermore, in order to see the benefit of applying ultrafine bubbles, the transportation line should maintain consistent fine bubble water characteristics, including the number concentration index of ultrafine bubbles.^[1] Many mechanisms can be shown for removal of ultrafine bubbles due to mechanical, chemical and thermodynamical effects to imagine the change in the number concentration index loss due to flow in the pipe. When designing the farming system, a reliable prediction on the removal of ultrafine bubbles in the water on the site is needed.

However, there is no useful test method for data or relevant experiments to evaluate how long ultrafine bubbles can practically survive after long transportation.

This document provides the test method on experimental evaluation of a long transfer plastic pipe system in terms of reduction in the ultrafine bubble concentration index due to the flow in pipes. The system, consisting of a reservoir for ultrafine bubble water and a winding pipe, through which the water is circulated periodically from the reservoir, allows description of concentration loss by an empirical equation. Systematic analysis of the data output from the practical test process can benefit users for planning and improving a similar system. An example of deduced formula optimized to reproducing observed data is given in [Annex A](#).

This document cannot be used for any conformity assessment activities on relevant tests.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO/TS 11899-1:2023

Fine bubble technology — Transportation and dispensing systems for agro- and aqua-cultural applications —

Part 1:

Ultrafine bubble concentration loss in ultrafine bubble water passing through long-distance plastic pipes

1 Scope

This document specifies a test procedure, equipment and environment for evaluating the concentration loss of ultrafine bubbles (UFB) due to long-distance transfer of ultrafine bubble water in a plastic pipe. The test results are analysed and expressed in terms of a formula with the flow parameters, pipe length, flow velocity and number of circulations through the pipe. The formula is intended to be used for designing long-distance transport system for industrial applications including agro- and aqua-farming.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

surviving rate

Φ

ratio of number concentration index of ultrafine bubbles at the entrance of a pipe to that at the end of the pipe

Note 1 to entry: The number concentration index of ultrafine bubbles in the water decreases during the flow through the pump and the winding pipe. The rate is evaluated for a sample taken from a reservoir. The vessel is open to room air and the water level is kept over the inlet and the outlet.

3.2

reservoir

vessel for ultrafine bubble water staying almost at rest during the water circulation filled with the water returning back from pipe at its inlet and fed to the gear pump at its outlet, intended to sample ultrafine bubble water for measurement

3.3

sampling

sampling of ultrafine bubble water from the reservoir using a pipette and sampling bottle for the measurement of a size index and a number concentration index

3.4

long winding pipe

long plastic pipe with small inner diameter winding on the bobbin to simulate the behaviour of the long-distance plastic pipe for practical use

3.5

number of circulation

n_p

number of ultrafine bubble water circulation passing through the transport system

Note 1 to entry: The number is defined by the ratio of the product of flow rate in the long winding pipe with elapsed time of an experiment to volume of long winding pipe.

3.6

flow velocity

u_d

fluid velocity of ultrafine bubble water in the long winding pipe

3.7

loss factor

k

coefficient relating the time derivative of the surviving rate to the surviving rate itself

Note 1 to entry: In the analysis of the report, the relationship is assumed to be linear and the loss factor, k , is its proportional coefficient. See [Formula \(1\)](#).

4 Testing method and data analysis

4.1 Basic testing method

The behaviour of extended long-distance plastic pipe is simulated by a pipe winding by many turns measuring long distance in the testing room. The ultrafine bubble water in a reservoir is pushed in by a pump from one end of the pipe and released back to the reservoir after the water completely passes through the long winding pipe.


The decrease in number concentration index of ultrafine bubbles after the passing is measured by particle tracking analysis method.

The process is operated continuously by feeding the water from the outlet of the pipe to the inlet through a reservoir and the pressurizing pump. The pushing pressure is kept constant throughout an experiment.

The measurement sample is taken from the reservoir several times synchronous with the period of the circulation. The systematic decrease of number concentration index and elapsed time are recorded for an experiment with selected parameters on inner diameter, d , length of pipe, L , and flow velocity, v_d .

The experiments are conducted for various different values of the parameters and all accumulated output data are analysed for deducing an empirical formula applicable to the condition within the parameter setting.

In [Figure 1](#), a loop indicates one turn of pipe around the bobbin as a part of long winding pipe.

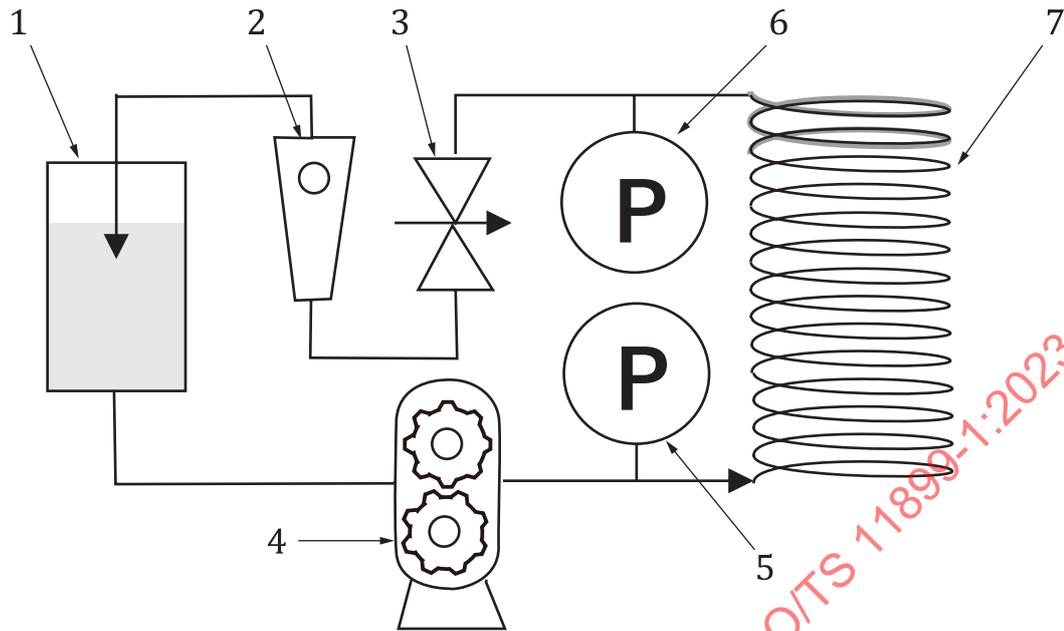**Key**

- 1 reservoir
- 2 rotor flow meter
- 3 needle valve
- 4 gear pump
- 5 pressure gauge 1
- 6 pressure gauge 2
- 7 pipeline

Figure 1 — Schematic diagram of testing system

4.2 Equipment and environment

The environment for the test operation should be conducted at ambient temperature and air pressure and water should be less exposed to the room air in order not to introduce solid contaminants to the water.

The following equipment should be applied for the test system.

4.2.1 Reservoir

The upper surface is allowing to sample the ultrafine bubble water by pipette. The side wall is transparent or has a window allowing observation of sampling and status of water. An inlet and an outlet are put on the side wall. The outlet has a stop valve and is close to the bottom and the inlet, close to the top. The vertical distance of the openings specifies the volume of the ultrafine bubble water in addition to whole long winding pipe.

The structure of the reservoir is simple enough for simple cleaning and sampling and set stable and in ambient temperature.

4.2.2 Ultrafine bubble water

The ultrafine bubble water, namely sample medium, is generated by an ultrafine bubble generating system, and transferred into the reservoir according to ISO 20298-1 and ISO 21255.

Its volume encompasses the volume of the whole pipe loops plus the volume of the reservoir below outlet mouth plus the dead volume of other apparatus. The homogeneity in the reservoir is confirmed prior to the experiments by using the measurement of number concentration index at a few test points and stirring mechanically.

4.2.3 Pumping

A gear pump is used for pushing the ultrafine bubble water into the pipe with controllable flow velocity and pressure drop. The pump has the capacity depending on the long winding pipe so as to allow the choice of flow velocity in the range 5 m/min to 120 m/min at the pressure drop 5 kPa to 250 kPa.

Both parameters are kept stable during an experiment.

The water pressures at both inlet and outlet of the pipe are measured by Bourdon tube pressure gauge.

Their difference gives the pressure drop. The needle valve gives additional pressure drop monitored by the pressure gauge.

4.2.4 Long winding pipe

The flexible plastic pipe, preferably transparent, is wound on the cylindrical column bobbin and fixed to it.

The inner diameter of the pipe allows flexibility for winding and supporting the inner pressure.

4.2.5 Flow meter

The flow rate is measured by the flow meter.

4.2.6 Measuring instrument of number concentration index of ultrafine bubble

The particle tracking analysis method applies. Its operation and principles are defined in ISO 20480-2 and ISO 19430.

4.2.7 Sampling pipette and glass bottle

The pipette and glass bottle with volume capacity more than 10 ml apply. The bottle has elastic rubber packing inner lid and screw lid allowing air tight confinement of ultrafine bubble water at its top.

4.2.8 Thermometer

A thermometer is put in the reservoir and fixed for temperature measurement of ultrafine bubble water.

4.2.9 Stop watch

A stop watch is used to measure elapsed time synchronously to number of circulations.

4.3 Test procedure

The complete testing procedure consists of a few different experiments, with the setup of apparatuses and parameters different from each other.

The following procedure should be applied for each experiment.

- a) Prepare enough ultrafine bubble water to supply both the reservoir and the whole long winding pipe.
- b) Put ultrafine bubble water to the reservoir and open the valve at the outlet to introduce to the gear pump.

- c) Homogenize the ultrafine bubble water in the reservoir by stirring and monitoring the number concentration index and size index distribution of ultrafine bubbles at a few positions in the reserved UFB water.
- d) Sample the ultrafine bubble water from the centre of reservoir for measurement of its number concentration index according to planned sequence of an experiment without operating the system.
- e) Confirm the number concentration index of ultrafine bubbles is within the measurement range of the instrument for the period of each experiment.
- f) Put gear pump on and adjust the flow meter reading to specified value for an experiment.
- g) Take the sample at planned sequence of number of circulations, referring to the indication of stop watch.

Bottle the sampled ultrafine bubble water into the glass bottle using the pipette and seal the bottle carefully.

Label the bottle identifying the number of circulations.

- h) Repeat step g) on all planned numbers of circulations.
- i) Measure the number concentration index and size index of ultrafine bubbles for all planned circulations and record them together with the number and elapsed time at sampling.
- j) Check the operation parameters including thermometer reading are not significantly changed and confirm the records up to the number of circulations.
- k) Stop the gear pump and repeat the steps.

4.4 Data analysis

Since the mechanism of loss in ultrafine bubbles in a pipe has not been well understood, a simple phenomenological hypothesis is applied to lead the empirical relation with its parameters optimized for reproduction of observed data. The hypothesis applies the following linear decreasing rate formula for the simplest formulation in data analysis as shown in [Formula \(1\)](#).

$$\frac{d\Phi(t)}{dt} = -k\Phi(t) \quad (1)$$

[Formula \(1\)](#) leads to the following explicit and exponential relation as shown in [Formula \(2\)](#):

$$\Phi(t) = \Phi_0 \cdot \exp(-k \cdot t) \quad (2)$$

where, Φ_0 is the initial surviving rate, namely unity. Asymptotically surviving rate $\Phi(t)$ approaches zero when $t = \infty$.

The constant, loss factor, k , depends on the system parameter setting of each experiment which causes the decrease of ultrafine bubbles.

For each experiment, the relationship is applied by numerical fitting to the experimental data. The dependence of the parameter k to setting parameters is studied and confirms the dependence to the flow parameters.

Instead of measuring the number concentration index right before the inlet to the reservoir, the number concentration index in the reservoir is measured. The formula describing the time evolution of the latter number concentration index consists of a UFB number loss term due to the water flow out from the reservoir to the pipe and a UFB number gain term due to the water flow into the reservoir from the pipe. The number concentration index of the latter term is the surviving rate $\Phi(t)$.

Accumulating the whole data from all planned experiments in the test, the surviving rates are applied to [Formula \(3\)](#) and optimized with the proportional constant, c , and two exponents, a and b .

$$k = cu_L^a n_p^b \quad (3)$$

The relationship of the observed surviving rate versus its numerical reproduction is drawn in a graph to confirm the reliability level of the formula, where Φ_0 is the initial surviving rate, namely unity. Asymptotically surviving rate $\Phi(t)$ approaches zero when $t = \infty$.

The constant, loss factor, k , depends on the system parameter setting of each experiment which causes the decrease of ultrafine bubbles.

5 Test report

The following information of the test result should be reported.

- a) the date and name of the organization conducting the test;
- b) a reference to this document, i.e. ISO 11899-1:2023;
- c) the condition of the environment: temperature and air pressure;
- d) the essential parameters for flow properties of the sample: inner diameter of the pipe, flow velocity, pressure gap, sample temperature, length of pipe;
- e) the material of the pipe, e.g. polyurethane;
- f) the material of the flow, e.g. ultrafine bubble water, quality of water;
- g) the information on the fine bubble generating system, e.g. the type of generating principle;
- h) the information on the measuring instrument for ultrafine bubbles, e.g. product name and software;
- i) the fitting parameters for the formula: a , b and c ;
- j) the parity plot of the observed loss and reproduced loss, with a brief statement on the reliability of the formula, if any.

Annex A (informative)

Example of test and data analysis

A.1 System settings

A.1.1 Measuring instrument

The particle tracking analysis method^[5] was applied to output the averaged number concentration index and size index over five sequences each with a measurement time of 60 s.

A.1.2 Reservoir

Capacity of a 2 l polycarbonate bottle, which wall is transparent and shape is cylindrical or rectangular solid.

A.1.3 Gear pump

Magnetic drive gear pump: stainless steel, capacity 1,84 -14 ml/min with the features pulsing less, low leakage, max. pressure 0,6 MPa, min. sealed pressure 5,3 kPa.

A.1.4 Pressure gauge 1

Glycerine bath type pressure gauge, stainless steel, capacity 1 MPa.

A.1.5 Pressure gauge 2

Low pressure gauge, capsule type, capacity 50 kPa.

A.1.6 Flowmeter

Plastic float gauge for water, whose performance is shown in [Table A.1](#).

Table A.1 — Flowmeter precisions for each flow rate setting

Q_L l/min	Max. flow rate
0,1	300 ml/min
0,5	800 ml/min
1,0	1 600 ml/min
2,0	2 800 ml/min

A.1.7 Sampling pipette

Volumetric pipette of the capacity of 10 ml.

A.1.8 Pipe

The material is polyurethane.

The inner diameter is 5 mm, outer diameter 8 mm, with whole length of 20 m, 50 m and 100 m.

The inner diameter is 6,5, outer diameter 10 mm, with whole length of 20 m, 50 m and 100 m.

The relationship of the volume of the pipe and volume of the reservoir is as shown in [Table A.2](#) and [A.3](#).

A.1.9 Plastic bobbin

The diameter is 200 mm, 400 mm and the material is acryl plastic.

The volume of the whole loops V_{Loop} , reservoir V_{RES} and total ultrafine water V_{UFB} for three experiments on the inner diameter 5 mm.

Table A.2 — Parameters for the inner diameter of 5 mm

	20 m × 5 mm pipe	50 m × 5 mm pipe	100 m × 5 mm pipe
V_{Loop} [L]	0,39	0,98	1,96
V_{RES} [L]	2	2	2
V_{UFB} [L]	2,4	3,0	4,0

NOTE The values in the label of each experiment indicate the whole pipe length L and inner diameter d_{in}

Table A.3 — Parameters for the inner diameter of 6,5 mm

	20 m × 6,5 mm pipe	50 m × 6,5 mm pipe	100 m × 6,5 mm pipe
V_{Loop} [L]	0,66	1,65	3,32
V_{RES} [L]	2	2	2
V_{UFB} [L]	2,7	3,7	5,3

A.2 Procedure of the operation

Table A.4 — Fluid dynamical parameters for each experiment of the testing

No.	Inner diameter	Pipe loop length	Flow velocity
	mm	m	m/min
1	5	20	0
2	5	20	5
3	5	20	25
4	5	20	50
5	5	20	101
6	5	50	0
7	5	50	5
8	5	50	25
9	5	50	50
10	5	50	101
11	5	100	0
12	5	100	5
13	5	100	25
14	5	100	50
15	5	100	101
16	6,5	20	0
17	6,5	20	3
18	6,5	20	15

Table A.4 (continued)

No.	Inner diameter	Pipe loop length	Flow velocity
	mm	m	m/min
19	6,5	20	30
20	6,5	20	60
21	6,5	50	0
22	6,5	50	3
23	6,5	50	15
24	6,5	50	30
25	6,5	50	60
26	6,5	100	0
27	6,5	100	3
28	6,5	100	15
29	6,5	100	30
30	6,5	100	60

A.3 Data analysis

A.3.1 Initial check

The performance of each experiment was checked briefly by reviewing the graph of data points, with the surviving rate, Φ , for the vertical axis and elapsed time, t , for the abscissa axis. The data sequence shows the behaviour of the systematic decrease within the uncertainty of the surviving rate.


The sequences over all experiments only with a different flow velocity were also plotted similarly in a graph with the abscissa axis of number order passing through the gear pump for confirming the monotonic behaviour as the flow velocity and number of circulations passing through the gear changed.

The temperature of the water did not change more than ± 2 °C. The spontaneous loss of ultrafine bubbles was studied from the measurement results for the samples in step d) in 4.3 and changed less than the uncertainty.

The size indexes of ultrafine bubbles were checked to be around 100 nm not changing significantly more than ± 10 %.

A.3.2 Results of the test

Figure A.1 shows examples from the results of four experiments. The rapid decrease of the UFB number concentration index in relation to the elapsed time, t , and the systematic decrease in the surviving rate Φ depending on the flow velocity, u , are confirmed.

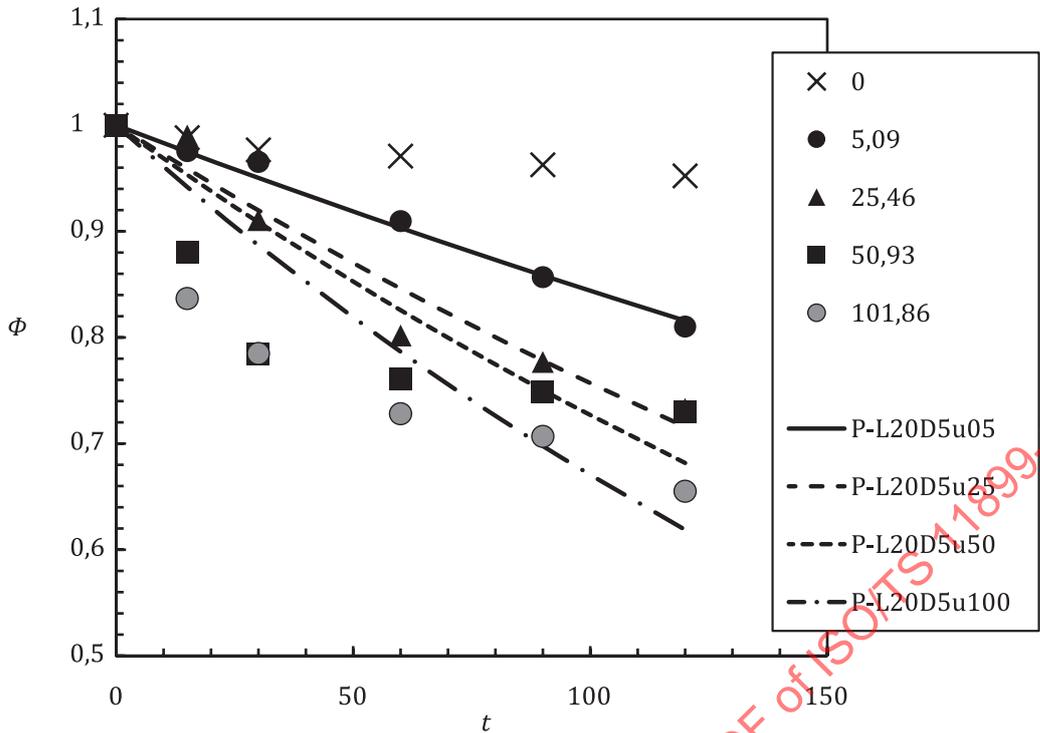

Key

- t elapsed time (t : min)
- Φ surviving rate

Figure A.1 — Typical example of behaviour of the surviving rate

The result comes from four experiments for inner diameter d 5 mm, pipe loop length L 20 m, with different flow velocities. Monotonic decreases are found, and the lines show the simulated results using optimized loss factor, k , as described in [Formula \(3\)](#).

[Figure A.2](#) shows an example for the significant dependence of decrease in the surviving rate Φ to the flow velocity, u_d , and the number of circulations, n_p , and pipe length L .