
**Traffic and Travel Information (TTI) — TTI
via Transport Protocol Expert Group
(TPEG) data-streams —**

**Part 6:
Location referencing applications**

*Informations sur le trafic et le tourisme (TTI) — Messages TTI via les
flux de données du groupe d'experts du protocole de transport
(TPEG) —*

Partie 6: Applications de référence de localisation

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 18234-6:2006



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 18234-6:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Abbreviations	4
5 Location container	5
5.1 Location container concepts	6
5.2 Structure of TPEG-Loc	20
5.3 Coding of location container	23
5.4 TPEG-Loc application primitives	39
6 TPEG-Loc coding for compatibility with ILOC method	70
6.1 TPEG location referencing within ‘location co-ordinates’ – Encoding and decoding	70
6.2 TPEG-location encoder rules	71
6.3 TPEG-location decoder rules	74
Bibliography	76

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In other circumstances, particularly when there is an urgent market requirement for such documents, a technical committee may decide to publish other types of normative document:

- an ISO Publicly Available Specification (ISO/PAS) represents an agreement between technical experts in an ISO working group and is accepted for publication if it is approved by more than 50 % of the members of the parent committee casting a vote;
- an ISO Technical Specification (ISO/TS) represents an agreement between the members of a technical committee and is accepted for publication if it is approved by 2/3 of the members of the committee casting a vote.

An ISO/PAS or ISO/TS is reviewed after three years in order to decide whether it will be confirmed for a further three years, revised to become an International Standard, or withdrawn. If the ISO/PAS or ISO/TS is confirmed, it is reviewed again after a further three years, at which time it must either be transformed into an International Standard or be withdrawn.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TS 18234-6 was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

ISO/TS 18234 consists of the following parts, under the general title *Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams*:

- *Part 1: Introduction, numbering and versions*
- *Part 2: Syntax, Semantics and Framing Structure (SSF)*
- *Part 3: Service and Network Information (SNI) application*
- *Part 4: Road Traffic Message (RTM) application*
- *Part 5: Public Transport Information (PTI) application*
- *Part 6: Location referencing applications*

Introduction

The TPEG technology uses a byte-oriented stream format, which may be carried on almost any digital bearer with an appropriate adaptation layer. TPEG-messages are delivered from service providers to end-users, and are used to transfer information from the database of a service provider to an end-user's equipment.

The TPEG-Loc methodology has been developed to provide a unified location referencing system for all TPEG applications that require such referencing systems. This CEN ISO Technical Specification describes the TPEG-Loc application in detail.

TPEG-Loc is designed to offer service providers and end-users several large and significant advantages over previous location based services. TPEG-Loc forms the basis of location referencing for any TPEG application that may be specified.

It is very important to remember the original TPEG objectives, which ensure that the TPEG-Loc is designed to meet all needs. It is flexible in use, from both a service provision and end-user viewpoint. TPEG-Loc offers choices for service providers to provide simple single-application services through to multi-application services using the *same* location referencing method. TPEG-Loc offers filtering choices for end-users to provide wide or narrowly focussed information, both urban and inter-urban and for single or multi-modal journeys. TPEG-Loc provides for both large networked service providers and small single area service providers and allows a full range of end-user products to be developed, from thick clients such as navigation systems to thin clients such as small hand held travel assistants.

The Broadcast Management Committee of the European Broadcast Union (EBU) established the B/TPEG project group in autumn 1997 with the mandate to develop, as soon as possible, a new protocol for broadcasting traffic and travel-related information in the multimedia environment. The TPEG technology, its applications and service features are designed to enable travel-related messages to be coded, decoded, filtered and understood by humans (visually and/or audibly in the user's language) and by agent systems.

One year later in December 1998, the B/TPEG group produced its first public specifications. Two documents were released. Part 2 (TPEG-SSF, CEN ISO/TS 18234-2) described the Syntax, Semantics and Framing structure, which will be used for all TPEG applications. Part 4 (TPEG-RTM, CEN ISO/TS 18234-4) described the *first* application, for Road Traffic Messages.

CEN /C 278/WG 4, in conjunction with ISO/TC 204/WG 10, established a project group comprising the members of B/TPEG and they have continued the work concurrently since March 1999. Since then two further parts have been developed to make the initial complete set of four parts, enabling the implementation of a consistent service. Part 3 (TPEG-SNI, CEN ISO/TS 18234-3) describes the Service and Network Information Application, which is likely to be used by all service implementations to ensure appropriate referencing from one service source to another. Part 1 (TPEG-INV, CEN ISO/TS 18234-1), completes the work, by describing the other parts and their relationship; it also contains the application IDs used within the other parts.

In April 2000, the B/TPEG group released revised Parts 1 to 4, all four parts having been reviewed and updated in the light of initial implementation results. Thus a consistent suite of specifications, ready for wide scale implementation, was submitted to the CEN/ISO commenting process.

In November 2001, after extensive response to the comments received and from many internally suggested improvements, all four parts were completed for the next stage: the Parallel Formal Vote in CEN and ISO. But a major step forward has been to develop the so-called TPEG-Loc location referencing method, which enables both map-based TPEG-decoders and non map-based ones to deliver either map-based location referencing or human readable information. Part 6 (TPEG-Loc, CEN ISO/TS 18234-6, this document) is now a separate specification and is used in association with the other parts of CEN ISO/TS 18234 to provide comprehensive location referencing. Additionally Part 5, the Public Transport Information Application (TPEG-PTI, CEN ISO/TS 18234-5), has been developed and been through the commenting process.

ISO/TS 18234-6:2006(E)

This Technical Specification, CEN ISO/TS 18234-6, describes the data structure, the encoding and decoding of “TPEG-Loc”. This document has been prepared by CEN/TC 278 *Road Transport and Traffic Telematics* in co-operation with ISO/TC 204, *Intelligent Transport Systems*.

During the development of the TPEG technology a number of versions have been documented and various trials implemented using various versions of the specifications. At the time of the publication of this Technical Specification, all parts are fully inter-workable and no specific dependencies exist. This Technical Specification has the technical version number TPEG-Loc_3.0/001.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 18234-6:2006

Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams —

Part 6: Location referencing applications

1 Scope

This Technical Specification establishes the method of location referencing used by TPEG applications such as TPEG-RTM or TPEG-PTI.

TPEG applications are specified to contain all the information required by a client TPEG decoder (i.e. both location referencing and event information), to present all the information intended for the end-user when it was originated by the service provider.

The term “application” is used in TPEG specifications to describe specific applications, which are at the highest layer of the ISO/OSI protocol stack (ISO/IEC 7498-1). Each TPEG application (e.g. TPEG-RTM) is assigned a unique number that is called the Application IDentification (AID). In this respect TPEG-Loc is not an application, but it is an *essential* constituent part of an application.

Location referencing requires a service provider to give an impression or image to the human end-user of where an event has taken place. This cannot be done easily because the human end-user may or may not be familiar with the location. TPEG-Loc has the added challenge of attempting to be as language independent as possible. This is achieved by the use of TPEG-Loc tables (essentially word oriented data object dictionaries).

TPEG-Loc also provides location data in a machine-readable form that allows a “thick” client such as a navigation system to map-match, on-the-fly, to locate the event being described onto a digital map display.

NOTE Explicit backwards compatibility with the RDS-TMC location referencing method (EN ISO 14819-3) has NOT been attempted, because RDS-TMC locations are finite in number and must be predetermined. TPEG technology does not suffer from this restriction.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TS 18234-1, *Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams — Part 1: Introduction, Numbering and Versions*

ISO/TS 18234-2, *Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams — Part 2: Syntax, Semantics and Framing Structure (SSF)*

ISO/TS 18234-3, *Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams — Part 3: Service and Network Information (SNI) Application*

ISO/TS 18234-4, *Traffic and Travel Information (TTI) – TTI via Transport Protocol Expert Group (TPEG) data-streams — Part 4: Road Traffic Message (RTM) application*

ISO/TS 18234-5, *Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams — Part 5: Public Transport Information Application*

ISO/IEC 7498-1, *Information technology — Open Systems Interconnection — Basic Reference Model: The Basic Model*

3 Terms and definitions

For the purposes of this Technical Specification, the following terms and definitions apply.

NOTE 1 TPEG-Loc is completely focussed on location references for TPEG applications, which are delivering messages to end-users, so for this key operational reason some definitions have a different meaning from that found in other location reference systems.

NOTE 2 Digital map based systems, either on the message generation side or the client end-user side tend to be based upon road mapping rather than, for example, rail track mapping, therefore throughout this specification there is a tendency to use roads as examples. However roads are not necessarily implied, so the use and context of an element must be clarified and this is declared in the coding in 5.3.1.

3.1 additional location descriptions

all information needed to filter, select and process a location in only text-based systems. Information referenced through hierarchically structured text

3.2 connected point

point where several *intersection points* or *non-linked points*, together, make up one connected location. Also the connected points are listed within it

3.3 framed point

a Framed point may be used to describe a point on a network such as a road network or rail network, where the location is not likely to be well known or is a point without a predefined name. The two points either side are used to frame the location with known points

3.4 height

in TPEG-Loc, height is used to describe a point in the vertical plane, relative to the height descriptor as shown in TPEG Table loc04. Height consists of a numerical value, in metres, and descriptor

3.5 intersection point

Point at the intersection of two roads. The given co-ordinate is accompanied by up to three road descriptors to match it exactly on the map

3.6 large area

an area with a large radius of more than one kilometre. The longitude/latitude co-ordinate pair used, does not need to be matched exactly to a road or other object on the map

3.7 location container

in TPEG-Loc, a location container is a concept applied to the location referencing elements, to show how they are grouped together. The TPEG-Loc container comprises a default language code, a location co-ordinates container and an additional location descriptions container

3.8**location co-ordinates**

in TPEG-Loc, the location co-ordinates container includes information needed to identify a location exactly in map-based systems and in many cases also in text-based systems. Information includes WGS 84 co-ordinate pair and descriptive information

3.9**location referencing**

method for referencing locations to facilitate the exchange of location related information between different systems

3.10**location type**

in TPEG-Loc, a location type describes the structure of location referencing data as defined in TPEG Table loc01

3.11**message**

collection of coherent information sent through an information channel. Describes an event or a collection of related events, or status information and includes message management information

3.12**network description**

network description describes links in networks. It is an element of the additional location descriptions container

3.13**nodal area**

area with a small radius, e.g. less than one kilometre. The given co-ordinate should be accompanied by one or more descriptors to match it exactly on a map

3.14**node description**

node description describes single points or complex nodes, which are part of a network. It is an element of the additional location descriptions container

3.15**non-linked point**

Point that cannot be matched exactly with the road network on a map. Road descriptors therefore do not accompany the point co-ordinate

3.16**position**

position defines where an event has taken place in relation to the road: e.g. driving lane 1, hard shoulder, central reservation, etc. The driving lanes are numbered according to the usual local practice, i.e. driving Lane 1 is the lane nearest to the hard shoulder. In countries which drive on the left, driving lanes are hence numbered from left-to-right, and in countries driving on the right, from right-to-left

NOTE Position is an event element and NOT a location reference element.

3.17**radius of expansion**

in TPEG-Loc, a radius of expansion is described by a circle of a certain radius value around a fixed point

3.18**segment**

segment marked by two co-ordinates. The direction of the segment is default from first co-ordinate to second co-ordinate. The direction field can change this. Both co-ordinates are accompanied by up to three road descriptors to match them exactly on the map

3.19

TPEG-Loc definitions

see section 5 for further explanations

3.20

WGS 84 usage

in TPEG-Loc, latitude and longitude are the only two elements used from the WGS 84 specification (see bibliography)

4 Abbreviations

For the purposes of this Technical Specification, the following abbreviations apply.

4.1

BPN

Broadcast, Production and Networks (an EBU document publishing number system)

4.2

B/TPEG

Broadcast/TPEG (the EBU project group name for the specification drafting group)

4.3

CEN

Comité Européen de Normalisation

4.4

EBU

European Broadcasting Union

4.5

IC

Inter City (normally railway and bus routes)

4.6

ILOC

Intersection location

4.7

IPR

Intellectual Property Right(s)

4.8

ISO

International Organization for Standardization

4.9

OSI

Open Systems Interconnection

4.10

PTI

Public Transport Information (see CEN ISO/TS 18234-5)

4.11

RFU

Reserved for Future Use (not necessarily abbreviated)

4.12**RTM**

Road Transport Message (see CEN ISO/TS 18234-4)

4.13**TPEG**

Transport Protocol Experts Group

4.14**TPEG-ilc**

Descriptor formed according to TPEG-Loc rules

4.15**TTI**

Traffic and Travel Information

4.16**WGS 84**

World Geodetic System 1984

5 Location container

Most TPEG applications are designed to deliver TPEG-messages, which consist of three high level containers, each with one or more elements. These containers are for message management, event information and location referencing information. Note some special application messages do NOT include a TPEG-Loc container, such as a cancellation message. It should also be noted that each container does not necessarily have all possible lower level elements included.

Figure 1 shows the structure likely to be used, for example, when a TPEG-RTM (CEN ISO/TS 18234-4) application message is generated to describe a road event and location references need to be given to the end-user.

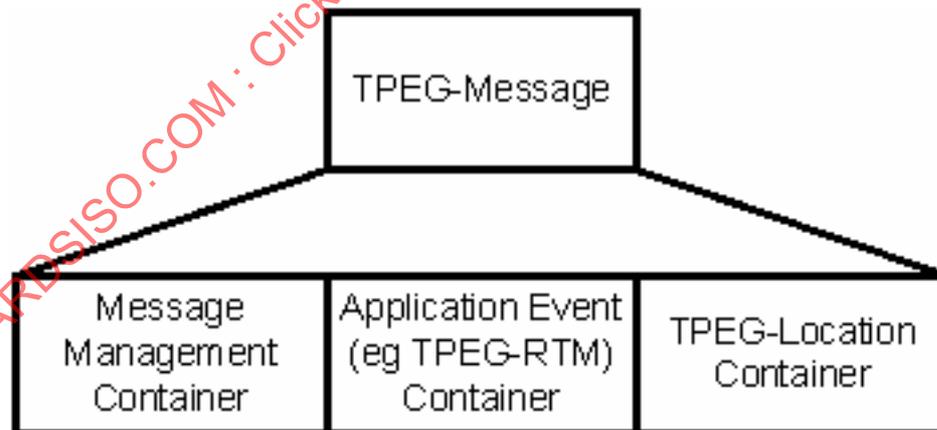


Figure 1 — The TPEG-message container and the three lower level containers

The main purpose of TPEG-Loc is to provide both human understandable and machine-readable elements to any client TPEG decoder. It may be a 'thin' client only able to convey limited location referencing information to the end-user or it may be a 'thick' client using a considerable number of elements and using considerable processing power to filter the information for complex display to an end-user.

The TPEG-Loc concept combines two aspects of location references: both machine-readable and human understandable, are delivered together. Within TPEG-Loc, there is a super-set of the so-called intersection

location, ILOC method¹⁾, which may be used in a terminal client to map match on the fly to an installed digital map regardless of exact compatibility with the digital map being used by a service provider. Additionally, the TPEG-Loc super set of ILOC allows a human readable description to be easily decoded and displayed for an end-user. The rules for this method, within TPEG-Loc, are given in Section 6.

The TPEG-location container shown in Figure 2 provides for extensive location descriptions, which shall be matched by the service provider to local signposts to allow the human user to orient the received information with local visual information.

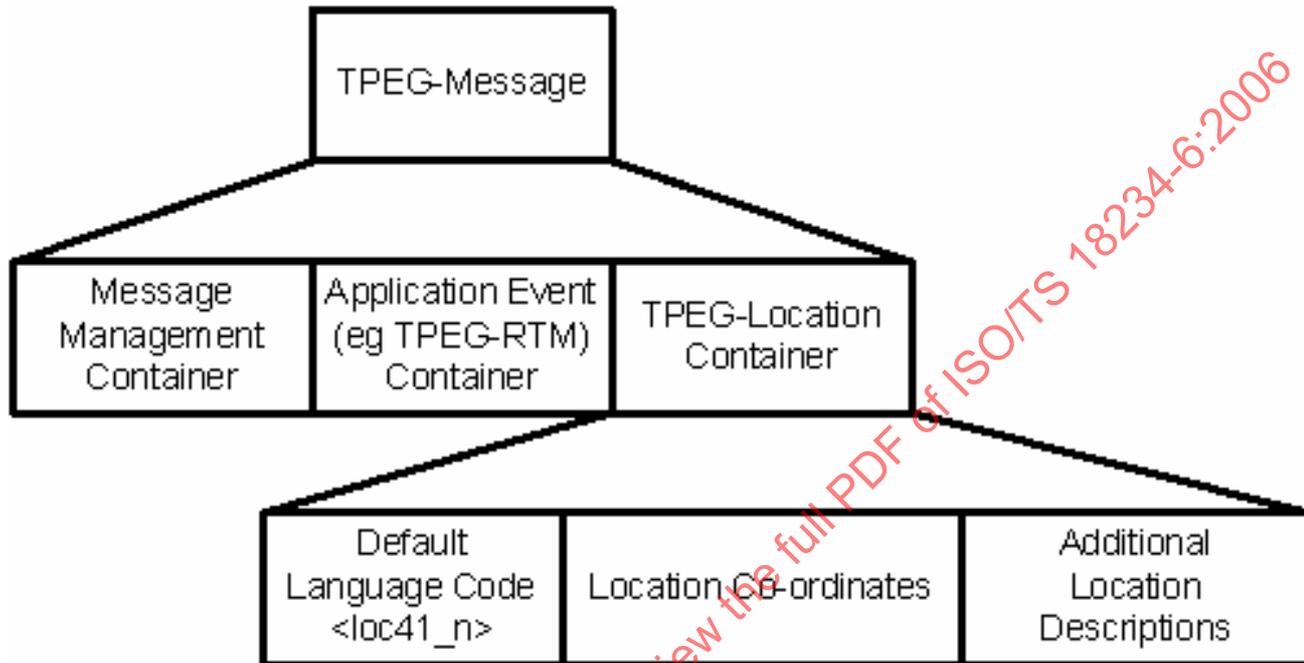


Figure 2 — The TPEG-location container concept

TPEG applications are designed to be language independent, thus a default language code is included within the TPEG-Loc container to determine an overall language for the descriptive elements of the TPEG-Loc information. Further element-related language codes may be used to describe, for example, location names having more than one language description (e.g. Brussels and Bruxelles or Casnewydd and Newport).

It is important to note that the location co-ordinates container mixes location co-ordinates and human readable description elements together to achieve the mix of both machine and human readable aspects. Whereas the additional location descriptions container is designed to facilitate human readable aspects alone, by providing extended descriptions that are essentially designed for human readability.

5.1 Location container concepts

The TPEG-Loc concept is easily described by the use of diagrams in this section, before more technical descriptions are given in later sections.

These diagrams are intended to provide a first appreciation of the structure, before going onto the coding architecture and finally coding detail.

The text in the boxes represents the name of the coding element and corresponds to the coding architecture definition explained in 5.2 and coding detail, which is described in 5.3.

¹⁾ For further reading: EVIDENCE: Detailed ILOC Location Referencing Rules Specifications Version Nr 1.0, dated 28.06.1999, (also logged as EBU B/TPEG PG 99/102)

Text in the boxes that is written in brackets defines the data type for this coding element:

- (code) the element is coded (language independently) through the use of a TPEG-Loc table
- (text) or (string) the element is a string
- (number) or (radius) the element is a (language independent) number with a numeric value

In case of descriptors, the text in brackets gives a hint about the string or descriptor type, e.g. (area name), (TPEG-ilc1), (node name).

All “Descriptors” in TPEG-Loc are composed of a descriptor_type (table loc03), a text string and a language code. *The language code is only used if the string is not written in the default language.* All “descriptors” in TPEG-Loc may be repeated to deliver names of the same place in multiple languages.

EXAMPLE Brussels and Bruxelles, Casnewydd and Newport.

NOTE The dotted notation for an element box is used to indicate that an element is optional. The shadow notation is used to indicate that an element may be repeated.

A shadowed element box may be repeated according to the service provider requirements to describe locations in more detail or according to the definitions given by the different concept diagrams.

5.1.1 Location co-ordinates

The location co-ordinates container includes all elements required to describe a location, for both human understandable and machine-readable needs. The elements can be grouped together in a number of ways according to the type of point, segment or area to be described. The most commonly encountered combinations are shown in the following sections.

The location co-ordinates method is used to describe any kind of geo-referenced location information in TPEG. It has a universal structure visualized in Figure 3 and defined in 5.2.2 and 5.3.1.2.

This universal method must be applied dependent upon the various TPEG location types (see Table 1 below) and according to the definitions given in 5.1.1.1 to 5.1.1.7. The concept diagrams are an indispensable part of the location co-ordinates definition, because they specify the permitted *usage*, *order* and *number* of descriptors for a specific TPEG-Loc table loc01 value. *It is important to note that in TPEG-Loc the elements WGS 84 and Descriptors are fixed related-elements and may not be mixed, regardless of order.* (This element usage differs from the general declarative concept, where the order of transmission is theoretically unimportant.)

Each descriptor usually occurs just once according to the TPEG-Loc table loc01_n diagrams, but can be repeated if the service provider wants to transmit the same name in more than one language. Each descriptor must be labelled with “descriptor type” and the codes specified through the TPEG-Loc table loc01_n diagrams and “table loc03”. (The repetition of a specific descriptor type only makes sense if the service provider wants to transmit the same name in different languages, otherwise a repetition would imply a contradiction.)

NOTE To understand the location co-ordinates definition, the reader must take into account Figure 3, Table 1, 5.2.2, 5.3.1.2, 5.1.1.1 to 5.1.1.7 and Table loc03. There is a close relationship between the coding, the TPEG-Loc table loc01 value, the TPEG-Loc table loc01_n diagrams and Table loc03.

Table 1 shows an extract from the TPEG-Loc table loc01, which acts as an “internal index” to the following concept diagrams covering the needs of location co-ordinates elements.

Table 1 — Index to concept diagrams following this section

Table code	Description
loc01_01	large area
loc01_02	nodal area
loc01_03	segment
loc01_04	RFU
loc01_05	intersection point
loc01_06	framed point
loc01_07	non-linked point
loc01_08	connected point

The overall TPEG-Location Container concept was shown in Figure 1, in 5.1, above. The location co-ordinates container part is expanded out as shown in Figure 3. This figure indicates the complete concept and shows the lower layers of the concept diagram describing elements in terms of the rules established in this section.

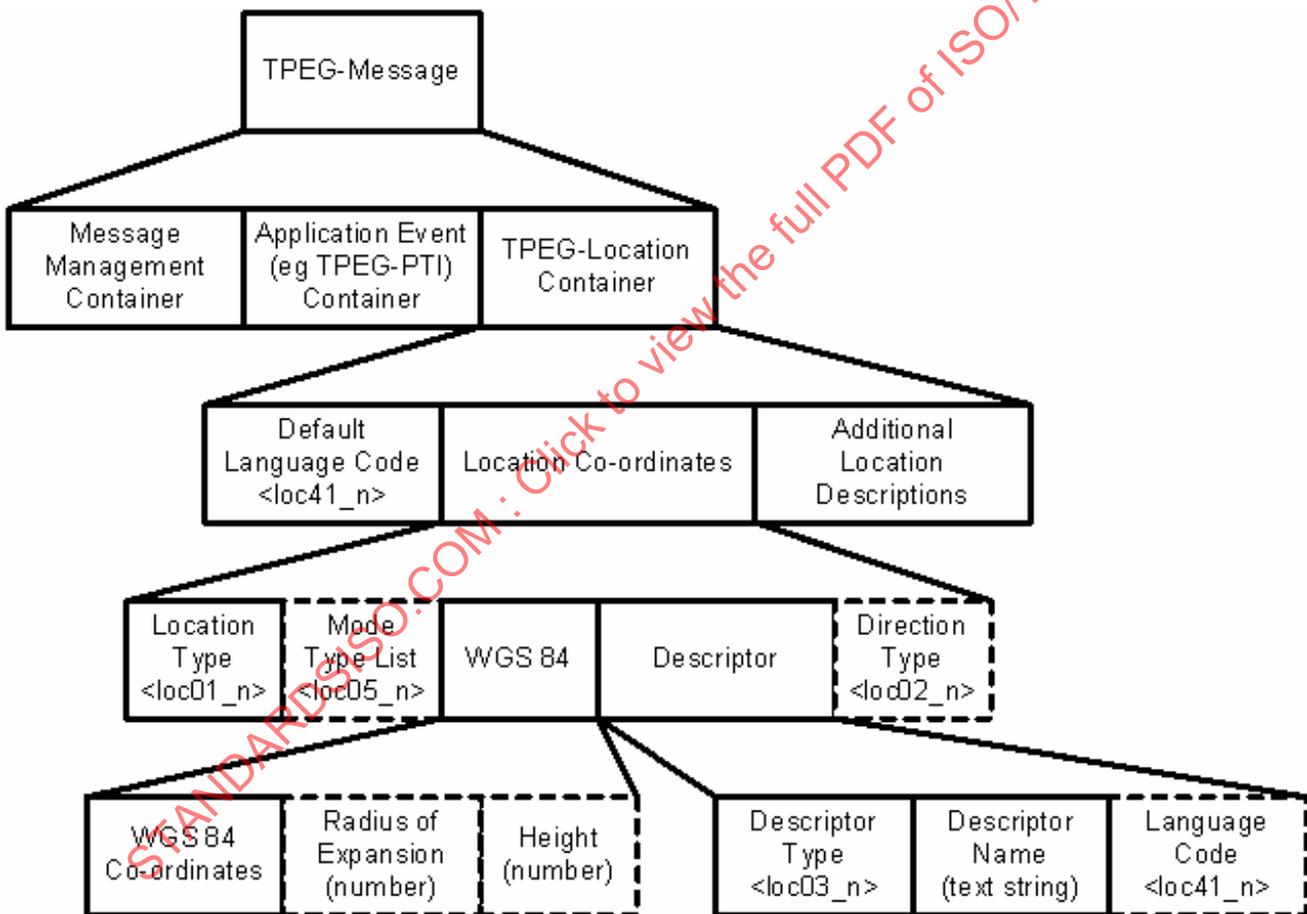


Figure 3 — Location container overall concept

5.1.1.1 Large area

Where type is defined by TPEG Table loc01_1

A large area may be used to describe a location such as a conceptually large area (e.g. the Black Forest) where messages covering the large area need to be conveyed, such as network restrictions due to wide ranging weather conditions. A large area can be defined to describe 'area locations' from a village or town up to counties, countries and large fuzzy regions.

EXAMPLE The following hierarchy of information may be needed to describe a location such as the Black Forest (based on Bad Rippoldsau-Schapbach):

```

location_co-ordinates
  location_type: large area (loc01_1)
  point
    WGS 84
      longitude: E 8.32826
      latitude: N 48.42844
      radius of expansion: 50 km
    descriptor
      type: area name (loc03_1)
      text: Black Forest
      language
        language_code: English (loc41_30)
    descriptor
      type: area name (loc03_1)
      text: Schwarzwald
      language
        language_code: German (loc41_40)
  
```

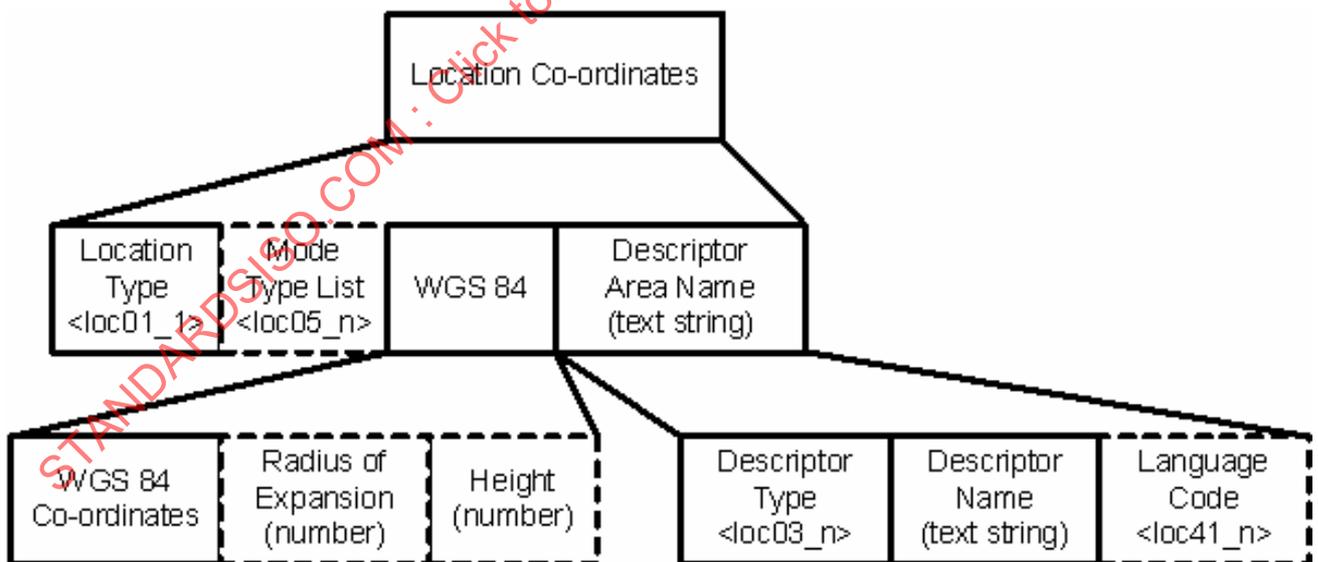


Figure 4 — Location co-ordinates container – Large area elements

5.1.1.2 Nodal area

Where type is defined by TPEG Table loc01_2

A nodal area may be used to describe a location with access to one or multiple transport mode. For example, Frankfurt Airport, which has a number of locations to be described such as airport bus stop, taxi rank and railway station, that are all within the airport area.

EXAMPLE The following hierarchy of information may be needed to describe a location such as Frankfurt Airport Terminal 1:

```

location_co-ordinates
  location_type: nodal area (loc01_2)
  mode_type_list
    mode_of_transport: aircraft (loc05_9)
    mode_of_transport: railway (loc05_2)
  point
    WGS 84
      longitude: E 8.56964
      latitude: N 50.05062
      radius of expansion: 3 km
    descriptor
      type: tpeg-ilc1 (loc03_7)
      text: A03
    descriptor
      type: tpeg-ilc2 (loc03_8)
      text: B43
    descriptor
      type: tpeg-ilc3 (loc03_9)
      text: Hugo-Eckener-Ring
    descriptor
      type: node name (loc03_2)
      text: Frankfurt Airport
    
```

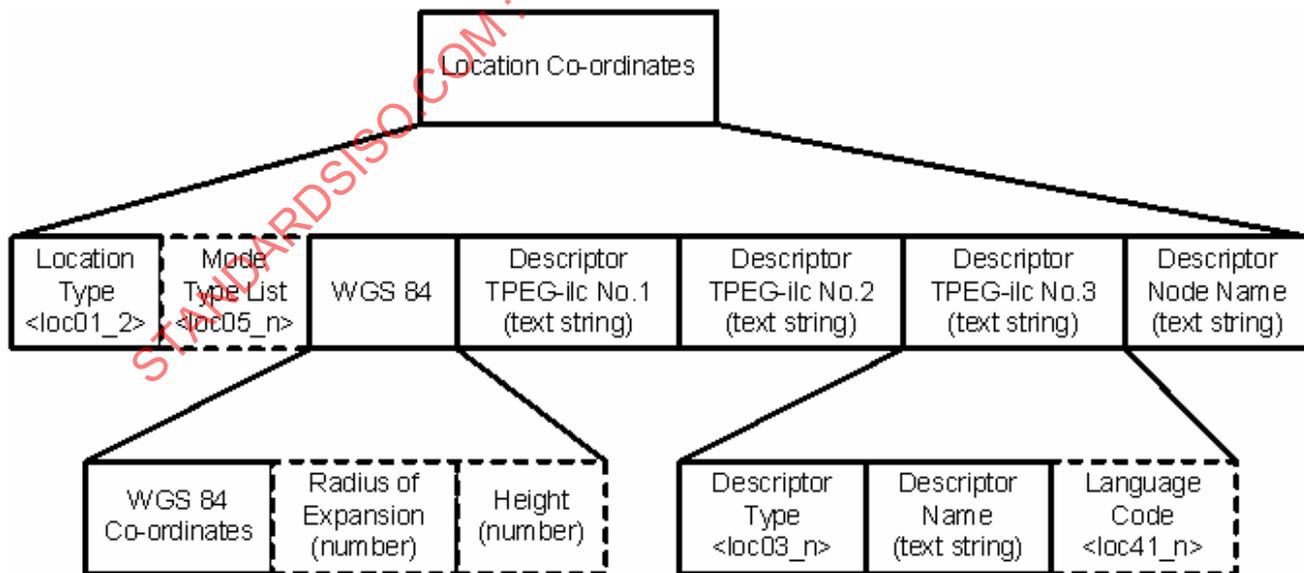


Figure 5 — Location co-ordinates container – Nodal area elements

5.1.1.3 Segment

Where type is defined by TPEG Table loc01_3

A segment may be used to describe a connection within a network such as a road network or rail network, from one city to another, framed by the two intersection points for which the coordinate pairs are transmitted.

The first set of descriptors indicate the “from point” and the second set of descriptors indicate the “to point”. The direction is implied by this structure as “from” to “to”. The element direction is additionally described by TPEG Table loc02.

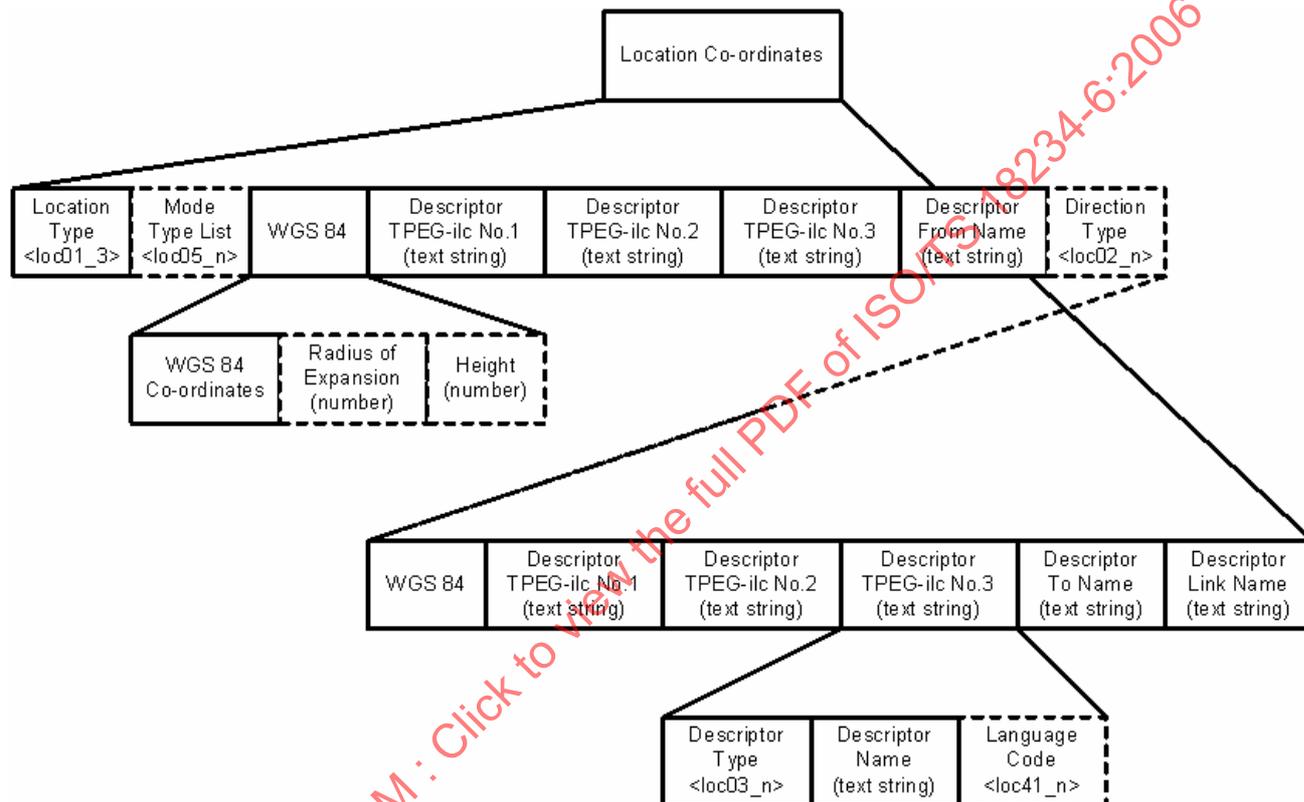


Figure 6 — Location co-ordinates container – Directional segment elements

5.1.1.4 Intersection point

Where type is defined by TPEG Table loc01_5

An intersection point may be used to describe a point on a network such as a road crossing (e.g. Oxford Circus where Regent Street and Oxford street cross). The intersection point is a defined intersection of several roads given by a centre co-ordinate (using the WGS 84 co-ordinates) and up to 3 road descriptors, TPEG-ilc 1 to 3.

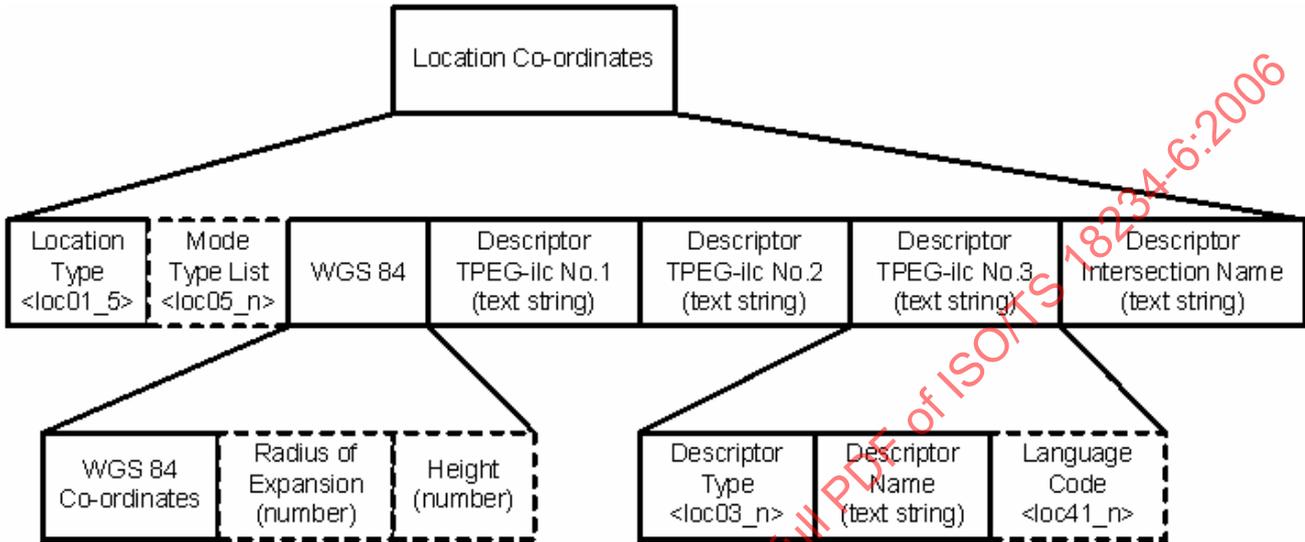


Figure 7 — Location co-ordinates container — Intersection point elements

5.1.1.5 Framed point

Where type is defined by TPEG Table loc01_6

A Framed Point may be used to describe a point on a network such as a road network or rail network, where the location is not likely to be widely known. The two points either side are used to frame the location with known points, for example a rural junction with an established local name, i.e. Bowship roundabout, which is 3 km from one town (Hailsham) and 6 km from another town (Horam).

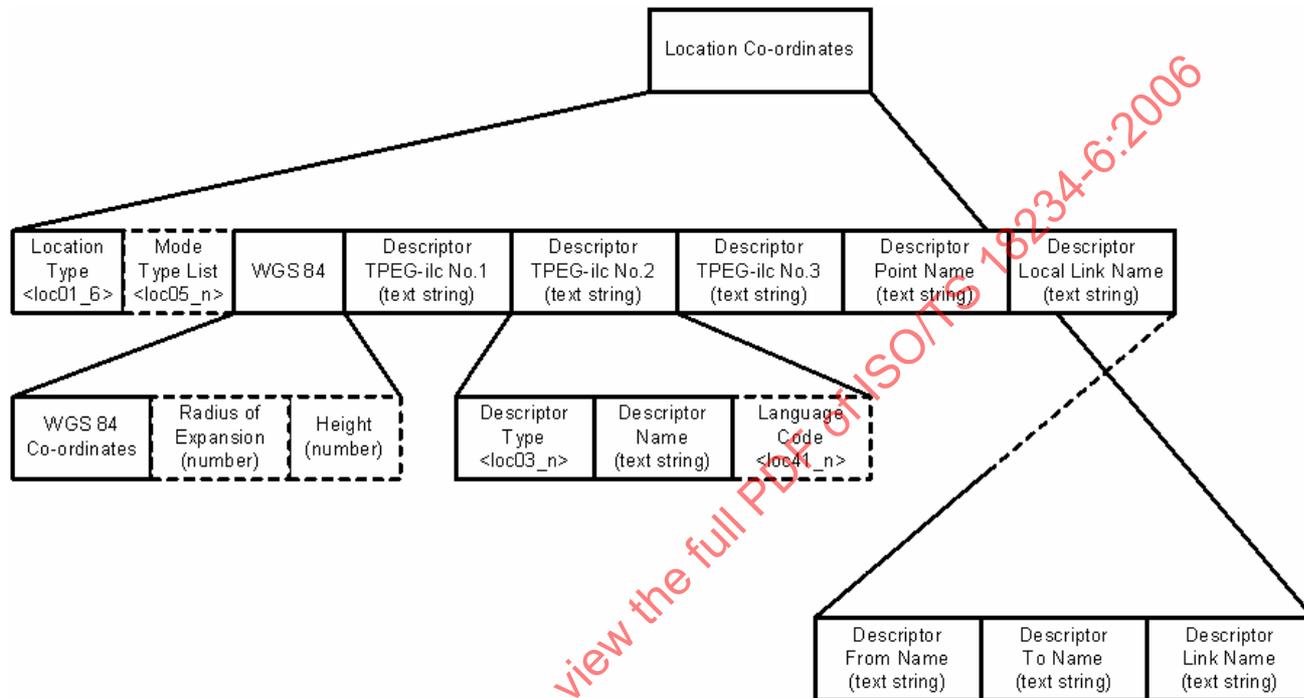


Figure 8 — Location co-ordinates container – Framed point elements

5.1.1.6 Non-linked point

Where type is defined by TPEG Table loc01_7

A non-linked point may be used to describe a point (defined through the co-ordinate) which is not located on any transport network or part of one. It may be used to identify an off-network point (e.g. in a field where an event is taking place).

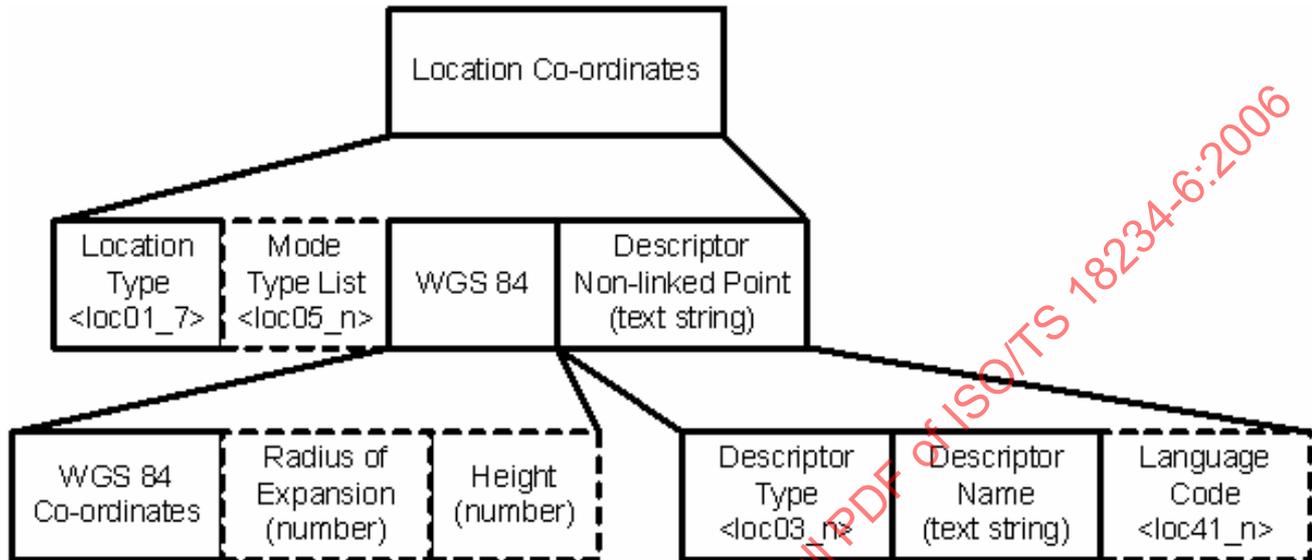


Figure 9 — Location co-ordinates container. Non-linked point elements

5.1.1.7 Connected points

Where type is defined by TPEG Table loc01_8

Connected points may be used to describe a collection of transport modes. In TPEG-Loc 'connected points' is used to describe multimodal locations that represent a node with more than one sub-node with access to multiple transport modes. A service provider may want to describe the airport, the long-distance railway station, the regional railway station, the underground, the bus stops, the Park-and-Ride facilities and so on. TPEG-Loc even allows the service provider to give location information on different terminals within the airport.

EXAMPLE The following hierarchy of information may be needed to describe connected points at a location such as London Heathrow Airport:

```

location_co-ordinates
  location_type: connected points (loc01_8)
  mode_type_list
    mode_of_transport: aircraft (loc05_9)
    mode_of_transport: suburban railway (loc05_4)
    mode_of_transport: metro (loc05_5)
    mode_of_transport: bus (loc05_6)
  point
    WGS 84
      longitude: W 0.45294
      latitude: N 51.478253
      radius of expansion: 3 km
    descriptor
      type: multimode point (loc03_13)
      text: London Heathrow
    descriptor
      type: airport name (loc03_17)
      text: Heathrow
    WGS 84
      longitude: W 0.45232
      latitude: N 51.47099
      radius of expansion: 300 m
    descriptor
      type: railway station name (loc03_18)
      text: Heathrow Express, Terminal 1
    WGS 84
      longitude: W 0.45232
      latitude: N 51.47099
      radius of expansion: 200 m
    descriptor
      type: Metro station name (loc03_19)
      text: Picadilly Line, Heathrow Terminals 1, 2, 3
    WGS 84
      longitude: W 0.44725
      latitude: N 51.45923
      radius of expansion: 200 m
    descriptor
      type: Metro station name (loc03_19)
      text: Picadilly Line, Heathrow Terminal 4
    WGS 84
      longitude: W 0.45162
      latitude: N 51.47228
      radius of expansion: 200 m
    descriptor
      type: bus stop name (loc03_33)
      text: Airport Bus Terminal 1
  
```

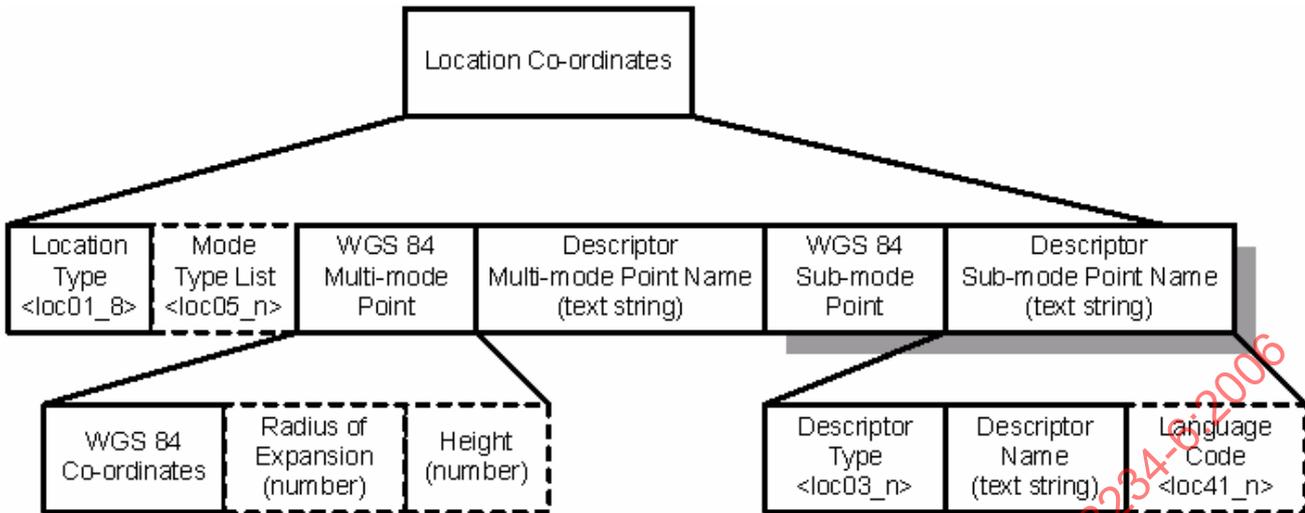


Figure 10 — Location co-ordinates container – Connected points elements

5.1.2 Additional location descriptions

In addition to the location co-ordinates described above, TPEG-Loc also offers the use of additional descriptive location referencing. The main use of this is to provide a human user with information on the location without any need for co-ordinate references to a map, as may be experienced when using a ‘thin-client’ TPEG decoder (non-map-based).

The method allows a relatively large amount of language independence, by employing various TPEG tables (numbered locxx) that may be translated into suitable descriptive word combinations for human end-users. It allows referenced text-based location information to be delivered in a fully, understandable, structured format without the *essential* use of WGS 84 co-ordinates.

Location referencing is achieved through the hierarchically structured use and context of data elements and codes. This provides both full network and node descriptions and an area referencing method to allow client geo-area filtering.

The TPEG-location container concept is shown in Figure 11 with the additional location descriptions container shown in more detail.

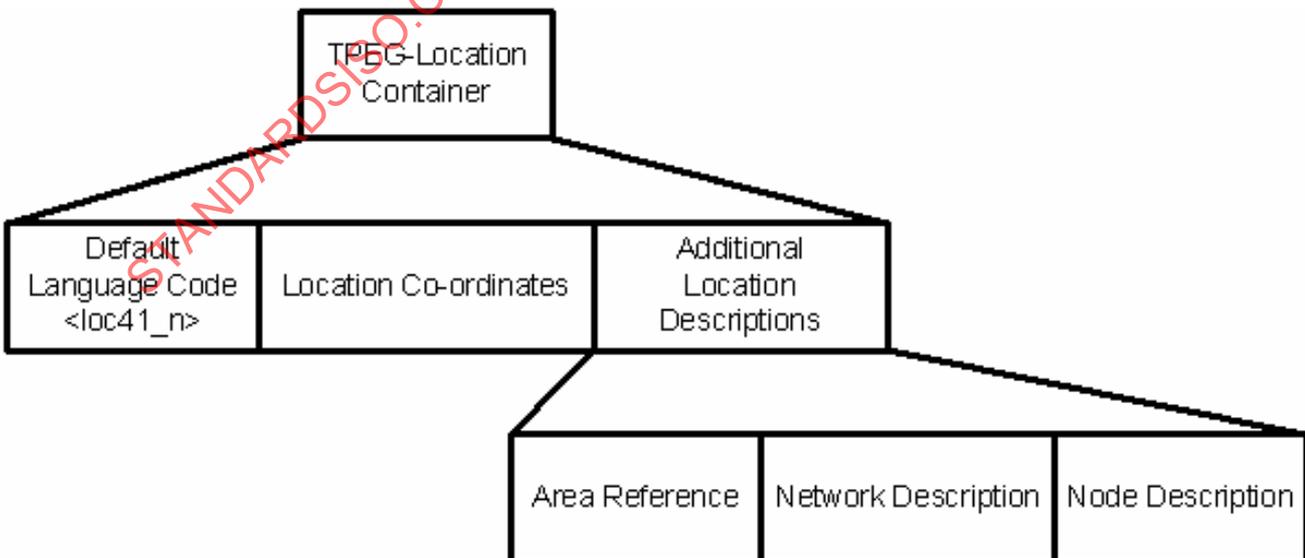


Figure 11 — Additional location description components

5.1.2.1 Area referencing

The concept of providing area references allows a client decoder to filter messages on a geographical-area basis. It has the major advantage that a receiver/decoder without a map database can filter messages.

An area reference describes an area in relation to all other possible areas within a service component, and is an element of the additional location descriptions container.

Area referencing is achieved by defining an area tree structure, in which each area name is given a unique “triplet number”. This definition is individually determined by each service provider. Therefore a service provider can optimize an area tree structure for their services, without reference to other area definitions that are not optimized for end-user requirements (e.g. administrative areas such as cantons).

EXAMPLE Figure 12 shows an example of an area tree structure, where branches are identified by levels numbered from 0 upwards. The root of the tree structure is “0” and in this example the geographical-area of the country Germany. Level 1 then provides a reference to large geographical-areas such as the Black Forest. Level 2 provides references to smaller geo-areas than level 1 such as “The North of the Black Forest” and large cities like Stuttgart. Level 3 provides references to even smaller areas and levels 4 to 8, are available for progressively smaller geo-areas. The root of an area tree is decided by the service provider. This means that a local service provider, for example in Munich may use Greater Munich as the root and the service provider does not have to generate a complete tree starting with Germany, Bavaria, etc. A typical area tree may be quite small with perhaps up to 20 entries in 3 levels to make it simple for the end-user to select the preferred area, within the service being used.

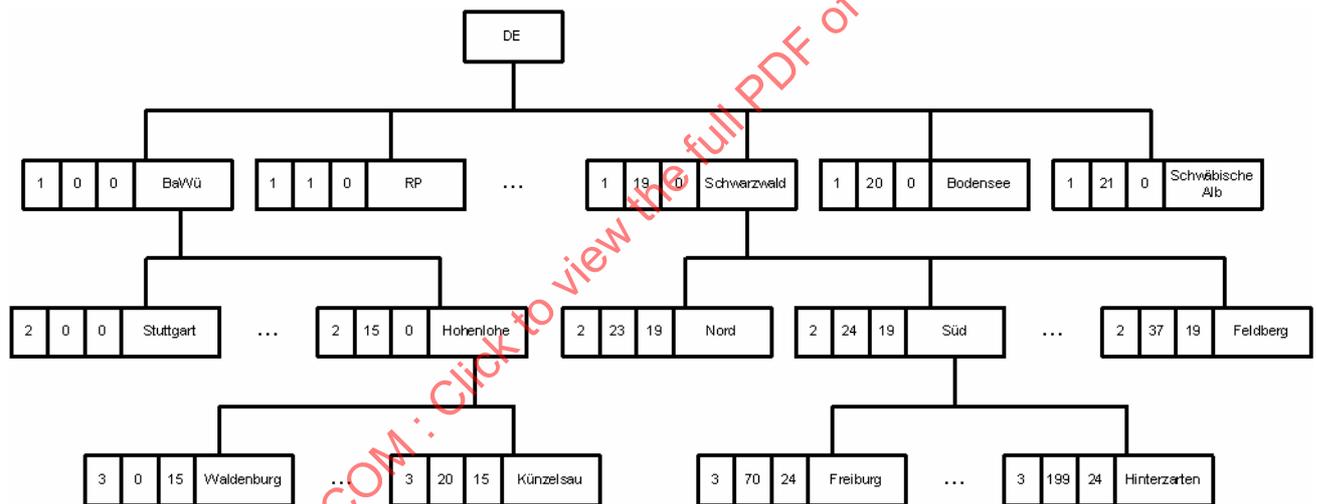


Figure 12 — An example of an area tree

Each area tree refers to specific service component within a service. This means that the service provider can adapt an optimal area tree for each component. A service, for example, which delivers one component containing national traffic information for the main roads and another component for local traffic information may have different area trees for each component for the benefit of the end-user.

The indexing of geo-areas by “triplet number” makes it possible for a receiver to store the area tree structure together with area names. A receiver may then filter messages referring to a specific area by its unique “triplet number”. This provides the opportunity for the end-user to select messages only referring to a particular area.

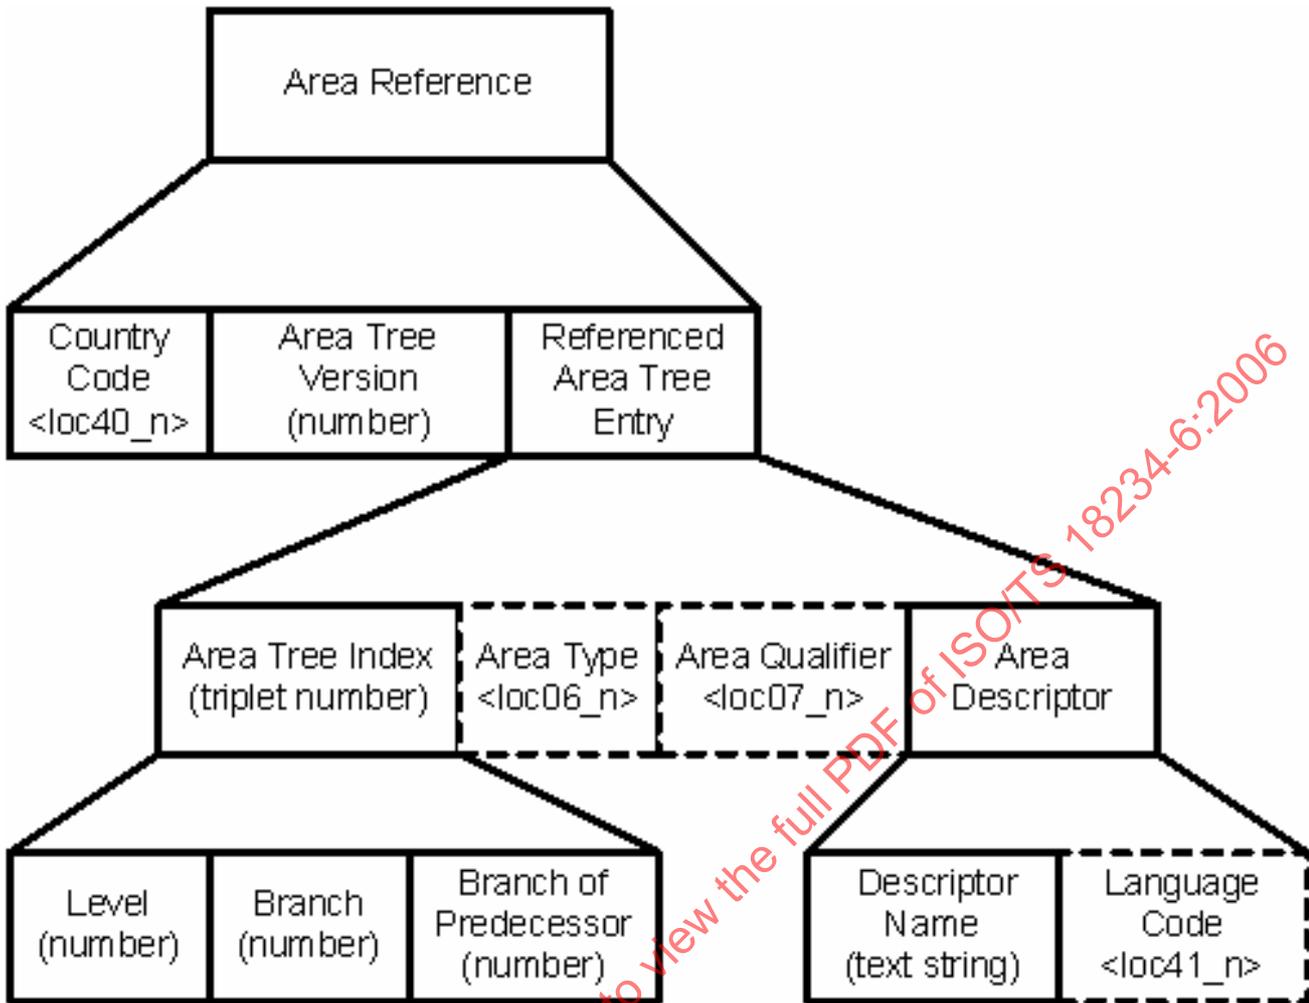


Figure 13 — Area referencing

5.1.2.2 Network description

The network description provides information about links in networks, and is an element of the additional location descriptions container. The defined structure of the element permits filtering and selection based on e.g. road types and numbers, rail link types and numbers, water link types and numbers, flight link types and numbers, and even on segment names and directions.

To cover a maximum variety of network situations, the information elements of the network description may be repeated as a whole, in order to describe a link that affects, for example, several roads having the same physical route (e.g. A8 Dreieck Leonberg – Kreuz Stuttgart, A81 Dreieck Leonberg – Kreuz Stuttgart, E52 Dreieck Leonberg – Kreuz Stuttgart), or may be repeated in parts, in order to describe a single link that has various names in one or multiple languages. To gain maximum flexibility all elements in the network description container, apart from network layer and link type are optional in order to describe also, for example, small roads without a road (link) number.

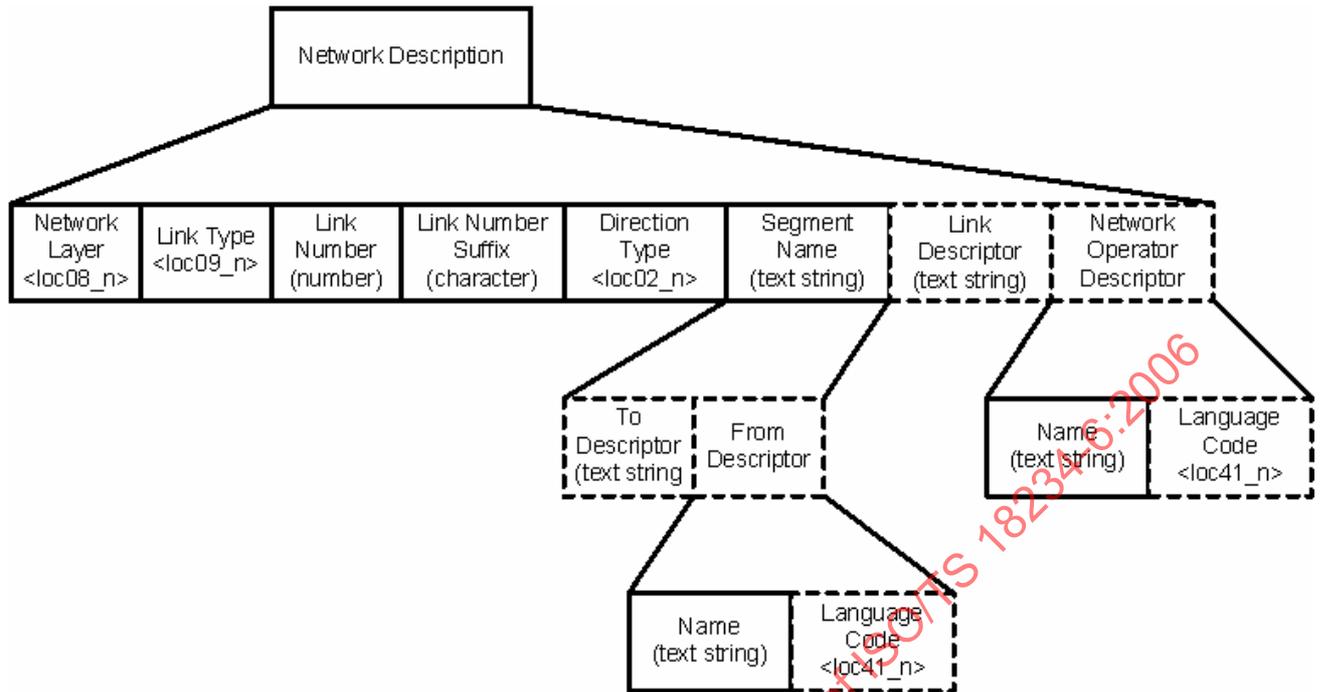


Figure 14 — Network description details

To illustrate how some of the above elements should be used the following examples provide a guide:

EXAMPLE 1 In the case of the M25, network description could be used as follows:

Network Layer = Loc08_01 > Road Network
 Link Type = Loc09_01 > Motorway (if presentation In English)
 Link Number = 25 > 25
 Link Number Suffix = > not used

EXAMPLE 2 In the case of a road in Stuttgart, which is called the 'B27a', network description could be used as follows:

Network Layer = Loc08_01 > Road Network
 Link Type = Loc09_02 > Bundesstrasse (if presentation in German)
 Link Number = 27 > 27
 Link Number Suffix = 'a' > a

EXAMPLE 3 In the case of a German rail link called 'IC 576', network description could be used as follows:

Network Layer = Loc08_05 > Rail Network
 Link Type = Loc13_03 > Intercity or IC
 Link Number = 576 > 576
 Link Number Suffix = > not used

The link_descriptor may be used, if there exists a specific name for the part of the road, which is described by network description (e.g. London North Circular road). Usually the segment name should be enough to describe the link sufficiently. The elements: network_layer, link_type and link_number are those elements in the network description, which describe the network information. Based on this it is possible for a text-based receiver to filter and select TPEG messages for the end-user.

5.1.2.3 Node description

The node description describes single points or complex nodes, which are part of a network. It is an element of the additional location descriptions container.

Filtering and selection may be achieved through node type or the defined structure of the element or through the associated area reference and/or network description.

The node description is a recursive data structure, which may be used to describe all kinds of (traffic) nodes from the very simple to a very complex one. A single point, e.g. on a road, needs no recursion, but for a multimodal node the structure may be repeated as many times as sub-nodes need to be described. This method equals the definition for connected points inside the TPEG-Loc element, Location Co-ordinates.

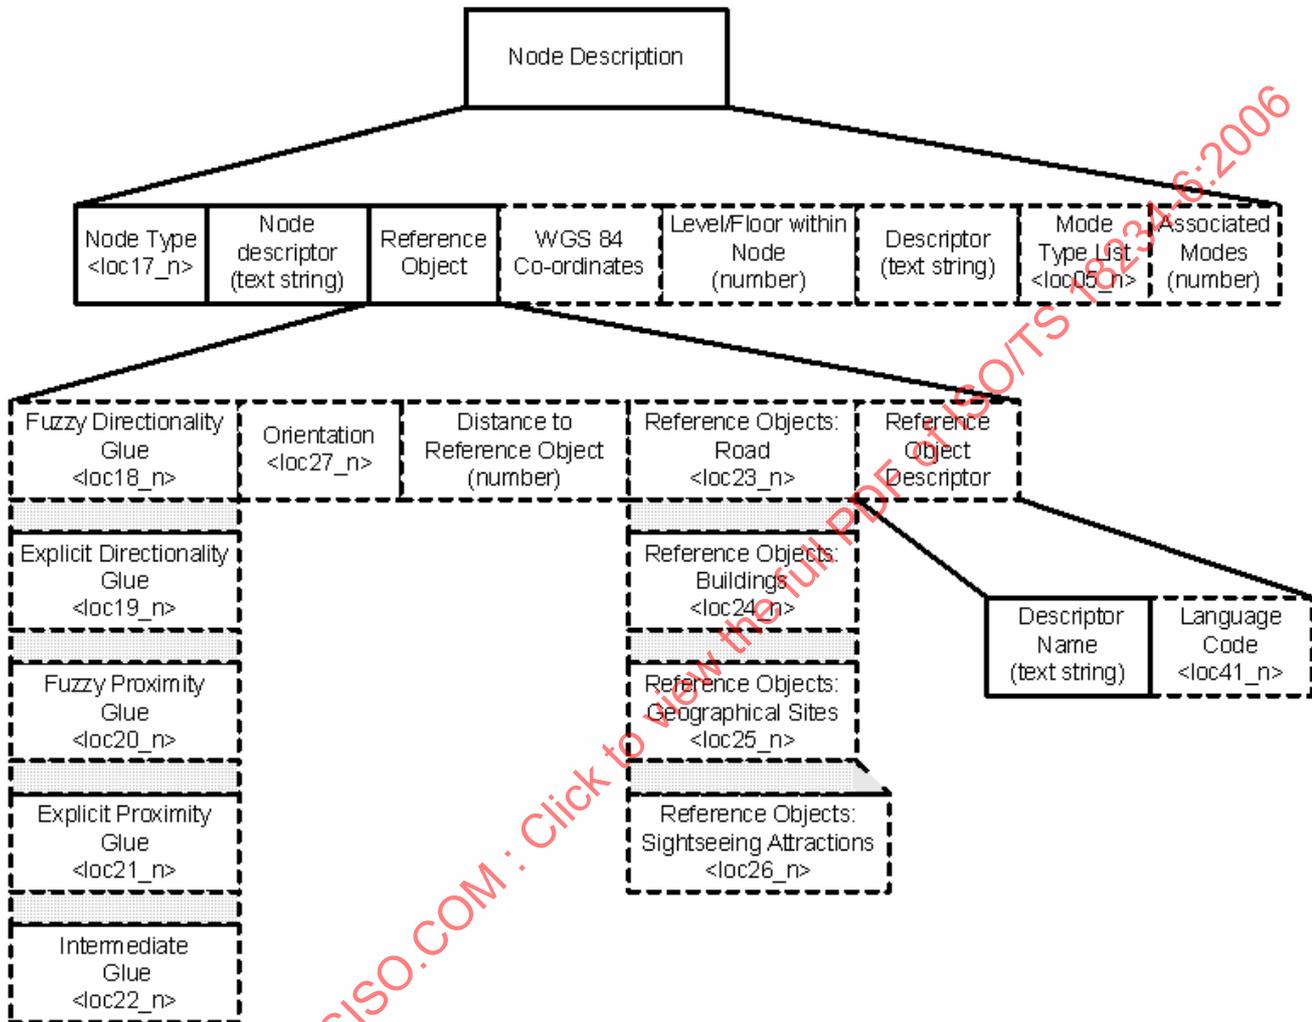


Figure 15 — Node description details

5.2 Structure of TPEG-Loc

5.2.1 TPEG location container

location_container (default_language/loc41,[,..])

location_co-ordinates : Section 5.2.2

additional_location_descriptions : Section 5.2.3

5.2.2 Location co-ordinates

location_co-ordinates (location_type/loc01, []..)

mode_type_list ([]..)

modes_of_transport(modes_of_transport/loc05)

direction_type(direction_type/loc02)

point

WGS 84 (longitude, latitude, []..)

expansion (radius_of_circle/m)

height (height_descriptor/loc04, height/m)

descriptor (descriptor_type/loc03, text/s_string, []..)

language (language_code/loc41)

5.2.3 Additional location descriptions

additional_location_descriptions(area_reference, []..)

area_reference : Section 5.2.3.1

network_description : Section 5.2.3.2

node_description : Section 5.2.3.3

5.2.3.1 Area reference

area_reference(country_code/loc40, area_tree_version/byte, []..)

area_tree_entry(level/byte, branch/word, predecessor_branch/word, []..)

area_type (area_type/loc06)

area_qualifier (area_qualifier/loc07)

area_descriptor(area_name(text/s_string), [] ...)

language (language_code/loc41)

5.2.3.2 Network description

network_description(network_layer/loc08, link_type/loc_z, []..)

link_number (byte)

link_number_suffix (character)

direction_type (direction_type/loc02)

segment_name ([] ..)

from_descriptor(from_name(text/s_string), []..)

language (language_code/loc41),

to_descriptor(to_name(text/s_string), []..)

language (language_code/loc41))

link_descriptor (link_name (text/s_string), []..)

language (language_code/loc41))

network_operator_descriptor (network_operator_name (text/s_string), []..)

language (language_code/loc41))

5.2.3.3 Node description

node_description(node_type/loc17, []..)

node_descriptor (node_name (text/s_string), []..)

language (language_code/loc41)

reference_object([]..)

fuzzy_directionality_glue(fuzzy_directionality_glue/loc18)

explicit_directionality_glue(explicit_directionality_glue/loc19)

fuzzy_proximity_glue(fuzzy_proximity_glue/loc20)

explicit_proximity_glue(explicit_proximity_glue/loc21)

intermediate_glue(intermediate_glue/loc22)

orientation (orientation/loc27)

distance(distance/numag)

road_object(road_object/loc23)

building(building/loc24)

geographical_site(geographical_site/loc25)

sightseeing_attraction(sightseeing_attraction/loc26)

reference_object_descriptor (reference_object_name(text/s_string), []..)

language (language_code/loc41)

WGS 84 (longitude, latitude, []..)

expansion (radius_of_circle/m)

height (height_descriptor/loc04, height/m)

floor(floor/ signed_byte)

mode_type_list ([]..)

modes_of_transport/loc05

associated_modes(number_of_modes, []..)

node_description : defined in 5.2.3.3

5.3 Coding of location container

5.3.1 TPEG-Loc container

<tpeg_loc_container>:=	
<loc41>	: Default language for TPEG-Loc components
m * <tpeg_loc_component(>;	: TPEG-Loc components

5.3.1.1 TPEG-Loc component template

<tpeg_loc_component(x)>:=	: TPEG-Loc component template
<intunti>(id),	: Identifier, id = x hex
<intunli>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.2 Location co-ordinates

<tpeg_loc_component(00)>:=	: Location co-ordinates component
<intunti>(id),	: Identifier, id = 00 hex
<intunli>(n),	: Length, n, of component data in bytes
<loc01>,	: Location type, TPEG table loc01
m * <co-ordinates_component(>;	: Location co-ordinates components

5.3.1.2.1 Location co-ordinates template

<co-ordinates_component(x)>:=	: Location co-ordinates component template
<intunti>(id),	: Identifier, id = x hex
<intunli>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.2.2 Mode type list

<co-ordinates_component(00)>:=	: Mode type list
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
m * <mode_component(>);	: Mode of transport components

5.3.1.2.2.1 Mode type list template

<mode_component(x)>:=	: Mode type list component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.2.2.2 Mode of transport

<mode_component(00)>:=	: Mode of transport
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc05>;	: Mode of transport, TPEG table loc05

5.3.1.2.3 Direction type

<co-ordinates_component(03)>:=	: Direction type
<intunti>(id),	: Identifier, id = 03 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc02>;	: Direction type, TPEG table loc02

5.3.1.2.4 Location point

<co-ordinates_component(04)>:=	: Location point
<intunti>(id),	: Identifier, id = 04 hex
<intunti>(n),	: Length, n, of component data in bytes
m * <location_point_component(>);	: Location point components

5.3.1.2.4.1 Location point component template

<location_point_component(x)>:=	: Location point component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.2.4.2 WGS 84

<location_point_component(00)>:=	: WGS 84
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<intsilo>(longitude),	: Longitude (in 10 micro-degrees units)
<intsilo>(latitude),	: Latitude (in 10 micro-degrees units)
m * <WGS84_component()>;	: WGS 84 components

5.3.1.2.4.2.1 WGS 84 template

<WGS84_component(x)>:=	: WGS 84 component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.2.4.2.2 Expansion

<WGS84_component(00)>:=	: Expansion
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<intunli>(r);	: Radius of circle (in metres * 10)

5.3.1.2.4.2.3 Height

<WGS84_component(01)>:=	: Height
<intunti>(id),	: Identifier, id = 01 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc04>;	: Height descriptor, TPEG table loc04
<intsili>(h);	: Height in metres (signed)

5.3.1.2.4.3 Descriptor

<location_point_component(01)>:=	: Descriptor
<intunti>(id),	: Identifier, id = 01 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc03>,	: Descriptor type, TPEG table loc03
<short_string>(name),	: Descriptor
m * <descriptor_component(>);	: Descriptor components

5.3.1.2.4.3.1 Descriptor template

<descriptor_component(x)>:=	: Descriptor component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.2.4.3.2 Language code

<descriptor_component(00)>:=	: Language
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3 Location descriptions

<mpeg_loc_component(01)>:=	: Location descriptions component
<intunti>(id),	: Identifier, id = 01 hex
<intunli>(n),	: Length, n, of component data in bytes
m * <descriptions_component(>;	: Location descriptions components

5.3.1.3.1 Location descriptions template

<descriptions_component(x)>:=	: Location descriptions component template
<intunti>(id),	: Identifier, id = x hex
<intunli>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.2 Area reference

<descriptions_component(00)>:=	: Area reference
<intunti>(id),	: Identifier, id = 00 hex
<intunli>(n),	: Length, n, of component data in bytes
<loc40>,	: 2-Alpha country code
<intunti>(ver),	: Area tree version number
m * <area_reference_component()>;	: Area reference components

5.3.1.3.2.1 Area reference component template

<area_reference_component(x)>:=	Area reference component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.2.2 Area tree entry

<area_reference_component(00)>:=	: Area tree entry
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<intunti>(level),	: Area tree level (index part1)
<intunli>(branche),	: Area tree branche (index part2)
<intunli>(predecessor),	: Predecessor branche (index part3)
m * <area_tree_entry_component()>;	: Area tree entry components

5.3.1.3.2.2.1 Area tree entry component template

<area_tree_entry_component(x)>:=	: Area tree entry component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.2.2.2 Area type

<area_tree_entry_component(00)>:=	: Area type
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc06>;	: Area type, TPEG table loc06

5.3.1.3.2.2.3 Area qualifier

<area_tree_entry_component(01)>:=	: Area qualifier
<intunti>(id),	: Identifier, id = 01 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc07>;	: Area qualifier, TPEG table loc07

5.3.1.3.2.2.4 Area descriptor

<area_tree_entry_component(02)>:=	: Area descriptor
<intunti>(id),	: Identifier, id = 02 hex
<intunti>(n),	: Length, n, of component data in bytes
<short_string>(area),	: Area name
m * <area_descriptor_component()>;	: Area descriptor components

5.3.1.3.2.2.4.1 Area descriptor component template

<area_descriptor_component(x)>:=	: Area descriptor component template
<intunti>(id),	: Identifier, id = x
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.2.2.4.2 Language code

<area_descriptor_component(00)>:=	: Language code
<intunti>(id),	: Identifier, id = 00
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3.3 Network description

<descriptions_component(01)>:=	: Network description
<intunti>(id),	: Identifier, id = 01 hex
<intunli>(n),	: Length, n, of component data in bytes
<loc08>(layer),	: Network layer, TPEG table loc08
<intunti>(subtype),	: Link_type according to table given in 5.4.5
m * <network_description_component()>;	: Network description components

5.3.1.3.3.1 Network description component template

<network_description_component(x)>:=	: Network description component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.3.2 Link number

<network_description_component(00)>:=	: Link number
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<intunli>(linknum);	: Link number e.g. "52" in case of link: E 52

5.3.1.3.3.3 Link number suffix

<network_description_component(01)>:=	: Link number suffix
<intunti>(id),	: Identifier, id = 01 hex
<intunti>(n),	: Length, n, of component data in bytes
<ch_def>(suffix);	: Link number suffix

5.3.1.3.3.4 Direction type

<network_description_component(02)>:=	: Direction type
<intunti>(id),	: Identifier, id = 02 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc02>;	: Direction relating "from-to", TPEG table loc02

5.3.1.3.3.5 Segment name

<network_description_component(03)>:=	: Segment name
<intunti>(id),	: Identifier, id = 03 hex
<intunti>(n),	: Length, n, of component data in bytes
m * <segment_name_component()>;	: Segment name components

5.3.1.3.3.5.1 Segment name component template

<segment_name_component(x)>:=	: Segment name component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.3.5.2 “From” descriptor

<segment_name_component(00)>:=	: “From” descriptor
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<short_string>(from),	: “From” name
m * <from_descriptor_component(>;	: “From” descriptor component data

5.3.1.3.3.5.2.1 “From” descriptor component template

<from_descriptor_component(x)>:=	: “From” descriptor component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.3.5.2.2 Language code

<from_descriptor_component(00)>:=	: Language code
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3.3.5.3 “To” descriptor

<segment_name_component(01)>:=	: “To” descriptor
<intunti>(id),	: Identifier, id = 01 hex
<intunti>(n),	: Length, n, of component data in bytes
<short_string>(to),	: “To” name
m * <to_descriptor_component(>;	: “To” descriptor components

5.3.1.3.3.5.3.1 "To" descriptor component template

<to_descriptor_component(x)>:=	: "To" descriptor component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.3.5.3.2 Language code

<to_descriptor_component(00)>:=	: Language code
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3.3.6 Link descriptor

<network_description_component(04)>:=	: Link descriptor
<intunti>(id),	: Identifier, id = 04 hex
<intunti>(n),	: Length, n, of component data in bytes
<short_string>(link),	: Link name
m * <link_descriptor_component()>;	: Link descriptor components

5.3.1.3.3.6.1 Link descriptor component template

<link_descriptor_component(x)>:=	: Link descriptor component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.3.6.2 Language code

<link_descriptor_component(00)>:=	: Language code
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3.3.7 Network operator descriptor

<network_description_component(05)>:=	: Network operator descriptor
<intunti>(id),	: Identifier, id = 05 hex
<intunti>(n),	: Length, n, of component data in bytes
<short_string>(operator),	: Network operator name
m * <network_operator_descriptor_component(>);	: Network operator descriptor components

5.3.1.3.3.7.1 Network operator descriptor component template

<network_operator_descriptor_component(x)>:=	: Network operator descriptor component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.3.7.2 Language code

<network_operator_descriptor_component(00)>:=	: Language code
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3.4 Node description

<descriptions_component(02)>:=	: Node description
<intunti>(id),	: Identifier, id = 02 hex
<intunli>(n),	: Length, n, of component data in bytes
<loc17>,	: Node type, TPEG table loc17
m * <node_description_component(>);	: Node description components

5.3.1.3.4.1 Node description template

<node_description_component(x)>:=	: Node description component template
<intunti>(id),	: Identifier, id = x hex
<intunli>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.4.2 Node descriptor

<node_description_component(00)>:=	: Node descriptor
<intunti>(id),	: Identifier, id = 00 hex
<intunli>(n),	: Length, n, of component data in bytes
<short_string>(node),	: Node name
m * <node_descriptor_component(>);	: Node descriptor components

5.3.1.3.4.2.1 Node descriptor component template

<node_descriptor_component(x)>:=	: Node descriptor component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.4.2.2 Language code

<node_descriptor_component(00)>:=	: Language code
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3.4.3 Reference object

<node_description_component(01)>:=	: Reference object
<intunti>(id),	: Identifier, id = 01 hex
<intunli>(n),	: Length, n, of component data in bytes
m * <reference_object_component(>);	: Reference object components

5.3.1.3.4.3.1 Reference object component template

<reference_object_component(x)>:=	: Reference object component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.4.3.2 Fuzzy directionality glue

<reference_object_component(00)>:=	: Fuzzy directionality glue
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc18>;	: Fuzzy directionality glue, TPEG table loc18

5.3.1.3.4.3.3 Explicit directionality glue

<reference_object_component(01)>:=	: Explicit directionality glue
<intunti>(id),	: Identifier, id = 01 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc19>;	: Explicit directionality glue, TPEG table loc19

5.3.1.3.4.3.4 Fuzzy proximity glue

<reference_object_component(02)>:=	: Fuzzy proximity glue
<intunti>(id),	: Identifier, id = 02 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc20>;	: Fuzzy proximity glue, TPEG table loc20

5.3.1.3.4.3.5 Explicit proximity glue

<reference_object_component(03)>:=	: Explicit proximity glue
<intunti>(id),	: Identifier, id = 03 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc21>;	: Explicit proximity glue, TPEG table loc21

5.3.1.3.4.3.6 Intermediate glue

<reference_object_component(04)>:=	: Intermediate glue
<intunti>(id),	: Identifier, id = 04 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc22>;	: Intermediate glue, TPEG table loc22

5.3.1.3.4.3.7 Orientation

<reference_object_component(05)>:=	: Orientation
<intunti>(id),	: Identifier, id = 05 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc27>;	: Orientation, TPEG table loc27

5.3.1.3.4.3.8 Distance

<reference_object_component(06)>:=	: Distance
<intunti>(id),	: Identifier, id = 06 hex
<intunti>(n),	: Length, n, of component data in bytes
<numag>(m);	: Distance in metres

5.3.1.3.4.3.9 Road object

<reference_object_component(07)>:=	: Road object
<intunti>(id),	: Identifier, id = 07 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc23>;	: Road object, TPEG table loc23

5.3.1.3.4.3.10 Building

<reference_object_component(08)>:=	: Building
<intunti>(id),	: Identifier, id = 08 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc24>;	: Building, TPEG table loc24

5.3.1.3.4.3.11 Geographical site

<reference_object_component(09)>:=	: Geographical site
<intunti>(id),	: Identifier, id = 09 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc25>;	: Geographical site, TPEG table loc25

5.3.1.3.4.3.12 Sightseeing attraction

<reference_object_component(0A)>:=	: Sightseeing attraction
<intunti>(id),	: Identifier, id = 0A hex
<intunti>(n),	: Length, n, of component data in bytes
<loc26>;	: Sightseeing attraction, TPEG table loc26

5.3.1.3.4.3.13 Reference object descriptor

<reference_object_component(0B)>:=	: Reference object descriptor
<intunti>(id),	: Identifier, id = 0B hex
<intunti>(n),	: Length, n, of component data in bytes
<short_string>(ref_object),	: Reference object name
m * <reference_object_descriptor_component()>;	: Reference object descriptor components

5.3.1.3.4.3.13.1 Reference object descriptor component template

<reference_object_descriptor_component(x)>:=	: Reference object descriptor component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.4.3.13.2 Language code

<reference_object_descriptor_component(00)>:=	: Language code
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc41>;	: Language code, TPEG table loc41

5.3.1.3.4.4 WGS 84

<node_description_component(02)>:=	: WGS 84
<intunti>(id),	: Identifier, id = 02 hex
<intunli>(n),	: Length, n, of component data in bytes
<intsilo>(longitude),	: Longitude (in 10 micro-degrees units)
<intsilo>(latitude),	: Latitude (in 10 micro-degrees units)
m * <WGS84_component()>;	: WGS 84 components

5.3.1.3.4.4.1 WGS 84 component template

<WGS84_component(x)>:=	: WGS 84 component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.4.4.2 Expansion

<WGS84_component(00)>:=	: Expansion
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<intunli>(r);	: Radius of circle (in metres * 10)

5.3.1.3.4.4.3 Height

<WGS84_component(01)>:=	: Height
<intunti>(id),	: Identifier, id = 01 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc04>;	: Height descriptor, TPEG table loc04
<intsili>(h);	: Height in metres (signed)

5.3.1.3.4.5 Floor

<node_description_component(03)>:=	: Floor
<intunti>(id),	: Identifier, id = 03 hex
<intunli>(n),	: Length, n, of component data in bytes
<intsiti>(floor);	: Floor

5.3.1.3.4.6 Mode type list

<node_description_component(04)>:=	: Mode type list
<intunti>(id),	: Identifier, id = 04 hex
<intunli>(n),	: Length, n, of component data in bytes
m * <mode_component(>;	: Mode components

5.3.1.3.4.6.1 Mode component template

<mode_component(x)>:=	: Mode component template
<intunti>(id),	: Identifier, id = x hex
<intunti>(n),	: Length, n, of component data in bytes
n * <byte>;	: Component data

5.3.1.3.4.6.2 Mode of transport

<mode_component(00)>:=	: Mode of transport
<intunti>(id),	: Identifier, id = 00 hex
<intunti>(n),	: Length, n, of component data in bytes
<loc05>;	: Mode of transport, TPEG table loc05

5.3.1.3.4.7 Associated modes

<node_description_component(05)>:=	: Associated modes
<intunti>(id),	: Identifier, id = 05 hex
<intunli>(n),	: Length, n, of component data in bytes
<intunti>(m),	: Number of associated modes
m * <descriptions_component(02)>;	: Associated modes (= node reference "repeated")

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 18234-6:2006

5.4 TPEG-Loc application primitives

5.4.1 TPEG tables - loc01 to loc27 and loc40 to loc41

Table 2 — TPEG tables – loc01 to loc27 and loc40 to loc41

<loc01>:= <intunti>;	: Location type : TPEG table loc01
<loc02>:= <intunti>;	: Direction type : TPEG table loc02
<loc03>:= <intunti>;	: Descriptor type : TPEG table loc03
<loc04>:= <intunti>;	: Height descriptor : TPEG table loc04
<loc05>:= <intunti>;	: Modes of transport : TPEG table loc05
<loc06>:= <intunti>;	: Area type : TPEG table loc06
<loc07>:= <intunti>;	: Area qualifier : TPEG table loc07
<loc08>:= <intunti>;	: Network layer : TPEG table loc08
<loc09>:= <intunti>;	: Road link type : TPEG table loc09
<loc10>:= <intunti>;	: Bus link type : TPEG table loc10
<loc11>:= <intunti>;	: Metro rail link type : TPEG table loc11
<loc12>:= <intunti>;	: Tram link type : TPEG table loc12

Table 2 (continued)

<loc13>:= <intunti>;	: Train link type : TPEG table loc13
<loc14>:= <intunti>;	: Telecabin link type : TPEG table loc14
<loc15>:= <intunti>;	: Water transport link type : TPEG table loc15
<loc16>:= <intunti>;	: Air link type : TPEG table loc16
<loc17>:= <intunti>;	: Node type : TPEG table loc17
<loc18>:= <intunti>;	: Fuzzy directionality glue word : TPEG table loc18
<loc19>:= <intunti>;	: Explicit directionality glue word : TPEG table loc19
<loc20>:= <intunti>;	: Fuzzy proximity glue word : TPEG table loc20
<loc21>:= <intunti>;	: Explicit proximity glue word : TPEG table loc21
<loc22>:= <intunti>;	: Intermediate glue word : TPEG table loc22
<loc23>:= <intunti>;	: Road objects : TPEG table loc23
<loc24>:= <intunti>;	: Buildings : TPEG table loc24
<loc25>:= <intunti>;	: Geographical sites : TPEG table loc25
<loc26>:= <intunti>;	: Sightseeing attractions : TPEG table loc26

Table 2 (continued)

<loc27>:=	: Directions
<intunti>;	: TPEG table loc27
<loc40>:=	: Country code
<intunti>;	: TPEG table loc40
<loc41>:=	: Language code
<intunti>;	: TPEG table loc41

5.4.2 TPEG tables (loc01 to loc27 and loc40 to loc41) indexing

The TPEG tables (loc) numbers and code values have no order-significance and only have number values randomly assigned during the development process. In order to aid navigation of these tables the following two sections provide an “internal index” to the tables, firstly in name order and secondly in number order.

5.4.3 TPEG tables (loc01 to loc27 and loc40 to loc41) – ordered by names

Table 3 — TPEG tables (loc01 to loc27 and loc40 to loc41) – ordered by names

Description	Table	Description	Table
air_link_type	16	language_code	41
area_qualifier	07	location_type	01
area_type	06	metro_rail_link_type	11
buildings	24	modes_of_transport	05
bus_link_type	10	network_layer	08
country_code	40	node_type	17
descriptor_type	03	orientations	27
direction_type	02	road_link_type	09
explicit_directionality_glue	19	road_objects	23
explicit_proximity_glue	21	sightseeing_attractions	26
fuzzy_directionality_glue	18	telecabin_link_type	14
fuzzy_proximity_glue	20	train_link_type	13
geographical_sites	25	tram_link_type	12
height_decriptor	04	water_transport_link_type	15
intermediate_glue	22	~ end of version 3.0 tables ~	

5.4.4 TPEG tables (loc01 to loc27 and loc40 to loc41) – ordered by table numbers

Table 4 — TPEG tables (loc01 to loc27 and loc40 to loc41) – ordered by table numbers

Table	Description	Table	Description
01	location_type	17	node_type
02	direction_type	18	fuzzy_directionality_glue
03	descriptor_type	19	explicit_directionality_glue
04	height_descriptor	20	fuzzy_proximity_glue
05	modes_of_transport	21	explicit_proximity_glue
06	area_type	22	intermediate_glue
07	area_qualifier	23	road_objects
08	network_layer	24	buildings
09	road_link_type	25	geographical_sites
10	bus_link_type	26	sightseeing_attractions
11	metro_rail_link_type	27	orientations
12	tram_link_type
13	train_link_type	40	country_code
14	telecabin_link_type	41	language_code
15	water_transport_link_type		~ end of version 3.0 tables ~
16	air_link_type		

5.4.5 TPEG tables (loc01 to loc27 Version 3.0) TPEG table loc08 cross-references

The specific link type can only be decoded given the code for the network layer. Therefore a cross-reference table exists to inform a client decoder what TPEG table it should use to decode the specific link type, given the code for the network layer type.

NOTE Some network layers do not have a link_type table defined. In these cases a code (one byte, set to 0) for the link_type must be transmitted; however TPEG decoders should ignore the code for the link_type.

Table 5 — Cross-references

Code	CEN-English 'Word'	Use of related TPEG Table (link_type), table name:
0	unknown	Unknown
1	road network	TPEG table loc09 "road_link_type"
2	bus network	TPEG table loc10 "bus_link_type"
3	metro rail network	TPEG table loc11 "metro_rail_link_type"
4	tram network	TPEG table loc12 "tram_link_type"
5	rail network	TPEG table loc13 "rail_link_type"
6	telecabin	TPEG table loc14 "telecabin_link_type"
7	water transport network	TPEG table loc15 "water_transport_link_type"
8	airway network	TPEG table loc16 "air_link_type"

5.4.6 TPEG tables – structure and semantics

TPEG tables provide a list of the CEN-English ‘word’ with associated code value, and additionally comments, and where helpful, examples are given. The CEN-English ‘word’ describes a single entity as far as possible with a single word, but it is necessary to sometimes use a short phrase to describe the entity, e.g. north-east bound; nevertheless, TPEG tables are in essence tables of singular words. Where the coding allows multiplicity of the entity then the CEN-English ‘word’ shall be singular. In other cases there are a number of logical plurals, e.g. both ways, which are commented accordingly.

The key principle for the use of the CEN-English ‘word’ code value is that all client devices shall be designed to make their own assessment of the context and multiplicity, in order to deliver a semantically acceptable message in the chosen display language.

5.4.7 TPEG tables (loc01 to loc27 and loc40 to loc41 Version 3.0)

Table 6 — TPEG table loc01: location_type

Code	CEN-English ‘Word’	Comments	Examples
0	unknown	<i>not used</i>	
1	large area	location type 1	
2	nodal area	location type 2	
3	segment	location type 3 (directional)	
4	reserved for future use	If this code is received the default word for this table shall be displayed	
5	intersection point	location type 5	
6	framed point	location type 6	
7	non-linked point	location type 7	
8	connected point	location type 8	
..	~ end of version 3.0 ~		
..			
255	Unknown	- the table default word -	

Table 7 — TPEG table loc02: direction_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	opposite		
2	both ways	logical plural	
3	north bound		
4	north-east bound		
5	east bound		
6	south-east bound		
7	south bound		
8	south-west bound		
9	west bound		
10	north-west bound		
11	clockwise		
12	anti-clockwise		
13	inner-ring		
14	outer-ring		
15	all directions	logical plural	
..	<i>~ end of version 3.0 ~</i>		
..			
255	unknown	- the table default word -	

Table 8 — TPEG table loc03: descriptor_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	area name		in DE: Schwarzwald
2	node name		
3	from name (segment)		
4	to name (segment)		
5	link name	i.e. road name	
6	local link name		
7	tpeg-ilc name 1		
8	tpeg-ilc name 2		
9	tpeg-ilc name 3		
10	intersection name		
11	point name		
12	non-linked point name		
13	multimode point name		in UK: Heathrow Airport
14	submode point name		in UK: Heathrow Airport - underground station
15	mode name		railway
16	internal division name		in UK: Heathrow Airport – Terminal 3
17	airport name		

Code	CEN-English 'Word'	Comments	Examples
18	railway station name		in FR, Paris: Gare du Nord
19	metro station name		in DE, Munich: Marienplatz
20	terminal identifier		in CH: GVA International
21	gate identifier		Gate 55
22	platform identifier		
23	building name		in UK, London: Centre Point
24	town name		in UK: Battle
25	county name		in UK: East Sussex
26	region name		in UK: South East England
27	nation name		in UK: England
28	river name		in FR: Loire
29	canal name		in UK: Kennet and Avon
30	lake name		in CH: Lac Lemman
31	sea name		North Sea
32	junction name	name or number	in UK: J19 in DE: Frankfurter Kreuz
33	bus stop name		
34	IATA identifier	i.e. code for airport name	in UK: "LGW"
35	tidal river name		in UK: Medway
36	bus stop identifier	i.e. national bus stop number	in UK: NaPTAN number
37	ferry port name		in UK: Hollyhead
38	administrative area name		In UK: Highways Agency area
39	police force control area name		
40	administrative reference name		In UK: Highways Agency road
41	point-of-interest name		
42	parking facility name		
43	service area name		
..	~ end of version 3.0 ~		
..			
255	descriptor name	- the table default word -	

Table 9 — TPEG table loc04: height_descriptor

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	above	relative to location	
2	below	relative to location	
3	at	relative to location	
4	above sea level		
5	below sea level		
6	at sea level		
7	above street level		
8	below street level		
9	at street level		
..	<i>~ end of version 3.0 ~</i>		
..			
255	undefined	- the table default word -	

Table 10 — TPEG table loc05: modes_of_transport

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	road		
2	railway	full-size carriages	in UK: Connex SE
3	coach		
4	suburban railway	full-size carriages	in DE: Berlin S-Bahn
5	underground	also metro	in FR: Ligne 14
6	bus	also trolleybus	
7	tram		in BE: Pre-metro
8	water transport	canal, river and sea	
9	aircraft		
10	telecabin		
11	funicular		
12	taxi		
13	self drive		
14	cable-drawn boat		
15	monorail		
16	light railway	light-weight carriages	
..	<i>~ end of version 3.0 ~</i>		
..			
255	undefined	- the table default word -	

Table 11 — TPEG table loc06: area_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	continent		Europe
2	country		Italy
3	first subdivision of a country	largest defined area	Federal states, Länder, Scotland
4	second subdivision of a country	regions	Provence, South-East England, Schwaben
5	third subdivision of a country	subdivision of a region	County, Kreis, Département, Kanton
6	fuzzy		Schwarzwald, Vosges, Lake District, Marches
7	city		in UK: Canterbury
8	town		in UK: Battle
9	village		in UK: Catsfield
10	urban district		in UK: Rother
..	~ end of version 3.0 ~		
..			
255	Unknown	- the table default word -	

Table 12 — TPEG table loc07: area_qualifier

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	part of		
2	higher part of		
3	lower part of		
4	low lying area of		
5	all of		
6	much of		
7	in the middle of		
8	in the centre of		
9	inside of		
10	outside of		
11	outskirts of	i.e. periphery of logical plural	
12	edge of		
13	bottom of		
14	top of		
15	greater		in UK: Greater London
16	northern part of		
17	north-eastern part of		
18	eastern part of		
19	south-eastern part of		
20	southern part of		
21	south-western part of		
22	western part of		
23	north-western part of		
..	~ end of version 3.0 ~		
..			
255	Unknown	- the table default word -	

Table 13 — TPEG table loc08: network_layer

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	road network		
2	bus network	also coach or trolleybus network	
3	metro rail network		
4	tram network		
5	rail network		
6	telecabin		
7	water transport network		
8	airline network		
9	underground rail network		
..	<i>~ end of version 3.0 ~</i>		
..			
255	Unknown	- the table default word -	

Table 14 — TPEG table loc09: road_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	motorway	first order road	in UK: Motorway
2	principal road	second order road	in UK: A-class road
3	secondary road	third order road	in UK: B-class road
4	local road	fourth order road	in UK: C-class road
5	unnumbered road	fifth order road	U
6	europaean route	E numbered road	E 52
7	deviation route		in DE: U 26, itinéraire bis
8	tourist route		in DE: Weinstrasse, Schwarzwaldhoch-strasse
9	route		in FR: périphérique
10	ferry	vehicle carrying ferry link	
11	railway	vehicle carrying railway link	
12	link	vehicle carrying link	
..	<i>~ end of version 3.0 ~</i>		
..			
255	road link	- the table default word -	

Table 15 — TPEG table loc10: bus_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	express	inter-city, with hourly or so services	in UK: London to Edinburgh
2	night bus	hourly or so services	in UK: London, N5 route
3	service bus	frequent services (no distinction for trolleybus or tram)	in CH: Geneva, Line 5 TPG (using scheduled service at signposted stops)
4	post bus	limited seating vehicle on postal route, not tightly scheduled	in UK: rural routes operated by Royal Mail
5	local bus	small 4/8 seater	in FR: Ferney-Voltaire Navette
6	regional bus	only occasional services	regular service in rural areas
7	school bus	stopping in special places and near schools	
8	special needs bus	vehicle for wheel chair users and people of limited mobility	
9	sightseeing bus	often start and stop at same place	in UK: London circular route
10	airport link bus	bus services between airports	in UK: 747 Express Bus between LHR and LGW
..	<i>~ end of version 3.0 ~</i>		
..			
255	bus link	- the table default word -	

Table 16 — TPEG table loc11: metro_rail_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	underground link		in UK: London: Circle line, in DE: Berlin: U-Bahn - U6 in FR: Paris: Metro - Ligne 4
2	suburban city train link		in UK: Thames Link: Farringdon to St Albans in DE: S-Bahn: Munich Airport to City in FR: RER: St Germain to Marne-la-Vallée
3	metro rail link		
4	airport rail link		in UK: Heathrow Express rail
5	mono-rail link		in DE: Schwebbahn Wuppertal
..	<i>~ end of version 3.0 ~</i>		
..			
255	metro rail link	- the table default word -	

Table 17 — TPEG table loc12: tram_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	service tram link	frequent services	in DE: Line 17 München (using scheduled service at signposted stops)
2	sightseeing tram link		in UK: Blackpool sea front route
..	~ end of version 3.0 ~		
..			
255	tram link	- the table default word -	

Table 18 — TPEG table loc13: train_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	international train link		Eurostar, TGV, Thalys
2	national train link		ICE, TGV, HST
3	inter-city train link		IC, HST
4	regional train link		IR, Thames Link
5	suburban train link		in UK: Silver Link Metro
6	local train link		in UK: Nene Valley Railway
7	tourist train link		in UK: Romney, Hythe & Dymchurch Railway
8	rack railway link		in CH: Roches de Naves
..	~ end of version 3.0 ~		
..			
255	train link	- the table default word -	

Table 19 — TPEG table loc14: telecabin_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	telecabin link		in FR: Crozet
2	funicular link		in CH: Territet, in FR: Montmatre
3	cable car link		in FR: Salève
4	elevator link		in PO: Lisbon
5	chair lift link		
6	drag lift link		
7	egg lift link		
8	mineral buckets link		in UK: Mountfield, East Sussex
..	<i>~ end of version 3.0 ~</i>		
..			
255	telecabin link	- the table default word -	

Table 20 — TPEG table loc15: water_transport_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	local passenger boat link		in IT: Venice waterbus
2	regional passenger boat link		Geneva lake, Vier Waldstattersee, Stockholm arhipel
3	national passenger boat link		Sweden – Gotland
4	international passenger boat link		Malmö - Copenhagen
5	local car ferry link		Lisbon harbour, Venice Lido-link
6	regional car ferry link		Holland - between the islands of Zeeland
7	national car ferry link		Sweden – Gotland
8	international car ferry link	including hovercraft	Between Belgium and Dover, Finlands Färjan
9	post boat link		Norway Bergen Sogne fjord
10	train ferry link		Helsingør - Helsingborg
11	road ferry link		in UK: Reedham Ferry Norfolk
12	airport boat link		in IT: San Marco - Venice Airport
13	sightseeing boat link		
14	school boat link		
..	<i>~ end of version 3.0 ~</i>		
..			
255	water transport link	- the table default word -	

Table 21 — TPEG table loc16: air_link_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	long haul scheduled intercontinental air link		Schiphol – New York
2	international scheduled air link		London - Lisbon
3	short haul international scheduled air link	city hopper	Amsterdam - Brussels
4	internal scheduled air link		London – Leeds
5	intercontinental charter air link		Frankfurt - Florida
6	international charter air link		London - Majorca
7	internal charter air link	event flights	Concorde round trip
8	sightseeing air link		Swiss Alps Interlaken, Las Vegas - Grand Canion
9	shuttle service air link		Boston – New York
10	helicopter service air link		New-York JFK – Manhattan
..	~ end of version 3.0 ~		
..			
255	air link	- the table default word -	

Table 22 — TPEG table loc17: node_type

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	mono mode point		
2	multimodal node		
..	~ end of version 3.0 ~		
..			
255	unknown	- the table default word -	

Table 23 — TPEG table loc18: fuzzy_directionally_glue

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	above		
2	over		
3	under		
4	below		
5	after		
6	before		
7	in front of		
8	behind		
9	beyond		
10	past		
11	outside		
12	inside		
13	down from		
14	down to		
15	up from		
16	up to		
17	from		
18	to		
19	towards		
20	approaching		
21	in the direction of	accurate direction	
22	direction	approximate direction	
..	~ end of version 3.0 ~		
..			
255	unknown	- the table default word -	

Table 24 — TPEG table loc19: explicit_directionality_glue

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	opposite		
2	via		
3	entrance to		
4	exit from		
..	~ end of version 3.0 ~		
..			
255	unknown	- the table default word -	

Table 25 — TPEG table loc2: fuzzy_proximity_glue

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	near by	vicinity of (within 1 km)	
2	height of		
3	close to	within a few hundred metres	
4	beside		
5	near		
6	next to	smallest distance	
..	<i>~ end of version 3.0 ~</i>		
..			
255	unknown	- the table default word -	

Table 26 — TPEG table loc21: explicit_proximity_glue

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	reserved for future use	If this code is received the default word for this table shall be displayed	
2	at		
3	on		
4	upon		
5	in		
..	<i>~ end of version 3.0 ~</i>		
..			
255	unknown	- the table default word -	

Table 27 — TPEG table loc22: intermediate_glue

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	between		
2	downhill		
3	uphill		
4	along		
5	through		
6	with		
..	<i>~ end of version 3.0 ~</i>		
..			
255	Unknown	- the table default word -	

Table 28 — TPEG table loc23: road_objects

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	junction		
2	roundabout		
3	bridge		
4	dam		
5	fuel station		
6	ringroad		
7	gyratory system	rotary one way road system	
8	road tunnel		
9	toll booth		
10	toll plaza		
11	flyover		
12	underpass		
13	traffic lights	logical plural	
14	road-rail crossing	in UK: level crossing	
15	marker post		kilometre or mile marker
16	exit		
17	cross road		
18	kiss and ride	area or lane for passenger set down only	
19	set-down	area or lane	
20	pick-up	area or lane	
21	set-down and pick-up	area or lane	
..	~ end of version 3.0 ~		
..			
255	unknown	- the table default word -	

Table 29 — TPEG table loc24: buildings

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	airport terminal		
2	ferry terminal		
3	railway car terminal		
4	railway station		
5	underground station	also metro	
6	bus station		
7	cable car station		
8	tram station		
9	rapid transit station		
10	manor		
11	church		
12	store		
13	retail park		
14	multi-story car park		
15	fire station		
16	ambulance station		
17	police station		
18	school		
19	university		
20	palace		
21	hospital		
22	hotel		
23	motel		
24	lighthouse		
25	mine		
26	swimming pool	indoor swimming pool building	
27	prison		
28	official building		
29	town hall		
30	pub		
31	restaurant		
32	bistro		
33	guest house		
34	café		
35	fast food restaurant		
36	military barracks	logical plural	
37	sports hall	logical plural	
38	exhibition hall		
39	convention centre		
40	cultural hall		in UK: London - Festival Hall
41	concert hall		

Code	CEN-English 'Word'	Comments	Examples
42	theatre		
43	opera house		
44	cinema		
45	museum		
46	tourist information office		
47	railway tunnel entrance		
48	water tower		
49	large telecommunications tower	> 30 metre tall logical plural	
50	small telecommunications tower	< 30 metre tall logical plural	
51	tower		
52	post building		
53	government building		
54	border checkpoint		
55	supermarket		
56	newsagent		
57	kindergarten		
58	senior citizens residence	logical plural	
59	college		
60	embassy		
61	waiting room		
62	toilets	logical plural	
..	~ end of version 3.0 ~		
..			
255	Unknown	the table default word -	

Table 30 — TPEG table loc25: geographical_sites

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	coast		
2	mountain		
3	mountainous region		in UK: "The Grampians" (Scotland)
4	airport area		
5	alpine region		
6	canal		
7	cave		
8	retail park		
9	car park		
10	park and ride area		
11	forest		
12	sports stadium	logical plural	
13	sports ground	logical plural	
14	golf course		
15	harbour		
16	marina		
17	island		
18	lake		
19	river		
20	swimming area		
21	leisure centre		
22	beach area		
23	mountain pass		
24	summit		
25	peninsula		
26	service area		
27	picnic area		
28	rest area	i.e. including large layby	
29	railway line		
30	military restricted area		
31	camping area		
32	caravan park		
33	community		
34	village		
35	fair ground		
36	waterfall		
37	market place		
38	park	i.e. green area possibly with trees	
39	view point		
40	border		
41	theme park		

Code	CEN-English 'Word'	Comments	Examples
42	industrial area		
43	race course		
44	science park		
45	city centre		
46	village centre		
47	town centre		
48	town		
49	city		
..	<i>~ end of version 3.0 ~</i>		
..			
255	Unknown	- the table default word -	

Table 31 — TPEG table loc26: sightseeing_attractions

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	botanical garden		
2	castle		
3	manor		
4	cave		
5	church		
6	geological site		
7	archaeological site		
8	ruined building		
..	<i>~ end of version 3.0 ~</i>		
..			
255	unknown	- the table default word -	

Table 32 — TPEG table loc27: orientations

Code	CEN-English 'Word'	Comments	Examples
0	unknown		
1	north		
2	north-east		
3	east		
4	south-east		
5	south		
6	south-west		
7	west		
8	north-west		
9	clockwise		
10	counter clockwise		
11	all directions	logical plural	
..	<i>~ end of version 3.0 ~</i>		
..			
255	Unknown	- the table default word -	

Table 33 — TPEG table loc40: country_code

Code	CEN-English Country Name	2-Alpha Code
0	unknown	
1	Afghanistan	AF
2	Albania	AL
3	Algeria	DZ
4	American Samoa	AS
5	Andorra	AD
6	Angola	AO
7	Anguilla	AI
8	Antarctica	AQ
9	Antigua and Barbuda	AG
10	Argentina	AR
11	Armenia	AM
12	Aruba	AW
13	Australia	AU
14	Austria	AT
15	Azerbaijan	AZ
16	Bahamas	BS
17	Bahrain	BH
18	Bangladesh	BD
19	Barbados	BB
20	Belarus	BY
21	Belgium	BE
22	Belize	BZ
23	Benin	BJ
24	Bermuda	BM
25	Bhutan	BT
26	Bolivia	BO
27	Bosnia and Herzegovina	BA
28	Botswana	BW
29	Bouvet Island	BV
30	Brazil	BR
31	British Indian Ocean Territory	IO
32	Brunei Darussalam	BN
33	Bulgaria	BG
34	Burkina Faso	BF
35	Burundi	BI
36	Cambodia	KH
37	Cameroon	CM
38	Canada	CA
39	Cape Verde	CV
40	Cayman Islands	KY
41	Central African Republic	CF