

---

---

**Earth-moving machinery —  
Functional safety —  
Part 5:  
Tables of performance levels**

*Engins de terrassement — Sécurité fonctionnelle —  
Partie 5: Tableaux des niveaux de performance*

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021



STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	v
Introduction.....	vi
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 General.....</b>	<b>4</b>
4.1 General principles.....	4
4.1.1 Safety requirements.....	4
4.1.2 Information for use.....	4
4.2 Mapping of functions to a SCS.....	4
4.3 Applicability of the listed MPL <sub>r</sub> to machines.....	4
4.4 Truncation.....	5
4.5 Effects of different technologies on MCSSA.....	5
4.6 Supporting diagrams and data for the tables of machine performance levels.....	5
<b>5 Additional MCSSA scenario information.....</b>	<b>6</b>
5.1 Traffic rate on road.....	6
5.2 Steering while roading.....	6
5.3 Slow/stop and machine speed.....	7
5.4 Work cycles.....	8
5.4.1 Dumpers.....	8
5.4.2 Excavators.....	8
5.4.3 Wheel loaders.....	9
5.4.4 Skid steer loaders.....	10
5.5 Swing/slew of backhoe loaders and excavators.....	11
5.5.1 H variable for working beside traffic or co-workers.....	11
5.5.2 P values for swinging into traffic or co-workers.....	12
5.6 Maximum foreseeable P variables for typical areas on a site.....	13
5.7 Seat belts.....	13
5.8 Maintenance tasks.....	13
5.9 Backhoe arm out and wheeled excavator or backhoe stabilizer down while travelling or roading.....	13
<b>Annex A (normative) Rigid frame dump trucks performance level tables.....</b>	<b>15</b>
<b>Annex B (normative) Articulated-frame dumpers equal to or greater than 22 000 kg performance level tables.....</b>	<b>25</b>
<b>Annex C (normative) Articulated-frame dumpers equal to or less than 22 000 kg performance level tables.....</b>	<b>30</b>
<b>Annex D (normative) Crawler excavators less than 109 000 kg performance level tables.....</b>	<b>36</b>
<b>Annex E (normative) Wheeled excavators performance level tables.....</b>	<b>51</b>
<b>Annex F (normative) Backhoe loaders performance level tables.....</b>	<b>66</b>
<b>Annex G (normative) Large wheel loaders equal to or greater than 24 000 kg performance level tables.....</b>	<b>77</b>
<b>Annex H (normative) Medium, small and compact wheel loaders less than 24 000 kg performance level tables.....</b>	<b>87</b>
<b>Annex I (normative) Wheeled and crawler skid steer loaders performance level tables.....</b>	<b>94</b>
<b>Annex J (normative) Landfill compactor performance level tables.....</b>	<b>103</b>
<b>Annex K (normative) Roller performance level tables.....</b>	<b>109</b>
<b>Annex L (normative) Grader performance level tables.....</b>	<b>116</b>

<b>Annex M (normative) Crawler dozer performance level tables</b> .....	<b>126</b>
<b>Annex N (normative) Pipelayer performance level tables</b> .....	<b>133</b>
<b>Annex O (normative) Crawler loader performance level tables</b> .....	<b>140</b>
<b>Annex P (normative) Wheeled dozer performance level tables</b> .....	<b>148</b>
<b>Annex Q (normative) Scraper performance level tables</b> .....	<b>153</b>
<b>Annex R (normative) Crawler excavators equal to or greater than 109 000 kg performance level tables</b> .....	<b>159</b>
<b>Annex S (normative) Cable excavator (front shovel) performance level tables</b> .....	<b>167</b>
<b>Annex T (normative) Cable excavator (dragline) performance level tables</b> .....	<b>173</b>
<b>Annex U (normative) Compact trencher less than 4 500 kg performance level tables</b> .....	<b>179</b>
<b>Annex V (normative) Medium trencher greater than or equal to 4 500 kg and less than 18 000 kg performance level tables</b> .....	<b>196</b>
<b>Annex W (normative) Heavy trencher greater than or equal to 18 000 kg performance level tables</b> .....	<b>205</b>
<b>Annex X (normative) Telescopic wheel loader performance level tables</b> .....	<b>216</b>
<b>Annex Y (normative) Compact tool carrier performance level tables</b> .....	<b>218</b>
<b>Annex Z (normative) Powered attachments performance level tables</b> .....	<b>225</b>
<b>Annex AA (normative) Miscellaneous functions</b> .....	<b>229</b>
<b>Bibliography</b> .....	<b>234</b>

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 127, *Earth-moving machinery*, Subcommittee SC 2, *Safety, ergonomics and general requirements*.

This first edition, together with ISO 19014-1, ISO 19014-2, ISO 19014-3 and ISO 19014-4, cancels and replaces the first editions (ISO 15998:2008 and ISO/TS 15998-2:2012), which have been technically revised.

The main changes are as follows:

- complete reassessment and associated rewriting of the document, following the process according to ISO 19014-1;
- added detail to assist users in determining if the assessments contained herein are applicable to their product;
- added detail to assist system designers in understanding what hazards and failure types apply to what machine performance level requirements.

A list of all parts in the ISO 19014 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

This document addresses functional safety of all types of energy systems utilized by earth-moving machinery.

The structure of safety standards in the field of machinery is as follows:

Type-A standards (basis standards) give basic concepts, principles for design and general aspects that can be applied to machinery.

Type-B standards (generic safety standards) deal with one or more safety aspects, or one or more types of safeguards that can be used across a wide range of machinery:

- type-B1 standards on particular safety aspects (e.g. safety distances, surface temperature, noise);
- type-B2 standards on safeguards (e.g. two-hands controls, interlocking devices, pressure sensitive devices, guards).

Type-C standards (machinery safety standards) deal with detailed safety requirements for a particular machine or group of machines.

This document is a type C standard as stated in ISO 12100.

This document contains a list of Machine Performance Level requirements (MPL<sub>r</sub>) by function and earth-moving machinery type, determined through the process outlined in ISO 19014-1.

This document is of relevance, in particular, for the following stakeholder groups representing the market players with regard to machinery safety:

- machine manufacturers (small, medium and large enterprises);
- health and safety bodies (regulators, accident prevention organizations, market surveillance etc.).

Others can be affected by the level of machinery safety achieved with the means of the document by the above-mentioned stakeholder groups:

- machine users/employers (small, medium and large enterprises);
- machine users/employees (e.g. trade unions, organizations for people with special needs);
- service providers, e. g. for maintenance (small, medium and large enterprises);
- consumers (in case of machinery intended for use by consumers).

The above-mentioned stakeholder groups have been given the possibility to participate at the drafting process of this document.

The machinery concerned and the extent to which hazards, hazardous situations or hazardous events are covered are indicated in the Scope of this document.

When requirements of this type-C standard are different from those which are stated in type-A or type-B standards, the requirements of this type-C standard take precedence over the requirements of the other standards for machines that have been designed and built according to the requirements of this type-C standard.

# Earth-moving machinery — Functional safety —

## Part 5: Tables of performance levels

### 1 Scope

This document provides normative tables of machine performance levels required (MPL<sub>r</sub>) by common function and type for earth-moving machinery (EMM) as defined in ISO 6165. These MPL<sub>r</sub> can then be mapped or applied to safety control systems (SCS) used to control or that affect the functions defined in the table.

The MPL<sub>r</sub> in this document are determined through the machine control system safety analysis (MCSSA) process outlined in ISO 19014-1. A brief explanation of how the levels were derived and the associated assumptions are contained herein.

This document is not applicable to EMM manufactured before the date of its publication.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6165, *Earth-moving machinery — Basic types – Identification and terms and definitions*

ISO 12100:2010, *Safety of machinery — General principles for design — Risk assessment and risk reduction*

ISO 19014-1, *Earth-moving machinery — Functional safety — Part 1: Methodology to determine safety-related parts of the control system and performance requirements*

ISO 19014-2:2019, *Earth-moving machinery — Functional safety – Part 2: Design and evaluation of hardware and architecture requirements for safety-related parts of the control system*

ISO 19014-3, *Earth-moving machinery — Functional safety — Part 3: Environmental performance and test requirements of electronic and electrical components used in safety-related parts of the control system*

ISO 19014-4, *Earth-moving machinery — Functional safety — Part 4: Design and evaluation of software and data transmission for safety-related parts of the control system*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6165, ISO 12100, ISO 19014-1, ISO 19014-2, ISO 19014-3, ISO 19014-4 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

**3.1  
idle factor**

factor applied as part of determining the H variable (hazard time) to account for maximum or minimum idle time (100 % - max / min idle %)

EXAMPLE 1 Minimum idle time would be applied to loading a machine waiting for hauling machines during the loading cycle (idle factor = 10 %).

EXAMPLE 2 Maximum idle time would be applied to hazards associated with a stationary machine [*hold still* (3.2) function – idle factor = 50 %].

**3.2  
hold still**

function that keeps the wheels or crawler tracks stationary, preventing the machine from moving

EXAMPLE A SCS that would control the hold still function is a park brake.

**3.3  
slow/stop**

function which reduces or brings to zero the *machine speed* (3.4)

EXAMPLE A SCS that would control the slow/stop function is a service brake.

**3.4  
machine speed**

function which controls the rate of travel

EXAMPLE A SCS that would control the machine speed function is a throttle control, propel control or gear selection control.

**3.5  
engine speed**

function which controls the rotational speed of the engine

EXAMPLE A SCS that would control the engine speed function is a throttle control.

**3.6  
machine direction**

function which controls the longitudinal direction of the machine travel

EXAMPLE A SCS that would control the machine direction function is a forward/neutral/reverse selection control.

**3.7  
steering**

function which controls the lateral direction of machine travel

EXAMPLE A SCS that would control the steering function is a steering wheel or joystick.

**3.8  
swing/slew**

function which controls the clockwise or anti-clockwise rotation of the upper structure of an excavator or digging linkage

EXAMPLE A SCS that would control the swing/slew function is a joystick.

**3.9  
machine abuse**

activities that are outside the intended use of the machine and are beyond the reasonably foreseeable usage as communicated in the machine operation and service literature

EXAMPLE 1 Standing under a suspended load.

EXAMPLE 2 Using an earth-moving machine as an elevating work platform.

EXAMPLE 3 Intentionally driving machines in a way that would harm oneself or others.

EXAMPLE 4 Performing activities that are illegal.

Note 1 to entry: It is considered abuse to perform some maintenance tasks with the engine running or systems de-energized unless otherwise stated in the operator's manual.

### 3.10 roading

machines moving on a *road* (3.14)

Note 1 to entry: A suitably designed machine and road homologation can be required.

### 3.11 traveling

machine moving from one point on a worksite to another without going on a *road* (3.14)

EXAMPLE On a haul road, unimproved road or other thoroughfare on a site.

### 3.12 high wall

mine, quarry or other similar type wall associated with the worksite that a machine may be working near

Note 1 to entry: It is considered *machine abuse* (3.9) to operate machines near high walls without *berms* (3.13) in place.

### 3.13 berm

pile of dirt, rocks or other material intended to prevent a machine from passing into an area it is not intended to be operated in

Note 1 to entry: Some regions use different terms, e.g. bund, windrow.

### 3.14 road

public traffic area for use by automotive vehicles for travel or transportation

Note 1 to entry: Public traffic area does not include the sites of temporary road works (e.g. for repairs, maintenance, alteration, improvement, installation, or any other works to, above or under the road, including work to road equipment, lighting, barriers, walls etc) or roads not open to the public (e.g. on new housing and industrial developments), or on which public traffic is not permitted.

[SOURCE: ISO 17253:2014, 3.2]

### 3.15 work cycle

repeated process or task a machine performs within a use case

Note 1 to entry: Work cycles can be broken down into segments and steps (examples can be found in 5.4).

### 3.16 operator presence system

system fitted to a machine that detects if an operator is positioned in an operator station and automatically takes a control system action based on that determination

## 4 General

### 4.1 General principles

#### 4.1.1 Safety requirements

The  $MPL_r$  provided in this document may be used as an alternative to performing an MCSSA for like machinery per ISO 19014-1 and were derived using that process. The functions, applications and use cases used to determine these levels are based on generic limits of machine application for the machine type. If the  $MPL_r$  in this document are used, the  $MPL_r$  shall be in accordance with [Annexes A - AA](#) after following the review outlined in [4.1.2](#), [4.2](#), [4.3](#), [4.4](#), [4.5](#), and [4.6](#).

Machinery shall comply with the safety requirements and/or protective/risk reduction measures of ISO 19014-1, ISO 19014-2, and ISO 19014-4. In addition, the machine shall be designed according to the principles of ISO 12100:2010 for relevant but not significant hazards which are not dealt with by this document.

#### 4.1.2 Information for use

Limits of machine use, notable assumptions or examples of machine abuse considered in this document shall be communicated in the information for use according to ISO 19014-2:2019, Clause 8 and ISO 12100:2010, 6.4 and 6.4.5.

### 4.2 Mapping of functions to a SCS

The MCSSA supporting these  $MPL_r$  were carried out by function rather than system. In practice, there can be several SCS that could fail in a way that is described by the failure type listed for any particular function. All SCS on a machine shall be reviewed to determine if any failure could cause a hazardous outcome associated with a failure type of the functions listed. For example, a brake system may be mapped from a slow/stop or hold still function, as could another system that interferes with the ability of the machine to brake at an appropriate rate to meet the ISO 3450 stopping distance.

Measures beyond SCS may be applied to mitigate hazardous failures (e.g. mechanical lock outs, guards, administrative controls). In such a case, a MCSSA shall be completed to assess the  $MPL$  requirements of any residual risk associated with the SCS.

### 4.3 Applicability of the listed $MPL_r$ to machines

This document does not eliminate the need to do a risk assessment per ISO 12100 as defined in ISO 19014-1.

The MCSSA supporting these  $MPL_r$  were carried out considering the limits of the machine type usage across the industry. Unique or limited applications or use cases can result in a different  $MPL_r$  for the machine function. If a machine is specifically designed or modified for an application other than what is considered in the tables in this document, an MCSSA shall be performed to determine if any functions require a different  $MPL_r$ .

While every effort was made to perform the supporting MCSSA in a general sense, there can be times where the assessment does not match a specific machine design; this is particularly relevant to the selection of the controllability factors (AC, AR, AW). The supporting MCSSA assume a common operator control layout around the operator station and no common cause failures. If there is a common cause failure between the SCS mapped to the function being assessed and the MCS or SCS being used for controllability, the  $MPL_r$  in the table is not applicable (e.g. two systems sharing a control element or a control unit). Likewise, where the control used to activate the avoidance on a particular design does not align with the AR score in the table, the table is not applicable (e.g. a brake is assumed to be on the floor immediately next to a throttle/propel pedal, if the brake is controlled with a lever the AR score would change from an AR3 to an AR2, a size difference within a machine type that results in a change in severity). In this case, the designer shall perform a MCSSA according to ISO 19014-1 to consider these

facts. If the remaining data used in the assessment are applicable to the machine being assessed, the data can be used in that MCSSA and the non-applicable score changed. It is the responsibility of the machine designer to review and assess whether the scoring used in the MCSSA are applicable to their machine.

#### 4.4 Truncation

Due to the large number of combinations of inputs, the MCSSA supporting these tables are focused on scenarios that would clearly dominate the  $MPL_r$  (scenario that drives the highest  $MPL_r$  for the same function). Where a dominant scenario was not clearly identifiable, multiple scenarios were assessed to find the scenario(s) that led to highest  $MPL_r$ . Non-dominant scenarios were truncated from MCSSA. Part of the truncation process included equating scenarios to be the same, no worse, or less than scenarios already assessed; where this is the case, detail is not provided in the tables for the sake of legibility.

Only the scenarios that led to the highest  $MPL_r$  are included in the tables in the annexes unless a different failure type with a different hazardous outcome existed, in which case the scenarios with the highest  $MPL_r$  for all those failure types are included in the tables. Additional explanation in this space can be found in the function dominant failure type matrices. When more than one scenario of the same failure type led to the highest  $MPL_r$ , all such scenarios have been included.

#### 4.5 Effects of different technologies on MCSSA

In most cases, the  $MPL_r$  in this document apply regardless of the technology used in the SCS; however, there are times when this is not the case, e.g. mechanical drivetrains versus electric or hydrostatic drivetrains.

When considering an alternative SCS technology (e.g. electric or hydrostatic), the assessments in the tables in this document shall be reviewed. Any assumptions or assessments that are invalidated by the introduction of a different technology shall be reassessed according to 4.3. Additionally, the functionality of these systems can cause  $MPL_r$  to be mapped to different SCS.

NOTE Not all machines were assumed to have mechanical drivetrains; dozers, excavators, skid steer loaders and rollers were assumed to have a hydrostatic drivetrain.

The following are some situations where technology differences can affect  $MPL_r$ :

- there are changes in response to machine speed, propel, brake or direction commands (e.g. compared to mechanical drivetrains, some electric and hydrostatic drivetrains apply functions differently);
- retarders may not have been considered a safety function on a mechanical drive system but can possibly be the primary means of slowing the machine in an electric drive machine;
- controllability assessments may be different due to common components and other common cause failure considerations;
- there are additional safety functions associated with new hazards created by using a different energy type;
- engine speed can become decoupled from other systems (e.g. no longer has a direct effect on machine speed);
- there are changes in SCS performance due to system stored energy level (e.g. output performance varying due to battery charge).

#### 4.6 Supporting diagrams and data for the tables of machine performance levels

Scenarios that dominated the  $MPL_r$  score in the MCSSA are listed in the tables and a brief explanation are contained in the annexes. Where more detail is deemed necessary additional diagrams and information are provided in [Clause 5](#).

## 5 Additional MCSSA scenario information

### 5.1 Traffic rate on road


After reviewing the scenarios that earth-moving machines are used in, it was determined that the highest P value was bystanders in other vehicles when roading. The exposure of bystanders to an uncommanded steering event is largely dictated by the distance between vehicles. Machines cannot be designed to mitigate situations where illegal or unsafe actions are committed by other road users. The MCSSA considered traffic rates with 2 car lengths distance between cars as the norm (less distance between cars being commonly considered unsafe across the world).

While traffic can momentarily exceed this rate, the P value needs to account for the machine lifecycle. Traffic rates with less spacing would not occur continually over the entire machine lifecycle; this makes the traffic rate of 1 car every 3 car lengths conservative (see [Figure 1](#)).

NOTE This document refers to cars, light vehicles, and vehicles. Car is typically used in the context of a roading use case. Light vehicles is typically used in mining applications and weigh less than 3 500 kg. Vehicles is used generically.

### 5.2 Steering while roading

All failure types for steering create the same hazard, depending on whether the desired path is straight or curved (i.e. uncommanded steering on a straight road has the same hazardous outcome as failure to steer on a curved road) – the machine will leave the intended travel lane.

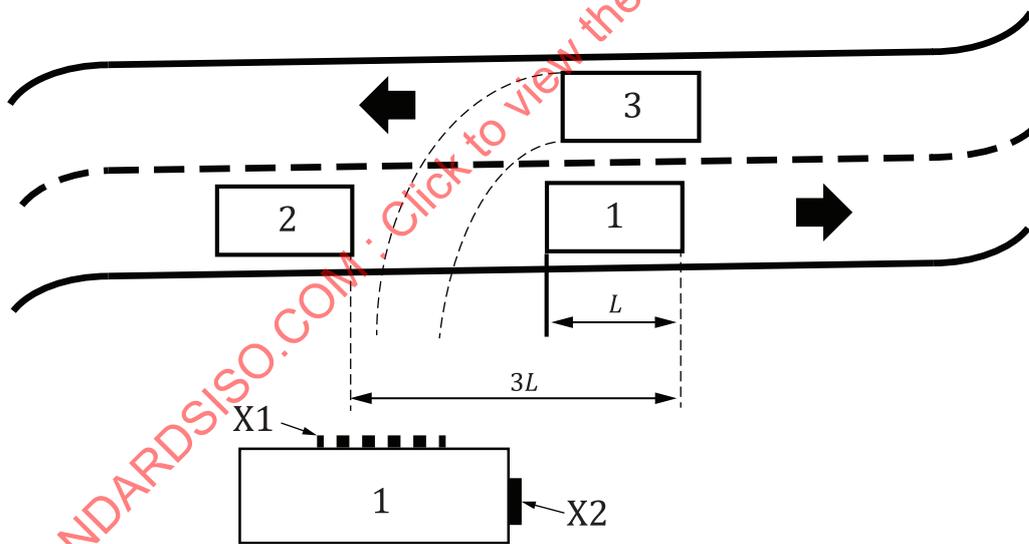

#### Key

- 1 vehicle 1
- 2 vehicle 2
- 3 machine
- X1 zone 1
- X2 zone 2
- L length

Figure 1 — Steering hazard zone for on road travel

Earth-moving machines can cause an S3 injury if there is contact between the machine and a vehicle. The proportion of the vehicle that results in an S3 injury is quantified below.

- The passenger cabin of the vehicle (i.e. machine contacts the side of the vehicle); this equates to approximately  $\frac{1}{2}$  the car length (see dotted line on vehicle in [Figure 1](#), X1).
- The front of the vehicle (i.e. the vehicle drove straight into the side of machine due to the machine steering in front of the vehicle); this equates to approximately  $\frac{1}{2}$  the width of the vehicle (see solid line on vehicle in [Figure 1](#), X2). Contact on the corners of the vehicle would be less likely to cause an S3 Injury.
- The ratio of length to width varies by vehicle; however, an estimation of an average ratio of 1:3,5 has been used.

When roading there is a risk of contacting a vehicle, a bystander or an object on the other side of the machine; this is less than the traffic rate. A P variable of 10 % has been used.

Based on these limiting factors the H and P variables for machines roading can be shown to be no higher than:

$$H_R P_R + H_L P_L = H_R P_R + H_L \left( T_R \left( \frac{L}{2} + \frac{W}{2} \right) \right) = (50 \% \times 10 \%) + \left( 50 \% \left( \frac{1}{3} \left( \frac{1}{2} + \frac{1}{7} \right) \right) \right) = 16 \%$$

where

$L =$  1 car length;

$H_R =$  H variable for right hand uncommanded steering = 50 % (if the machine steers without command, half the failures would steer the machine to the left, the other half to the right);

$P_R =$  P variable for the right-hand uncommanded steering = 10 %;

$H_L =$  H variable for left hand uncommanded steering = 50 %;


$P_L =$  P variable for the left-hand uncommanded steering;

$T_R =$  traffic rate per 5,1 =  $\frac{1}{3}$ ;

$W =$   $L/3,5$ .

### 5.3 Slow/stop and machine speed

The hazard zone for a brake failure is the area beyond the machine's normal stopping distance. An uncommanded increase in machine speed has a similar hazard zone (see [Figure 2](#)).

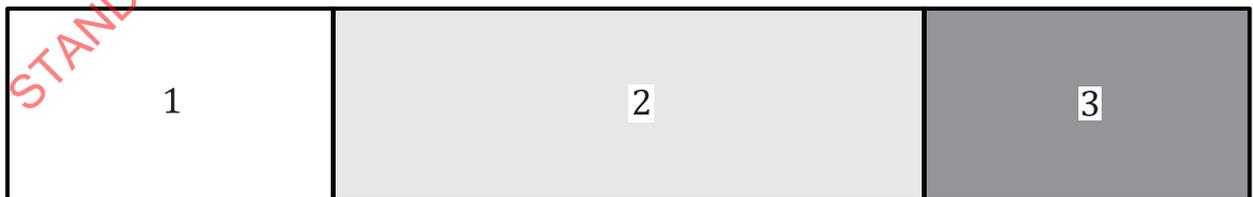

#### Key

- 1 machine
- 2 intended stopping distance
- 3 increased stopping distance

**Figure 2 — Slow/stop and machine speed hazard zone**

### 5.4 Work cycles

This section contains descriptions of common work cycles for the various machine types used in the MCSSA evaluations to determine  $MPL_r$ .

The values used in the percentage breakdown in [Tables 1](#) through [6](#) represent the worst credible scenario for the failure type being assessed as determined in the MCSSA.

[Figures 3](#) through [6](#) represent work cycles as considered in the MCSSA.

#### 5.4.1 Dumpers

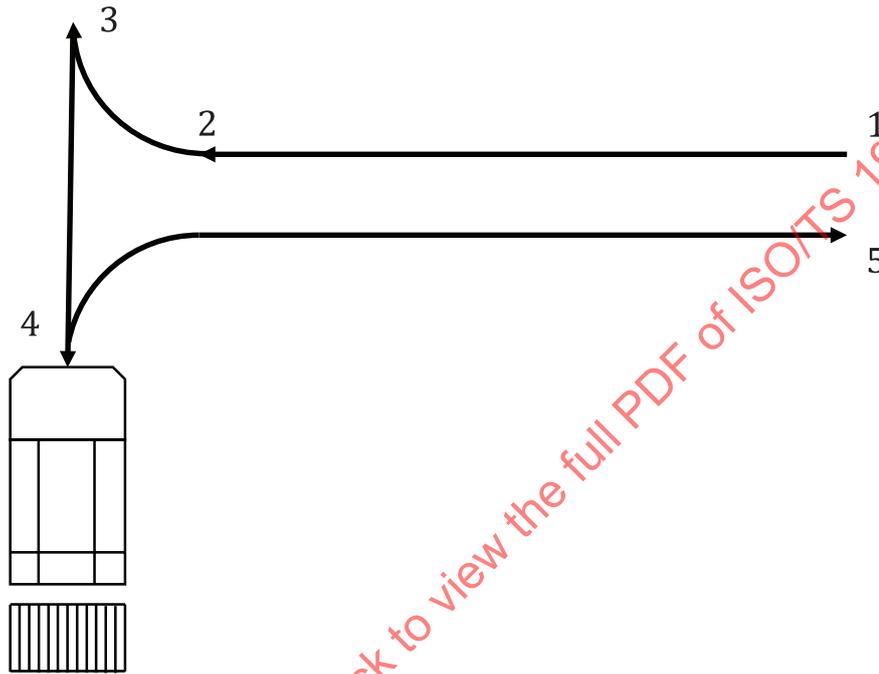


Figure 3 — Truck unloading and queuing cycle

Table 1 — Truck unloading and queuing cycle

Unloading and queuing - long cycle - see <a href="#">Figure 3</a>	
1 - 2 (slow forward speed, high traffic)	50 %
2 - 3 (slow forward speed, low traffic)	8 %
3 - 4 (slow reverse speed, low traffic)	17 %
Dump	17 %
4 - 5 (medium forward speed, high traffic)	8 %

#### 5.4.2 Excavators

Table 2 — Excavator object handling work cycle

Object handling cycle		
Step	Time [s]	% cycle
① lower/lash	45	21,3 %
② lift	30	14,2 %
③ swing	15	7,1 %
④ lower	60	28,4 %

Table 2 (continued)


Object handling cycle		
Step	Time [s]	% cycle
⑤ unlash	45	21,3 %
⑥ lift	4	1,9 %
⑦ swing	2	0,9 %
⑧ travel	10	4,7 %
total cycle time	211	100,0 %

Table 3 — Excavator trenching work cycle

Trenching use case	
dig (includes some lift)	35 %
swing CCW	25 %
dump	10 %
swing CW	25 %
travel	5 %

### 5.4.3 Wheel loaders

#### 5.4.3.1 Wheel loader bucket work

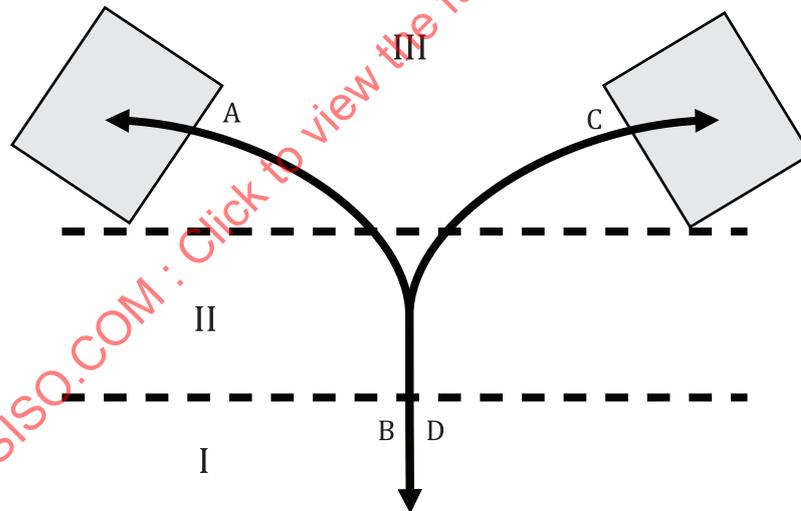

#### Key

A loading

C unloading

B/D travel during cycle

I zone with offsite traffic  $P = 50 \%$

II zone with site traffic  $P = 20 \%$

III zone where it is considered machine abuse, between machine and destination  $P = 0 \%$

Figure 4 — Wheel loader bucket work cycle

Table 4 — Wheel loader bucket work cycle

Wheel loader bucket work cycle - see Figure 4	
Segments A, C	30 %
Segments B, D	20 %

5.4.3.2 Wheel loader loading/unloading and lifting



Key

- A unloading
- C loading
- B/D travel during cycle
- I zone with more pedestrian traffic, less vehicular traffic P = 20 %
- II zone with more vehicular traffic, less pedestrian traffic P = 20 %

Figure 5 — Wheel loader work lifting and loading/unloading cycle

Table 5 — Wheel loader lifting and loading/unloading cycle

Lifting and loading/unloading use case - see Figure 5	
A1	6,25 %
A2	6,25 %
A3	6,25 %
A-Positioning	6,25 %
B	25 %
C1	6,25 %
C2	6,25 %
C3	6,25 %
C-Positioning	6,25 %
D	25 %

5.4.4 Skid steer loaders

Lifting, material handling, low to the ground and bucket work cycles look similar to the wheel loaders, however, instead of doing a 3-point turn, the machine rotates by counter steer.



Figure 6 — Skid steer loader lifting, loading/unloading, low to ground cycle diagram

Table 6 — Skid steer loader lifting, loading/unloading, low to ground cycle

Lifting, loading/unloading, low to ground use case	
1	1 %
2	1 %
3	48 %
4	1 %
5	1 %
6	48 %

## 5.5 Swing/slew of backhoe loaders and excavators


### 5.5.1 H variable for working beside traffic or co-workers

An excavator swing radius is a hazard zone and it is not intended for people, objects or traffic to be within the hazard zone. These MCSSA assume sufficient worksite hazard mitigations are in place (such as barriers and worksite rules).

Contact with an excavator tool during swing has three-dimensional zones in which the severity differs. Between the ground and 1 m from the ground, the worst credible injury is an S2. Between 1 m – 2 m from the ground, the worst credible injury is an S3. When the tool is within a trench, it is machine abuse to stand between the arm and the trench wall, however, a limb may momentarily be in this area and has been considered an S2. When the tool is on the ground or 2 m above, it is not considered a hazard.

When the motion of the lowest point of the tool is plotted over the object handling work cycle it can be determined which portions of the work cycle fall within the S2 and S3 zones. Both zones were analysed with the dominant score being shown in the scenarios contained in the tables in [Annexes D, E, and F](#).

A representation of this is shown in [Figure 7](#) and [Table 2](#).

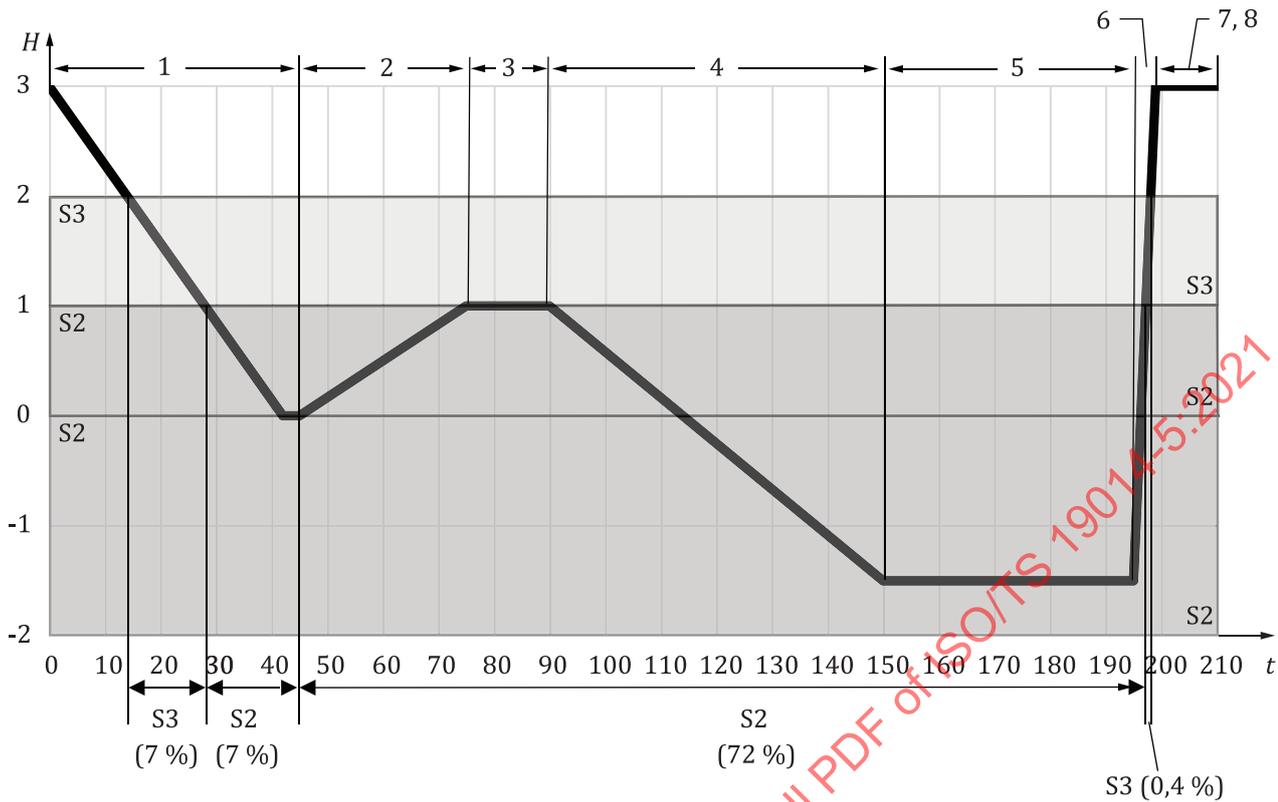

**Key**

*t* time in seconds

*H* height in meters

S2 zones in which an S2 severity could occur (0 m - 1 m above the ground or in the trench)

S3 zone in which an S3 severity could occur (1 m - 2 m above the ground)

**Figure 7 — Different severity score zones of the swing cycle (see cycle in Table 2)**

The result is the following H variables:

—  $H_{S2} = 79 \%$ ,

—  $H_{S3} = 7 \%$ .

**5.5.2 P values for swinging into traffic or co-workers**

The assumption of one vehicle every three vehicle lengths remains from 5.2. The proportion of the vehicle length that could result in an S3 injury is assumed to be 1/2 the vehicle length (combination of surfaces along the length and width of the vehicle where a person may be contacted by the machine tool - which is narrow compared to the exposed area)  $P = 1/2 \times 1/3 = 1/6$ .

A P value of 5 % has been added to one or both sides of machines to account for co-workers who momentarily pass into the swing radius of the machine to perform tasks that are necessary for the cycle (e.g. to check trench depth or attach / release a pipe from a chain). These co-workers are aware of hazard of swinging machines and would avoid being in the swing radius whenever possible. These values are then averaged across both sides of the machine because the machine can only swing in one direction at a time.

Where there is a co-worker on both sides of the machine  $P = [(1/6 + 5 \%) + 5 \%]/2 = 14 \%$ .

Where there only is a co-worker on one side of the machine  $P = (1/6 + 5 \%)/2 = 11 \%$ .

## 5.6 Maximum foreseeable P variables for typical areas on a site

Mine haul road – other machines: P = 10 %

Mine haul road – light vehicles and pedestrians: P = 5 %

Busy construction sites: P = 20 – 50 % depending on the task, applications and machine type

Scenarios where people should not be, however specific scenarios may rarely, however legitimately, require someone to be: P = 1 - 5 %

Scenarios where it is considered machine abuse, however it is foreseeable that there may be momentary incidental exposure: P = 1 – 2 %

Site park up area (e.g. area where shift changes, breaks, maintainers and activities that may cause machines to converge on at certain times): P = 25 – 50 % depending on machine type and applications

## 5.7 Seat belts

Earth-moving machines with seated operators are fitted with operator restraint systems—seat belts—and all MCSSA for such machines in this document were assumed that the operator was properly restrained. It is considered machine abuse to operate a machine fitted with a seat belt without wearing it.

## 5.8 Maintenance tasks

Only machine maintenance tasks that require or are reasonably foreseeable to be done with the engine running are considered in these assessments. The proportion of maintenance time is calculated based on the length of time the task takes and the frequency of those tasks. The H variable is calculated from the proportion of the time the maintainer would be exposed to the hazard while performing those tasks.

Depending on the size of the machine, maintenance tasks typically involve (70 – 75) % of the tasks on machine, with the rest of the time changing tools, performing job hazard analysis and other tasks. The P variables used reflect this.

## 5.9 Backhoe arm out and wheeled excavator or backhoe stabilizer down while travelling or roading

When travelling or roading, if a wheeled excavator or backhoe (centre mount only) stabilizer lowers without command, the stabilizer protrudes into the space beside the existing machine envelope. A similar situation occurs when a backhoe (side shift only) arm moves out without command; however, the arc of motion is up and out rather than down and out (see [Figure 8](#)). If traffic or pedestrians are in these spaces, they could be contacted by the machine.

It is not reasonable for people or traffic to be close to a moving machine (approximately 1 m). However, at the outer most portions of the range of motion, it is possible that people or traffic are present, such that they could be contacted.

For stabilizers and arm, the portion of the motion where someone could be present is approximately 20 %. For stabilizers, a P variable of 16 % (see [5.2](#)) for traffic has been used per [5.1](#). For arm, a P variable of 10 % is used (lower because of the height of the motion at this stage would only contact high vehicles) (see [Figure 8](#)).

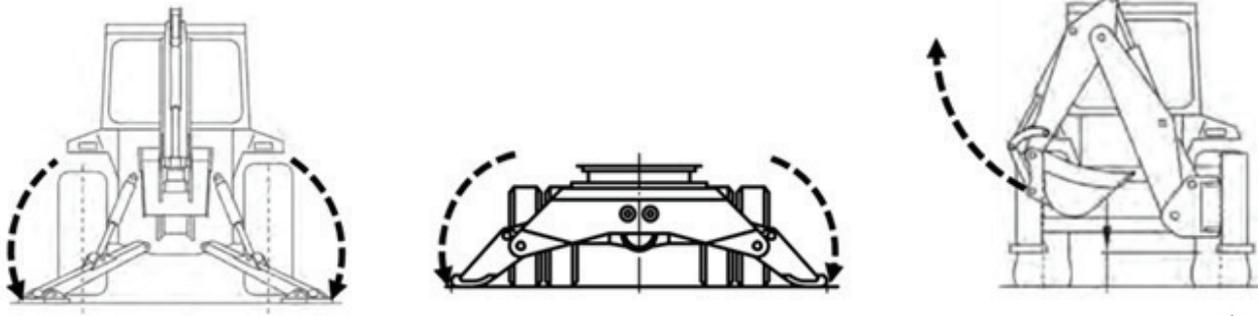


Figure 8 — Wheeled excavator, backhoe stabilizer down and backhoe arm out during travel H diagram

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex A (normative)

### Rigid frame dump trucks performance level tables

#### A.1 Rigid frame dump trucks

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables A.1](#) to [A.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table A.1 — MPL<sub>r</sub> table for rigid frame dump truck

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
RD1	<b>body up</b>	traveling	uncommanded activation	machine rolls due to body being stuck in the up position	operator	S1	80 %	100 %	100 %	E2	AC1	AW1	AR3	C2	<b>b</b>	
RD2		traveling	uncommanded activation	collision with rolled machine	bystander	S2	80 %	50 %	5 %	E1	AC1	AW1	AR3	C2		
RD3	<b>body down</b>	traveling	failure to apply on demand	machine rolls due to body being stuck in the up position	operator	S1	80 %	50 %	100 %	E2	AC1	AW2	AR3	C1	<b>a</b>	
RD4		traveling	failure to apply on demand	collision with rolled machine	bystander	S2	80 %	25 %	5 %	E1	AC1	AW2	AR3	C1		
RD5	<b>neutralize</b>	unloading and queuing	uncommanded deactivation	machine moves into machine in front / behind or over high wall / steep slope	operator	S3	20 %	9 %	100 %	E1	AC1	AW2	AR3	C1	<b>b</b>	
RD6	<b>machine speed</b>	traveling	uncommanded activation	runaway machine - machine goes off high wall	operator	S3	90 %	55 %	100 %	E2	AC1	AW3	AR3	C0	<b>b</b>	
BAD2	<b>machine direction</b>	considered to be the same unloading and queuing for articulated-frame dumpers greater than 22 000 kg														<b>c</b>

<sup>a</sup> For pressure vessel discharge and isolation systems, uncommanded activation of the systems has the same MPL<sub>r</sub> as the system they are controlling.

<sup>b</sup> For a steering hydraulic system that automatically discharges stored energy when the machine is powered off, the controllability for failure on demand would be AC0 due to the hazard of someone moving the steering when they think the system is discharged. In this case the MPL<sub>r</sub> would be c.

Table A.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
RD7		traveling	failure to apply on demand	runaway machine - machine goes off high wall or a collision	operator	S3	90 %	28 %	100 %	E2	AC1	AW2	AR2	C2	d
RD8	<b>slow/stop</b>	traveling	uncommanded activation	machine goes into uncontrollable skid - goes off high wall or head to tail collision	operator	S3	90 %	4 %	100 %	E1	AC1	AW2	AR2	C2	c
RD9	<b>hold still</b>	slow speed maneuvering	failure to apply on demand	machine rolls away - collision with light vehicle or pedestrian - operator out of cab	bystander	S3	20 %	10 %	25 %	E0	AC0	N/A	N/A	C3	c
RD10		maintenance	failure to apply on demand	maintainer run over	maintainer	S3	7 %	13 %	100 %	E0	AC0	N/A	N/A	C3	
RD11	<b>steering</b>	traveling	uncommanded activation	machine steers off high wall	operator	S3	90 %	90 %	100 %	E2	AC1	AW2	AR2	C2	d
RD12		traveling	uncommanded activation	collision with light vehicle or pedestrian	bystander	S3	90 %	100 %	5 %	E1	AC1	AW2	AR0	C3	
RD13	<b>powered access</b>	slow speed maneuvering	uncommanded activation	access system lowers onto person	bystander	S2	20 %	100 %	25 %	E1	AC1	AW0	AR1	C3	c

<sup>a</sup> For pressure vessel discharge and isolation systems, uncommanded activation of the systems has the same MPL<sub>r</sub> as the system they are controlling.

<sup>b</sup> For a steering hydraulic system that automatically discharges stored energy when the machine is powered off, the controllability for failure-on demand would be AC0 due to the hazard of someone moving the steering when they think the system is discharged. In this case the MPL<sub>r</sub> would be c.



## A.2 Supporting explanation

### A.2.1 Supporting explanations for dominant scenarios

#### RD1 – body up

H: Hazard exists for the entire cycle.  $H = 100\%$

P: Operator is always in cab for this use case.  $P = 100\%$

AC: AC1 – Remove foot from throttle to reduce raise rate, brake to stop moving

AW: AW1 – Only if looking in mirror or body down indicator (if fitted)

AR: AR3 – Removing foot from throttle is a natural reaction

#### RD2 – body up

H: Hazard only exists if machine rolls in one direction – 50 % of hazards are dangerous.  $H = 50\%$

P: Light vehicle on haul road traffic rate.  $P = 5\%$

AC: AC1 – Remove foot from throttle to reduce raise rate, brake to stop moving

AW: AW1 – Only if looking in mirror or body down indicator (if fitted)

AR: AR3 – Removing foot from throttle is a natural reaction

#### RD3 – body down

H: Worst case when downhill hauling – 50 % of hazards are dangerous.  $H = 50\%$

P: Operator is always in cab for this use case.  $P = 100\%$

AC: AC1 – brakes

AW: AW2 – Operator should be watching body lower and machine feel will be different

AR: AR3 – Operator can choose not to start moving

#### RD4 – body down

H: Worst case when downhill hauling (50 %), hazard only exists if machine rolls in one direction (50 %).  $H = 50\% \times 50\% = 25\%$

P: Light vehicle traffic rate.  $P = 5\%$

AC: AC1 – Remove foot from throttle to reduce raise rate, brake to stop moving

AW: AW2 – Operator should be watching body lower and machine feel will be different

AR: AR3 – Operator can choose not to start moving

#### RD5 – neutralize

H: Only hazardous when dumping (queue would be at low idle and operator would have brake applied) see [Table 1](#) and [Figure 3](#) (17 %). 50 % failures are hazardous – moves into reverse only.  $H = 50\% \times 17\% = 9\%$

P: Operator always in cab for this use case.  $P = 100\%$

AC: AC1 – Operator should have foot on brake or have park brake applied

AW: AW2 – Operator should be watching body lower and machine feel will be different

AR: AR3 – Operator should have foot on brake or have park brake applied

RD6 – machine speed

H: When going downhill (45 %) or trying to stop (10 %).  $H = 45 \% + 10 \% = 55 \%$

P: Operator is always in cab for this use case.  $P = 100 \%$

AC: AC1 – brakes

AW: AW3 – Not immediately hazardous – hazard increases in time

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

RD7 – slow/stop

H: When going downhill (45 %) on a curve (40 %) or trying to stop (10 %) ( $(45 \% \times 40 \%) + 10 \%$  stopping).  $H = 28 \%$

P: Operator is always in cab for this use case.  $P = 100 \%$

AC: AC1 – park brakes

AW: AW2

AR: AR2 – Applying park brake required (by moving their hand)

RD8 – slow/stop

H: Hazardous when on curve (40 %), downhill (45 %), high wall present (90 %), conditions conducive to a skid (25 %).  $H = 40 \% \times 45 \% \times 90 \% \times 25 \% = 4 \%$

P: Operator is always in cab for this use case.  $P = 100 \%$

AC: AC1 – berm

AW: AW2

AR: AR2 – Berms are not always effective

RD9 – hold still

H: Amount of time machine could be left unattended not in V ditch or specifically designed parking area designed to prevent roll away (10 %).  $H = 10 \%$

P: Typical bystander rate in central / parking areas.  $P = 25 \%$

AC: AC0

RD10 – hold still

H: 10 % of refuel (58,6 %), 20 % of daily walk around (19,5 %), 10 % of window wash (only when on the ground - lesser severity on platform) (9,8 %), 0 % of brake test (4,9 %), 100 % troubleshooting (1 %), 25 % of camera wash (some lower severity) (4,9 %), 10 % of tyre inspection (1,4 %).  $H = (10 \% \times 58,6 \%) + (20 \% \times 19,5 \%) + (10 \% \times 9,8 \%) + (0 \% \times 4,9 \%) + (100 \% \times 1 \%) + (25 \% \times 4,9 \%) + (10 \% \times 1,4 \%) = 13 \%$

P: Maintainer can be dedicated to these tasks for fleet of machines, P is considered H calculation.  $P = 100 \%$

AC: AC0

RD11 – steering

H: Hazardous when high wall present (90 %). H = 90 %

P: Operator is always in cab for this use case. P = 100 %

AC: AC1 – berm

AW: AW2

AR: AR2 – Berms are not always effective

RD12 – steering

H: Hazard exists during the whole cycle. H = 100 %

P: Typical haul road light vehicle rate. P = 5 %

AC: AC1 – brakes

AW: AW2

AR: AR0

RD13 – powered access system

H: Hazard exists during the whole cycle. H = 100 %

P: Typical bystander rate in central / parking areas. P = 25 %

AC: AC1 – brakes (stop machine before it hits someone)

AW: AW0

AR: AR1

RD14 – pressure vessel discharge

H: Only maintenance tasks within the system that could be charged. H = 10 %

P: Maintenance task on / off machine split. P = 75 %

AC: AC1 – It is considered machine abuse to perform tasks where pressure could be released from a pressurized system without first checking to ensure that the energy is discharged.

AW: AW3 – Checks are performed before work commences and the hazard presents itself.

AR: AR1 – Maintainer required to move hands and feet to perform this task.

RD15 – isolation system

H: Only maintenance tasks within the system that could be charged. H = 10 %

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

**A.2.2 Application use cases**

**Table A.2 — Application use case table**

Application	Traveling	Loading and queuing	Unloading and queuing	Slow speed maneuvering	Maintenance
Less than 100 000 kg rigid trucks	80 %	40 %	20 %	30 %	7 %

Table A.2 (continued)

Application	Traveling	Loading and queuing	Unloading and queuing	Slow speed maneuvering	Maintenance
Greater than or equal to 100 000 kg payload large trucks	90 %	40 %	20 %	20 %	7 %

A.2.3 Maintenance task breakdown

Table A.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
refuel	60	59
walk around, oil check	20	20
wash mirror and windows	10	10
brake test	5	5
troubleshooting		1
clean camera	5	5
tire maintenance	1,4	1

A.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table A.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to re-lease on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine speed			1		Failure to release on demand is considered the same as uncommanded activation. Other failure types are less severe.
machine direction	1				Failure to apply is treated as a failure to change direction or changing into wrong direction. An uncommanded direction change is considered the same as uncommanded park brake.
transmission neutralize				1	Shifting out of N without command
machine start			1		Uncommanded shutdown is considered the same as uncommanded hold still or stop or N depending on machine design. Uncommanded activation is only dangerous when in maintenance and the machine is keyed on.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

Table A.4 (continued)

Function	Failure to apply on demand	Failure to re-lease on demand	Uncom-manded activation	Uncom-manded deactivation	Notes
body up			1		Other failure types are less or not hazardous.
body down	1		1		Failure to lower the body is less dangerous than the body lowering without command, but is still assessed.
ejector out			1		Other failure types not hazardous
ejector in					Only dangerous when in maintenance and machine is running, however it is machine abuse to be behind ejector plate when the machine is running.
slow/stop	1		1		Other failure types have the same outcome as what is being analyzed.
hold still	1				Failure to apply on demand considered the same as uncommanded release. Uncommanded activation considered the same as uncommanded slow/stop.
pressure vessel discharge	1				Uncommanded discharge is covered under system integrity of the system the pressure vessel is installed in.
steering			1		Failure to apply on demand is considered the same as uncommanded activation.
isolation system	1				Uncommanded activation is the same as uncommanded slow/stop. Uncommanded release is the same as failure to apply on demand.
powered access			1		Other failure types are less or not hazardous.
NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.					

### A.2.5 Notes and assumptions

- Due to sites with machines this size typically having controlled access, the following assumptions were made:
  - co-workers were people in other similar sized machines,
  - bystanders were co-workers in light vehicles and pedestrians.
- This assessment only considers trucks used as dump trucks and derivatives to the extent that they have common usage and features to the dump trucks considered in the MCSSA.
- Some data suggested that loading/queuing and unloading/queuing values could be higher than those used in this analysis, however it was determined that this was highly inefficient and would not be a sustainable business practice in the long term and would thus not be an accurate representation of machine usage.
- Consistent scoring guidelines:
  - S1 collision with another similar size or larger machine except for rear end collisions between 2 trucks of similar size (operator and co-worker),
  - S3 rear end collision between 2 trucks of similar size - rigid trucks only (operator and co-worker),
  - S3 machine off high wall (operator),

- S3 machine versus pedestrian or light vehicle (bystander),
- S1 rear end collision between 2 trucks of similar size - articulated trucks only (operator and co-worker),
- S1 roll over (operator).

### A.3 MPL<sub>r</sub> mapped to SCS table

Table A.5 shows function-based MPL<sub>r</sub> (see Table A.1) mapped to SCS per the results of the MCSSA for a rigid frame dump truck. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table A.1 would also be mapped to these MPL<sub>r</sub>.

Table A.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
body up	uncommanded activation	<b>b</b>	hoist raise
	failure to release on demand		
body down	failure to apply on demand	<b>a</b>	hoist lower
neutralize	uncommanded deactivation	<b>b</b>	gear direction control
machine speed	uncommanded activation	<b>b</b>	throttle and speed gear control
machine direction	failure to apply on demand	<b>c</b>	gear direction control
slow down / stop	failure to apply on demand	<b>d</b>	service brakes
	uncommanded activation	<b>c</b>	
hold still	failure to apply on demand	<b>c</b>	parking brakes
steering	uncommanded activation	<b>d</b>	steering
powered access	uncommanded activation	<b>c</b>	powered access ladder
pressure vessel discharge <sup>a</sup>	failure to apply on demand	<b>b</b>	accumulator charge system
isolation system	failure to apply on demand	<b>c</b>	machine lockout system

<sup>a</sup> For pressure vessel discharge and isolation systems, uncommanded activation of the systems has the same MPL<sub>r</sub> as the system they are controlling.

## Annex B (normative)

### Articulated-frame dumpers equal to or greater than 22 000 kg performance level tables

#### B.1 Articulated-frame dumpers equal to or greater than 22 000 kg

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables B.1](#) to [B.4](#)) or in [Clause 5](#).

Table B.1 — MPL<sub>r</sub> table for articulated-frame dumpers equal to or greater than 22 000 kg

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
LAD1	body up															b
LAD2	body down															a
BAD1	ejector out	traveling	uncommanded activation	hit ejected material - could tip	co-worker	S1	80 %	50 %	10 %	E1	AC0	N/A	N/A	C3		b
RD5	neutralize															b
LAD3																
RD6	machine speed															b
BAD2	machine direction	unloading and queuing	failure to apply on demand	machine reverses over high wall of steep slope	operator	S3	40 %	2 %	100 %	E0	AC1	AW2	AR0	C3		c
BAD3	slow/stop	traveling	failure to apply on demand	runaway machine - machine goes off high wall. <sup>a</sup>	operator	S3	80 %	6 %	100 %	E1	AC1	AW2	AR2	C2		c
BAD4		traveling	uncommanded activation	uncontrollable skid - machine collision with light vehicle	bystander	S3	80 %	2 %	5 %	E0	AC0	N/A	N/A	C3		c
RD10	hold still															c
LAD8-9																
BAD5	steering	traveling	uncommanded activation	machine steers off high wall	operator	S3	80 %	30 %	100 %	E2	AC1	AW2	AR2	C2		d
BAD6		traveling	uncommanded activation	collision with light vehicle or pedestrian	bystander	S3	80 %	100 %	5 %	E1	AC1	AW2	AR0	C3		d
<sup>a</sup> The severity of head to tail collision for articulated trucks is lower than rigid frame trucks due to geometry.																

## B.2 Supporting explanation

### B.2.1 Supporting explanations for dominant scenarios

#### BAD1 – ejector out

H: Only hazardous while loaded. H = 50 %

P: Typical haul road machine rate. P = 10 %

AC: AC0

#### BAD2 – machine direction

H: Only hazardous at the precise moment when the operator goes to drive away from the dump point. H = 2 %

P: Operator is always in cab for this use case. P = 100 %

AC: AC1 – brakes

AW: AW2

AR: AR0

#### BAD3 – slow/stop

H: Only hazardous when going downhill (15 %) and on a curve (40 %). H = 6 %

P: Operator is always in cab for this use case. P = 100 %

AC: AC1 – park brake

AW: AW2

AR: AR2

#### BAD4 – slow/stop

H: Only hazardous when on curve (40 %), going downhill (15 %), 25 % conditions conducive to a skid (25 % - high wall and downhill reduced to 1/3rd of large rigid trucks). H = (40 % × 15 % × 25 %) = 2 %

P: Light vehicle on haul road traffic rate. P = 5 %

AC: AC0

#### BAD5 – steering

H: Only hazardous when high wall is present. H = 30 %

P: Operator is always in cab for this use case. P = 100 %

AC: AC1 – park brake

AW: AW2

AR: AR2

#### BAD6 – steering

H: Hazard exists for the whole cycle. H = 100 %

P: Light vehicle on haul road traffic rate. P = 5 %

AC: AC1 – brake

AW: AW2

AR: AR2

**B.2.2 Application use cases**

**Table B.2 — Application use case table**

Application	Traveling	Loading and queuing	Unloading and queuing	Slow speed maneuvering	Maintenance
22 000 kg and greater payload articulated-frame dumpers	80 %	30 %	40 %	30 %	5 %

**B.2.3 Maintenance task breakdown**

**Table B.3 — Maintenance task breakdown**

	Time (min/day)	% Maintenance time
refuel	10	17
walk around, grease and oil check	20	33
wash machine	5	8
wash mirror and windows	10	17
brake test	5	8
troubleshooting		1
install body-lock pins	1,7	3
install articulation lock	1,7	3
clean camera	5	8
tire maintenance	1,7	3

**B.2.4 Function dominant failure type matrix**

See [Table A.4](#).

**B.2.5 Notes and assumptions**

See [A.2.5](#).

**B.3 MPL<sub>r</sub> mapped to SCS table**

[Table B.4](#) shows function-based MPL<sub>r</sub> (see [Table B.1](#)) mapped to SCS per the results of the MCSSA for a 22 000 kg and greater payload articulated-frame dumper. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in [B.1](#) would also be mapped to these MPL<sub>r</sub>.

**Table B.4 — MPL<sub>r</sub> mapped to SCS**

Machine function	Failure type	MPL required	Example of mapped system
body up	uncommanded activation	<b>b</b>	hoist raise
body down	failure to apply on demand	<b>a</b>	hoist lower
ejector out	uncommanded activation	<b>b</b>	ejector
neutralize	uncommanded deactivation	<b>b</b>	gear direction control

Table B.4 (continued)

Machine function	Failure type	MPL re-quired	Example of mapped system
machine speed	uncommanded activation	<b>b</b>	throttle and speed gear control
machine direction	failure to apply on demand	<b>c</b>	gear direction control
slow down / stop	failure to apply on demand	<b>c</b>	service brakes
	uncommanded activation	<b>c</b>	
hold still	failure to apply on demand	<b>c</b>	parking brakes
steering	uncommanded activation	<b>d</b>	steering

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

**Annex C**  
(normative)

**Articulated-frame dumpers equal to or less than 22 000 kg  
performance level tables**

**C.1 Articulated-frame dumpers less than 22 000 kg**

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables C.1](#) to [C.3](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table C.1 — MPL<sub>r</sub> table for articulated-frame dumpers less than 22 000 kg

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
LAD1	body up	roading	uncommanded activation	machine rolls due to body being stuck in the up position	operator	S1	80 %	100 %	100 %	E2	AC1	AW1	AR3	C2	b
LAD2	body down	roading	failure to apply on demand	machine rolls due to body being stuck in the up position	operator	S1	80 %	50 %	100 %	E2	AC1	AW2	AR3	C1	a
RD5				considered to be the same rigid dump trucks											
LAD3	neutralize	slow speed maneuvering	uncommanded deactivation	collision with light vehicle or pedestrian due to unexpected machine movement	bystander	S3	30 %	20 %	25 %	E1	AC1	AW2	AR3	C1	b
LAD4	machine speed	roading	uncommanded activation	runaway machine - machine collision with light vehicle	bystander	S1	80 %	55 %	5 %	E1	AC1	AW3	AR3	C0	a
LAD5	machine direction	slow speed maneuvering	failure to apply on demand	collision with light vehicle or pedestrian	bystander	S3	30 %	10 %	25 %	E0	AC1	AW2	AR3	C1	a
LAD6		roading	failure to apply on demand	runaway machine - run over bystander <sup>a</sup>	bystander	S3	80 %	1 %	100 %	E0	AC1	AW2	AR2	C2	b
LAD7	slow/stop	roading	uncommanded activation	uncontrollable skid - machine collision with light vehicle	bystander	S3	80 %	2 %	5 %	E0	E0-AC0	N/A	N/A	C3	c

<sup>a</sup> Rear end collision with light vehicle is considered less severe than larger machines.

Table C.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
RD10				considered to be the same rigid dump trucks											
LAD8	hold still	slow speed maneuvering	failure to apply on demand	machine rolls away - collision with light vehicle or pedestrian operator out of cab	bystander	S3	30 %	10 %	10 %	E0	AC0	N/A	N/A	C3	c
LAD9		maintenance	failure to apply on demand	maintainer run over	maintainer	S3	5 %	15 %	7 %	E0	AC0	N/A	N/A	C3	
LAD10	steering	roading	uncommanded activation	collision with light vehicle, pedestrian	bystander	S3	80 %	10 %	16 %	E1	AC1	AW2	AR0	C3	d

<sup>a</sup> Rear end collision with light vehicle is considered less severe than larger machines.

STANDARDS ISO 9001 Click to view the full PDF of ISO/TS 19014-5:2021

## C.2 Supporting explanation

### C.2.1 Supporting explanations for dominant scenarios

#### LAD1 – body up

H: Hazard exists for the entire cycle. H = 100 %

P: Operator is always in cab for this use case. P = 100 %

AC: AC1 – Remove foot from throttle to reduce raise rate, brake to stop moving

AW: AW1 – Only if looking in mirror or body down indicator (if fitted)

AR: AR3 – Removing foot from throttle is a natural reaction

#### LAD2 – body down

H: Worst case when downhill hauling – 50 % of hazards are dangerous. H = 50 %

P: Operator is always in cab for this use case. P = 100 %

AC: AC1 – brakes

AW: AW2 – Operator should be watching body lower and machine feel will be different

AR: AR3 – Operator can choose not to start moving

#### LAD3 – neutralize

H: Time when machine is idle while waiting. H = 20 %

P: Typical bystander rate in central/parking areas. P = 25 %

AC: AC1 – brakes

AW: AW2 – Operator should be watching body lower and machine feel will be different

AR: AR3 – Operator can brake as soon as movement is felt

#### LAD4 – machine speed

H: When going downhill (45 %) or trying to stop (10 %). H = 45 % + 10 % = 55 %

P: Light vehicle on haul road traffic rate. P = 5 %

AC: AC1 – brakes

AW: AW3 – Not immediately hazardous – hazard increases in time

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

#### LAD5 – machine direction

H: Only hazardous when machine is changing direction (10 %). H = 10 %

P: Typical bystander rate in central/parking areas. P = 25 %

AC: AC1 – brakes

AW: AW2

AR: AR3

LAD6 – slow/stop

H: Only hazardous when roading and stopping to avoid pedestrian (1 %). H = 1 %

P: Pedestrian always present when stopping to avoid pedestrian. P = 100 %

AC: AC1

AW: AW2

AR: AR2 – park brake

LAD7 – slow/stop

H: Only hazardous when slick underfoot conditions (25 %), curve present (40 %), downhill (15 %).  
 $H = 25 \% \times 40 \% \times 25 \% = 2 \%$

P: Light vehicle on haul road traffic rate. P = 5 %

AC: AC0

LAD8 – hold still

H: Amount of time machine could be left unattended not in V ditch or specifically designed parking area designed to prevent roll away (10 %). H = 10 %

P: Only hazardous at this severity for pedestrians in area. P = 10 %

AC: AC0

LAD9 – hold still

H: 0 % of refuel (16,5 %), 10 % of daily walk around (33 %), 10 % of machine wash (8,25 %), 20 % of window wash (should 3 points of contact) (16,5 %), 0 % of brake test (8,5 %), 100 % troubleshooting (1 %), 50 % of body pin install (2,75 %), 100 % of articulation lock install (2,75 %) 25 % of camera wash (some lower severity) (8,25 %), 10 % of tyre inspection (2,75 %)

P: P: Typical P for maintenance tasks – 70 % of task on machine, 30 % of task off machine (changing / obtaining tools, preparation, cleaning etc.). P = 70 %

AC: AC0

LAD10 – steering

H: Not used as haul unit on the road (highway trucks are used then - more efficient), only used on road for relocation between sites. H=10 %

P: See 5.2. P = 16 %

AC: AC1 – brake

AW: AW2

AR: AR0

## C.2.2 Application use cases

Table C.2 — Application use case table

Application	Roading	Loading and queuing	Unloading and queuing	Slow speed maneuvering	Maintenance
Less than 22 000 kg payload - articulated-frame dumpers	80 %	30 %	20 %	30 %	5 %

## C.2.3 Maintenance task breakdown

See [Table B.3](#).

## C.2.4 Function dominant failure type matrix

See [Table A.4](#).

## C.2.5 Notes and assumptions

See [A.3](#).

## C.3 MPL<sub>r</sub> mapped to SCS table

[Table C.3](#) shows function-based MPL<sub>r</sub> (see [Table C.1](#)) mapped to SCS per the results of the MCSSA for a less than 22 000 kg payload articulated-frame dumper. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in [Table C.1](#) would also be mapped to these MPL<sub>r</sub>.

Table C.3 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL required	Example of mapped system
body up	uncommanded activation	<b>b</b>	hoist raise
body down	failure to apply on demand	<b>a</b>	hoist lower
neutralize	uncommanded deactivation	<b>b</b>	gear direction control
machine speed	uncommanded activation	<b>a</b>	throttle and speed gear control
machine direction	failure to apply on demand	<b>a</b>	gear direction control
slow down / stop	failure to apply on demand	<b>b</b>	service brakes
	uncommanded activation	<b>c</b>	
hold still	failure to apply on demand	<b>c</b>	parking brakes
steering	uncommanded activation	<b>d</b>	steering

## Annex D (normative)

### Crawler excavators less than 109 000 kg performance level tables

#### D.1 Crawler excavators less than 109 000 kg

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables D.1 to D.5](#)) or in [Clause 5](#).

This  $MPL_r$  table shall be used in conjunction with [5.4](#). If the assumptions in [5.5](#) do not apply, then an MCSSA shall be performed.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table D.1 — MPL<sub>r</sub> table for crawler excavators less than 109 000 kg

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CH1		object handling	failure to release on demand	slow speed swing into traffic - co-worker	co-worker	S3	80 %	4 %	5 %	E0	AC1	AW2	AR0	C3	
CH2		object handling	failure to release on demand	slow speed swing into traffic - collision	bystander	S3	80 %	4 %	14 %	E0	AC1	AW2	AR0	C3	
CH3		object handling	uncommanded activation	slow speed swing into traffic - collision	operator	S1	80 %	40 %	100 %	E2	AC1	AW2	AR0	C3	
CH4		travel	failure to release on demand	rotation of machine instead of stopping - collision	co-worker	S3	20 %	5 %	5 %	E0	AC1	AW2	AR0	C3	
CH5		travel	failure to release on demand	rotation of machine instead of stopping - collision	bystander	S3	20 %	5 %	5 %	E0	AC1	AW2	AR0	C3	
CH6	acceleration / machine speed / direction	transport	failure to release on demand	machine rotates off truck and can tip (mini HEX could be carried on higher trucks)	operator	S2	5 %	100 %	100 %	E1	AC1	AW2	AR0	C3	c

Table D.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CH7		transport	failure to release on demand	machine rotates off truck and can tip on person (mini HEX could be carried on higher trucks)	co-worker	S3	5 %	100 %	5 %	E0	AC1	AW2	AR0	C3	
CH8		trenching	uncommanded activation	collision with pedestrian or car	co-worker	S3	70 %	9 %	14 %	E0	AC1	AW2	AR0	C3	
CH9		trenching	uncommanded activation	collision with pedestrian or car	bystander	S2	70 %	14 %	14 %	E1	AC1	AW2	AR0	C3	
CH10		object handling	uncommanded activation	slow speed swing into traffic - co-worker	co-worker	S3	80 %	5 %	11 %	E0	AC1	AW2	AR0	C3	
CH11		object handling	uncommanded activation	slow speed swing into traffic - collision	bystander	S2	80 %	40 %	10 %	E1	AC1	AW2	AR0	C3	
CH12	track width extension	object handling	uncommanded deactivation	machine tips - no significant injury for this size machine	operator	S0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	QM

Table D.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
CH13	boom up	object handling	uncommanded activation	injury to fingers if in the process of lashing or unlashng	co-worker	S2	80 %	34 %	10 %	E1	AC0	N/A	N/A	C3	c	
travel																uncommanded activation
CH13		Considered to be the same as arm in														
CH16	boom down	object handling	uncommanded activation	crushed by boom, object on ground for parts of cycle that are hazardous	co-worker	S3	80 %	19 %	2 %	E0	AC0	N/A	N/A	C3	c	
CH21-28	boom swing (L / R)	considered to be the same as upper structure slew / swing														
CH21-28	boom offset	considered to be the same as upper structure slew / swing														
CH13	arm in	object handling	uncommanded activation	co-worker hit by object	co-worker	S3	80 %	5 %	5 %	E0	AC0	N/A	N/A	C3	c	
CH17		maintenance	uncommanded activation	crushed by boom	maintainer	S3	5 %	8 %	70 %	E0	AC0	N/A	N/A	C3		
CH13	arm out	considered to be the same as arm in														
CH13	telescopic arm	considered to be the same as arm in														
CH13	bucket dump	considered to be the same as arm in														
CH13	bucket curl	considered to be the same as arm in														

Table D.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CH18	auxiliary flow	object handling	uncommanded activation	grabbing bucket / clamshell bucket opens dropping load.	co-worker	S2	80 %	26 %	5 %	E1	AC0	N/A	N/A	C3	c
WE23	implement rotate	considered to be the same as wheeled excavator													
CH13	blade up	considered to be the same as arm in													
CH19	blade down / float / tilt / angle	travel	uncommanded activation	blade lowers suddenly causing machine to abrupt stop - no significant injury for this type of machine due to low speed	operator	S0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	QM
CH20	coupler engagement	trenching	uncommanded deactivation	bucket thrown from machine	co-worker	S3	70 %	1 %	1 %	E0	AC0	N/A	N/A	C3	c
CH13	considered to be the same as arm in														
CH21		travel	uncommanded activation	machine swings / slews into co-worker	co-worker	S3	20 %	50 %	5 %	E0	AC1	AW2	AR0	C3	
CH22		travel	uncommanded activation	machine swings / slews into bystander	bystander	S3	20 %	50 %	5 %	E0	AC1	AW2	AR0	C3	
CH23		trenching	failure to release on demand	collision with pedestrian or car	co-worker	S3	70 %	6 %	5 %	E0	AC1	AW2	AR0	C3	

Table D.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CH24	upper structure swing/slew	trenching	failure to release on demand	collision with pedestrian or car	bystander	S2	70 %	11 %	14 %	E1	AC1	AW2	AR0	C3	c
CH25		trenching	uncommanded activation	collision with pedestrian or car	co-worker	S3	70 %	9 %	14 %	E0	AC1	AW2	AR0	C3	
CH26		trenching	uncommanded activation	collision with pedestrian or car	bystander	S2	70 %	12 %	14 %	E1	AC1	AW2	AR0	C3	
CH27		object handling	uncommanded activation	collision with pedestrian or car	co-worker	S3	80 %	6 %	11 %	E0	AC1	AW2	AR0	C3	
CH28		object handling	uncommanded activation	collision with pedestrian or car	bystander	S2	80 %	71 %	10 %	E1	AC1	AW2	AR0	C3	
CH21-28	swing/slew - stop / slow / hold still			considered to be the same as upper structure slew/swing											c
	cab tilt		considered machine abuse to be under cab unblocked in operation – not a safety function												
	cab elevate			considered to be the same as cab tilt											
	cab slide			considered to be the same as cab tilt											
	counterweight removal			not a safety function											
	engine speed			cannot cause increase in implement speed, therefore no significant hazard											

## D.2 Supporting explanation

### D.2.1 Supporting explanations for dominant scenarios

CH1 – acceleration / machine speed / direction

H: Only applicable during travel portion (4,7 %) – see [Table 2](#), 90 % idle factor. H = 4 %

P: Co-workers are aware of hazard and avoid being directly under the boom wherever possible but may not always be able to. P = 5 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

CH2 – acceleration / machine speed / direction

H: Only applicable during travel portion (4,7 %), 90 % idle factor. H = 4 %

P: See [5.5](#). P = 14 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

CH3 – acceleration / machine speed / direction

H: See [5.5](#), 50 % of failures hazardous. H = 40 %

P: Operator always present. P = 100 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

CH4, CH5 – acceleration / machine speed / direction

H: Only when in tight confines (50 %) and when stopping (10 %). H = 5 %

P: Co-workers are aware of hazard and avoid being directly under the boom wherever possible but may not always be able to. P = 5 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

CH6 – acceleration / machine speed / direction

H: Could happen at any point while loading machine onto transport. H = 100 %

P: Operator always present during cycle. P = 100 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

## CH7 – acceleration / machine speed / direction

H: Could happen at any point while loading machine onto transport. H = 100 %

P: People should not be standing in vicinity (may be in front or behind to guide machine on). P = 5 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

## CH8 – acceleration / machine speed / direction

H: Only hazardous during dump (10 %), 90 % idle factor. H = 9 %

P: Assumes people are aware of hazard of swinging machine on work area P=5 % plus traffic rate 1/6.  $P = (17 \% + 5 \% + 5 \%) / 2 = 14 \%$

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

## CH9 – acceleration / machine speed / direction

H: Only hazardous during dump plus last 25 % of swing (16 %), 90 % idle factor. H = 14 %

P: Assumes people are aware of hazard of swinging machine on work area P=5 % plus traffic rate 1/6.  $P = (17 \% + 5 \% + 5 \%) / 2 = 14 \%$

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

## CH10 – acceleration / machine speed / direction

H: Only hazardous last 25 % of swing (2 %) and when above the surface for lower – see [5.5](#) for more detail (8,5 %), 90 % idle factor. H = 10,3 %

P: See [5.5](#). P = 11 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

## CH11 – acceleration / machine speed / direction

H: Only hazardous during lash (21,3 %), last 25 % of swing (2 %) and when above the surface for lower – see [5.5](#) for more detail (8,5 %), 90 % idle factor. H = 31,6 %

P: People should not be in the area; barriers should be in place. P = 10 %

AC: AC1 – Turn machine off or apply park brake

AW: AW2

AR: AR0 – Not all operators would be able to react in time

## CH12 – track width extension

H: Results in no significant hazard

P: N/A

AC: N/A

AW: N/A

AR: N/A

CH13 – arm in

H: Only hazardous for half of lowering underground (50 % × 10 %) - another half at S2. 90 % idle factor. H = 5 %

P: It is considered machine abuse to be between object and pinch point, may be momentarily due to confined space. P = 5 %

AC: AC0 – No alternative controls

CH14 – boom up

H: Only hazardous for lashing and unlash. Based on 45/10/45 breakdown of time spend unlash and lashing and moving, 90 % of lashing / unlash. 90 % idle factor. H = 34 %

P: Only have hands in hazardous point when connecting chains. P = 10 %

AC: AC0 – No alternative controls

CH15 – boom up

H: Rare for power lines or overhead objects to be present. H = 1 %

P: Operator always present for the cycle. P = 1 %

AC: AC0 – No alternative controls

CH16 – boom down

H: Hazardous for half of lash and unlash  $((21,3 \% \times 2)/2)$ , 90 % idle factor. H = 19 %

P: It is considered machine abuse to stand below boom, may be close when grabbing chains in lashing or unlash. P = 2 %

AC: AC0 – No alternative controls

CH17 – arm in

H: See [D.2.3](#), 10 % of daily inspection, 25 % grease, 5 % wash 0 % windows / mirrors.  $H = (10 \% \times 15 \%) + (25 \% \times 25 \%) + (3 \% \times 5 \%) = 8 \%$

P: Typical P for maintenance tasks – 70 % of task on machine, 30 % of task off machine (changing / obtaining tools, preparation, cleaning etc). P = 70 %

AC: AC0 – No alternative controls

CH18 – auxiliary flow

H: Only during lower (28 %). 90 % idle factor. H = 26 %

P: Co-workers should be aware of the hazards of suspended load. P = 5 %

AC: AC0 – No alternative controls

CH19 – – blade down / float / tilt / angle

H: Results in no significant hazard

P: N/A

AC: N/A

AW: N/A

AR: N/A

#### CH20 – coupler engagement

H: Last 10 % of dump (10 %), 90 % idle factor.  $H = (10 \% \times 10 \%) \times 90 \% = 0,9 \%$

P: It is considered machine abuse to stand below boom, may be close when grabbing chains in lashing.  $P = 2 \%$

AC: AC0 – No alternative controls

#### CH21-22 – upper structure swing/slew

H: Only hazardous when traveling in tight confines.  $H = 50 \%$

P: People should not be standing in swing radius but may have to momentarily.  $P = 5 \%$

AC: AC1 – Turn machine off or apply hydraulic lockout

AW: AW2

AR: AR0 – Not all operators would be able to react in time

#### CH23 – upper structure swing/slew – considers the bucket at height between person's waist and head (S3)

H: See 5.5. Only hazardous stopping (last 25 %) while swing/slewing from A - B (25 % of cycle), 90 % idle factor.  $H = 6 \%$

P: People should not be standing in swing radius but may have to momentarily.  $P = 5 \%$

AC: AC1 – Turn machine off or apply hydraulic lockout

AW: AW2

AR: AR0 – Not all operators would be able to react in time

#### CH24 – upper structure swing/slew – considers bucket at height below person's waist (S2)

H: Hazardous in both swing directions while stopping (last 25 %). 90 % idle factor.  $H = 11 \%$

P: See 5.5.  $P = 14 \%$

AC: AC1 – Turn machine off or apply hydraulic lockout

AW: AW2

AR: AR0 – Not all operators would be able to react in time

#### CH25 – upper structure swing/slew – considers the bucket at height between person's waist and head (S3)

H: Hazardous only during dump (10 %). 90 % idle factor.  $H = 9 \%$

P: See 5.5.  $P = 14 \%$

AC: AC1 – Turn machine off or apply hydraulic lockout

AW: AW2

AR: AR0 – Not all operators would be able to react in time

CH26 – upper structure swing/slew – considers bucket at height below person's waist (S2)

H: Only dangerous during dump and last 10 % of dig ((10 %×35 %) +10 %), 90 % idle factor. H = 12 %

P: See 5.5. P = 14 %

AC: AC1 – Turn machine off or apply hydraulic lockout

AW: AW2

AR: AR0 – Not all operators would be able to react in time

CH27 – upper structure swing/slew – considers the bucket at height between person's waist and head (S3)

H: See 5.5 for S3 material handling H, 90 % idle factor. H = 7 % × 90 % = 6 %

P: Similar to 5.5, however people on site side of machine should be aware of the hazard and not in area (additional 5 % removed from calculation). P = 14 %

AC: AC1 – Turn machine off or apply hydraulic lockout

AW: AW2

AR: AR0 – Not all operators would be able to react in time

CH28 – upper structure swing/slew – considers bucket at height below person's waist (S2)

H: See 5.5 for S2 material handling H, 90 % idle factor. H = 79 % × 90 % = 71 %

P: People should not be in the area and barriers should be in place if next to public thoroughfare. P = 10 %

AC: AC1 – Turn machine off or apply hydraulic lockout

AW: AW2

AR: AR0 – Not all operators would be able to react in time

## D.2.2 Application use cases

Table D.2 — Application use case table

Application	Bucket work (truck loading, includes general digging, leveling with bucket) <sup>a</sup>	Trenching (co-worker may be present)	Object handling (includes truck loading objects, pipe laying, positioning etc.)	Leveling (grading with blade) <sup>a</sup>	Travel	Maintenance (including assembly and disassembly for transport - counterweight removal, track installation)	Transport (loading / unloading machine from truck)	Work tool (auxiliary hydraulic only - grapple, demolition, log loading) <sup>a</sup>
Mini HEX (Front mounted boom)	70 %	50 %	20 %	15 %	20 %	5 %	5 %	75 %
Medium HEX	80 %	70 %	80 %	15 %	20 %	5 %	2 %	90 %
Large HEX (36 000 kg - 99 000 kg)	85 %	70 %	10 %	0 %	20 %	5 %	1 %	20 %

<sup>a</sup> Could not find a scenario worse than trenching / object handling unless otherwise noted.

## D.2.3 Maintenance task breakdown

Table D.3 — Maintenance task breakdown

Task	Mini / Med		Large	
	Time (min/day)	% Maintenance time	Time (min)	% Maintenance time
daily inspection	6	15	4	7
refuel / DEF	10	25	20	34
lube / greasing	10	25	20	34
undercarriage removal	0	0	1	2
counterweight removal	0	0	0	1
wash	2	5	2	4
oil sample	1	1	1	2
clean windows and mirrors	5	13	5	8
troubleshooting	0	1	0	1
clean cooling package (waste application)	4	10	4	7
refill window washer	1	3	1	2
flash / calibrations	0	1	0	1

## D.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

**Table D.4 — Function dominant failure type matrix**

Function	Failure to apply on demand	Failure to re-release on demand	Uncommanded activation	Uncommanded deactivation	Notes
accelerate / machine speed / direction		1	1		Includes travel in wrong direction, each side is independent. Uncommanded deactivation is considered the same as failure to release on demand.
track width extension				1	Operator should not start operation until width is set to requirement.
boom up			1		Failure to release on demand has same outcome as uncommanded activation. Other failure types are less or not hazardous.
boom down			1		Failure to release on demand is considered no worse than uncommanded activation.
boom swing (L / R)		1	1		Other failure types are less or not hazardous.
boom offset			1		Failure to release on demand is considered no worse than uncommanded activation. Other failure types are less or not hazardous.
arm in			1		Other failure types are less or not hazardous.
arm out			1		Other failure types are less or not hazardous.
telescopic arm			1		Other failure types are less or not hazardous. Used only with clamshell.
bucket dump			1		Other failure types are less or not hazardous.
bucket curl			1		Other failure types are less or not hazardous.
auxiliary flow			1		Various failure types could cause uncommanded movement based on the tool type. All are considered here.
blade up			1		Other failure types are less or not hazardous.
blade down			1		Other failure types are less or not hazardous.
blade float					It is considered the same as blade up.
blade tilt					Considered the same as worse of blade up and blade down
blade angle					Considered the same as worse of blade up and blade down
quick coupler engagement				1	Other failure types are less or not hazardous.
swing/slew		1	1		Other failure types are less or not hazardous.
swing/slew slow/stop / hold still	1				Uncommanded deactivation is considered no worse than failure to apply on demand. Other failure types are less or not hazardous.
rated capacity indicator	1				Other failure types are less or not hazardous.
cab tilt			1		Other failure types are less or not hazardous.
cab elevate				1	Other failure types are less or not hazardous.
cab slide			1		Other failure types are less or not hazardous.
counterweight removal			1		Other failure types are less or not hazardous.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

**D.2.5 Notes and assumptions**

- Use cases requiring machine modification to be used safely are out of scope, e.g. forestry.
- Applications considered are: construction, utilities, oil and gas, agriculture, waste, demolition, general purpose (including rental), quarry.
- Machines used in material handling use cases are assumed to have appropriate control/check valves fitted (BLCV, SLCV) and be configured for lifting.
- Engine speed impact on other SCS is covered in those systems.
- Telescopic boom is not considered a common feature and thus not considered in this assessment.

- Excavators do not have active brake controls. It is part of the track control.
- Control pattern and mode change systems are the highest MPL<sub>r</sub> of the system that are being controlled by that function.
- For swing and uncommanded propel (causes rotation) calculations values for medium excavators have been used.
- Considered lifting bollards or barriers off a truck onto the ground and found it to be no worse than a ditch scenario.
- For swing calculations considered the co-worker as the S3 scenario and S2 for bystander to consider both scenarios. Both could be present interchangeably.
- It is machine abuse to lift objects over bystanders.
- Where hazard is present from object swinging there is a co-worker guiding object from a safe distance by rope or chain.
- Quick coupler scoring assumes couplers meet ISO 13031.
- Work tools require analysis specific to the type of work tool.
- For elevated cab machines, it is considered machine abuse for people to be under the unblocked cab during operation.
- For rated capacity indicator - using the capacity indicator is considered miss use. Due care shall be taken to ensure that load restrictions are followed. Analysis done on the assumption that people should not be relying on indicator.
- For maintenance, assumed that the implement is grounded. It is considered machine abuse if this is not the case.

### D.3 MPL<sub>r</sub> mapped to SCS table

Table D.5 shows function-based MPL<sub>r</sub> (see Table D.1) mapped to SCS per the results of the MCSSA for a crawler excavator. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table D.1 would also be mapped to these MPL<sub>r</sub>.

Table D.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL required	Example of mapped system
acceleration / machine speed / direction	failure to release on demand	c	propel
	uncommanded activation		
track width extension	uncommanded activation	QM	track width extension
boom up	uncommanded activation	c	boom raise
boom down	uncommanded activation	c	boom lower
boom swing (L / R)	uncommanded activation	c	boom swing
boom offset	uncommanded activation	c	boom offset
arm in	uncommanded activation	c	arm in
arm out	uncommanded activation	c	arm out
telescopic arm	uncommanded activation	c	telescopic arm
bucket dump	uncommanded activation	c	bucket dump
bucket curl	uncommanded activation	c	bucket curl
auxiliary flow	uncommanded activation	c	auxiliary flow

Table D.5 (continued)

Machine function	Failure type	MPL re-quired	Example of mapped system
blade up	uncommanded activation	<b>c</b>	blade raise
blade down/float/ tilt / angle	uncommanded activation	<b>QM</b>	blade lower / float / tilt / angle
coupler engagement	uncommanded deactivation	<b>c</b>	coupler engagement
upper structure swing/slew	uncommanded activation	<b>c</b>	swing/slew
	failure to release on demand		
swing/slew - stop / slow down / hold still	uncommanded activation	<b>c</b>	swing/slew brake
implement rotate	uncommanded activation	<b>c</b>	implement rotate

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex E (normative)

### Wheeled excavators performance level tables

#### E.1 Wheeled excavators

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables E.1](#) to [E.5](#)) or in [Clause 5](#).

Table E.1 — MPL<sub>r</sub> table for wheeled excavators

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
WE1	machine speed	roading	failure to release on demand	machine stops later than expected due to throttle being stuck on - bystander	bystander	S3	35 %	10 %	100 %	E1	AC1	AW2	AR3	C1	b	
WE2	machine direction	lifting	failure to apply on demand	machine goes in opposite direction than intended - enters area where machine is not expected	co-worker	S3	75 %	2 %	20 %	E0	AC1	AW2	AR3	C1	a	
WE3		travel	failure to apply on demand	machine goes in opposite direction than intended - enters area where machine is not expected - Moving machine into tighter area	bystander	S3	35 %	1 %	5 %	E0	AC1	AW2	AR3	C1		
WE12-13	boom up	considered to be the same blade-down														
WE4		lifting	uncommanded activation	injury to fingers if in the process of lashing or unlash	co-worker	S2	75 %	34 %	10 %	E1	AC0	N/A	N/A	N/A	C3	c
WE5		travel	uncommanded activation	boom raises into overhead object or power lines	operator	S3	35 %	1 %	100 %	E0	AC0	N/A	N/A	N/A	C3	

<sup>a</sup> A car or larger vehicle would be a lower severity injury.

Table E.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
WE12-13	boom down	lifting	uncommanded activation	crushed by boom, object on ground for parts of cycle that are hazardous	co-worker	S3	75 %	19 %	2 %	E0	AC0	N/A	N/A	C3	c	
WE6																
WE15-17	boom offset	maintenance	uncommanded activation	crush body	maintainer	S3	5 %	2 %	70 %	E0	AC0	N/A	N/A	C3	c	
WE10																
WE8	arm in	material handling	uncommanded activation	work tool enters cab (when machine has intermediate boom)	operator	S3	90 %	1 %	100 %	E0	AC1	AW2	AR0	C3	c	
WE7																
WE8																
WE9	arm out	lifting	uncommanded activation	hit by object being lifted	co-worker	S3	75 %	5 %	5 %	E0	AC0	N/A	N/A	C3	c	
WE7																
WE7	tool dump															c
WE7	tool curl															c
WE11	auxiliary flow	work tool	uncommanded activation	grabbing bucket / clamshell bucket opens dropping load.	co-worker	S2	80 %	26 %	5 %	E0	AC0	N/A	N/A	C3	c	
WE6	blade up															c

<sup>a</sup> A car or larger vehicle would be a lower severity injury.

Table E.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
WE12	blade down	roading	uncommanded activation	sudden stop from hitting ground, man-hole cover, rail track	operator	S1	35 %	50 %	100 %	E2	AC0	N/A	N/A	C3	c
WE13		travel / roading	uncommanded activation	vehicle behind collides with rear of machine	bystander	S3	35 %	50 %	5 %	E0	AC0	N/A	N/A	C3	
WE14	coupler engagement	trenching	uncommanded deactivation	bucket thrown from machine	co-worker	S3	70 %	1 %	1 %	E0	AC0	N/A	N/A	C3	c
WE7															
WE15	upper structure swing/slew	trenching	failure to release on demand	machine swings into co-worker or bystander	bystander	S3	70 %	6 %	5 %	E0	AC0	N/A	N/A	C3	c
WE16		trenching	uncommanded activation	machine swings / slews into bystander	bystander	S3	70 %	9 %	14 %	E0	AC0	N/A	N/A	C3	
WE17		lifting	uncommanded activation	machine swings / slews into bystander	co-worker	S3	75 %	4 %	11 %	E0	AC0	N/A	N/A	C3	
WE18	upper structure swing/slew hold still	roading	uncommanded deactivation	machine swings into traffic	bystander	S3	35 %	100 %	25 %	E1	AC0	N/A	N/A	C3	d
WE19	cab lower	maintenance	uncommanded activation	crush	maintainer	S3	5 %	2 %	70 %	E0	AC0	N/A	N/A	C3	c
WE20	cab elevate	travel	uncommanded activation	cab rises and hits overhead powerline or structure	operator	S3	35 %	1 %	100 %	E0	AC1	AW3	AR3	C0	QM

<sup>a</sup> A car or larger vehicle would be a lower severity injury.

Table E.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
WE21	hold still	bucket work	failure to apply on demand	runaway machine	co-worker	S3	80 %	5 %	20 %	E0	AC0	N/A	N/A	C3	c
WE22		travel	failure to apply on demand	runaway machine	bystander	S3	35 %	5 %	25 %	E0	AC0	N/A	N/A	C3	
WE23	implement rotate	work tool	uncommanded activation	contact with object	co-worker	S3	80 %	37 %	2 %	E0	AC0	N/A	N/A	C3	c
WE8	intermediate boom up	considered to be the same arm out													
WE7	intermediate boom down	considered to be the same as arm in													
WE24	oscillating axle unlock	bucket work	uncommanded activation	machine rolls over	operator	S1	80 %	100 %	100 %	E2	AC0	N/A	N/A	C3	c
WE25		lifting	uncommanded activation	machine rolls over	co-worker	S3	75 %	4 %	20 %	E0	AC0	N/A	N/A	C3	
WE8	considered to be the same as upper structure slew / swing														
WE24-25	stabilizers up	considered to be the same arm out													
WE12-13	stabilizers down	considered to be the same blade down													
WE26		roading	uncommanded activation	stabilizers lower while in traffic - collision	bystander	S3	35 %	20 %	10 %	E0	AC0	N/A	N/A	C3	c
WE27	steering	roading	uncommanded activation	machine steers into traffic	bystander	S3	35 %	100 %	16 %	E1	AC1	AW2	AR0	C3	d
WE27	steering mode change	considered to be the same as steering													
<sup>a</sup> A car or larger vehicle would be a lower severity injury.															

Table E.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
WE28	slow/stop	travel	failure to apply on demand	collision	bystander	S3	35 %	50 %	10 %	E1	AC1	AW2	AR2	C2	c
WE29		roading	uncommanded activation	machine stops without command - collision with vehicle following	operator	S1	35 %	50 %	100 %	E2	AC0	N/A	N/A	C3	
WE30	transmission neutralize	roading	uncommanded activation	machine stops without command - trailing vehicle or motorcycle collides with machine.	bystander	S3	35 %	50 %	5 %	E0	AC0	N/A	N/A	C3	a
WE31		travel	uncommanded deactivation	machine moves into vehicle or bystander	bystander	S3	35 %	3 %	25 %	E0	AC1	AW2	AR3	C1	

<sup>a</sup> A car or larger vehicle would be a lower severity injury.



## E.2 Supporting explanation

### E.2.1 Supporting explanations for dominant scenarios

#### WE1 – machine speed

H: Only hazardous when braking to avoid pedestrian or vehicle. H = 10 %

P: Assumes pedestrian always present when needing to stop at pedestrian crossing. P = 100 %

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

#### WE2 – machine direction

H: Only hazardous at the start of the travel portion. H = 2 %

P: Construction site co-worker rate. P = 20 %

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during operation is considered underfoot. Machine moves very slow during direction change.

#### WE3 – machine direction

H: Rarely change direction while traveling. H = 1 %

P: Rarely people between machine and object / vehicle or in parked vehicle. P = 5 %

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot. Machine moves very slow during direction change.

#### WE4 – boom up

H: Only hazardous for lashing and unlash. Based on 45/10/45 breakdown of time spend unlash and lashing and moving, 90 % of lashing / unlash. 90 % idle factor. H = 34 %

P: Only have hands in hazardous point when connecting chains. P = 10 %.

AC: AC0

#### WE5 – boom up

H: Rare for powerlines / objects to be present. H = 10 %

P: Operator present throughout cycle. P = 100 %.

AC: AC0

#### WE6 – boom down

H: 50 % lash, 50 % unlash (see 5.3), 90 % idle factor. H = 18 %

P: It is considered machine abuse for co-worker to stand below boom, may be close when grabbing chains in lashing. P = 2 %.

AC: AC0

WE7 – arm in

H: Boom shall be at upper limits of heights - only likely during release when loading a high hopper. 5 % of release (see 5.3), 90 % idle factor. H = 1 %

P: Operator present throughout cycle. P = 100 %.

AC: AC1 – key switch

AW: AW2

AR: AR0

WE8 – arm out

H: Hazardous for half of lowering underground (50 % × 10 %) – the other half at S2. 90 % idle factor. H = 5 %

P: It is considered machine abuse to be between object and pinch point, may be momentarily due to confined space. P = 5 %.

AC: AC0

WE9 – arm out

H: Only when stopped in traffic. H = 5 %

P: Only when stopped behind vehicles of specific heights. P = 1 %.

AC: AC0

WE10 – boom offset

H: Only hazardous for 10 % of greasing (19 %).  $H = 1\% \times 19\% = 2\%$

P: See 5.8. Maintainer on machine for 70 % of task on smaller machine. P = 70 %.

AC: AC0

WE11 – auxiliary flow

H: Hazardous while lowering only (28 %), 90 % idle factor. H = 26 %

P: People should not be under suspended load but may be momentarily. P = 5 %.

AC: AC0

WE12 – blade down

H: Hazard present when the machine is travelling at higher speeds and not stopping. H = 50 %

P: Operator present throughout cycle. P = 100 %.

AC: AC0

WE13 – blade down

H: Only hazard when in heavy traffic. H = 50 %

P: Vehicles should be going same speed as machine, and maintaining legal safe distances, only S3 for bikes and scooters. P = 5 %.

AC: AC0

#### WE14 – coupler engagement

H: Last 10 % of dump (10 %), 90 % idle factor.  $H = (10 \% \times 10 \%) \times 90 \% = 0,9 \%$

P: It is considered machine abuse to be standing near a load being dumped. P = 1 %

AC: AC0

#### WE15 – upper structure swing/slew

H: Swing from A - B (25 % of cycle), stopping in last 25 %, 90 % idle factor. See Table 3.  $H = (25 \% \times 25 \%) \times 90 \% = 6 \%$

P: It is considered machine abuse to be standing within swing/slew radius of machine, could happen momentarily. P = 5 %

AC: AC0

#### WE16 – upper structure swing/slew

H: Only dangerous during dump (10 %), 90 % idle factor. See 5.5.  $H = 9 \%$

P: It is considered machine abuse to be standing within swing/slew radius of machine, could happen momentarily, P = 5 % in work zone, traffic rate 1/6.  $P = ((17 \% + 5 \%) + 5 \%) / 2 = 14 \%$

AC: AC0

#### WE17 – upper structure swing/slew

H: 90 % idle factor, 50 % failures hazardous. See 5.5.  $H = 8,5 \% \times 50 \% \times 90 \% = 4 \%$

P: See 5.5.2. P = 11 %

AC: AC0

#### WE18 – upper structure swing/slew hold still

H: Hazard exists during the whole cycle.  $H = 100 \%$

P: For collision in one direction collision with the front of a car (bucket below roof height is hazardous) - traffic rate 1 car every 3 car lengths (33 %). For swing in the other direction collision with the rear of the car (bucket greater than approximately 1 m off ground is hazardous), traffic rate 1/6 (see 5.5.2).  $P = (33 \% + 17 \%) / 2 = 25 \%$ .

AC: AC0

#### WE19 – cab lower

H: 10 % of greasing (19 %).  $H = 2 \%$

P: See 5.8. Maintainer on machine for 70 % of task on smaller machine. P = 70 %.

AC: AC0

#### WE20 – cab raise

H: Rare for powerlines / objects to be present.  $H = 1 \%$

P: Operator present throughout cycle. P = 100 %.

AC: AC1 – brakes

AW: AW3 – Cab raises slowly and is not hazardous until the end of the range of motion

AR: AR3 - Stop before the machine hits object

WE21 – hold still

H: When machine stopped, bucket off ground when it should be grounded. H = 5 %

P: Construction site co-worker rate. P = 20 %

AC: AC0

WE22 – hold still

H: When machine stopped, bucket off ground when it should be grounded. H = 5 %

P: See 5.6 for park up area (considered similar for longitudinal traffic). P = 25 %.

AC: AC0

WE23 – implement rotate

H: Hazardous for 33 % or grab (30 %) and release (10 %), all loaded swing (25 %). 90 % idle factor.  
 $H = [(33 \% \times 38 \%) + (25 \%) + (33 \% \times 10 \%) ] \times 90 \%$

P: It is considered machine abuse to be in pinch area for pipe laying, or that close to swinging machine. May occur momentarily. P = 2 %.

AC: AC0

WE24 – oscillating axle unlock

H: Hazard exists during the whole cycle. H = 100 %

P: Operator present throughout cycle. P = 100 %.

AC: AC0

WE25 – oscillating axle unlock

H: Only hazardous higher speed portions of swing or lifting load high (50 % × 8 %), idle factor 90 %.  
H = 4 %

P: Construction site co-worker rate. P = 20 %

AC: AC0

WE26 – stabilizers down

H: See 5.9. 20 % of the arc passes through where traffic could be. H = 20 %

P: See 5.9. Traffic / pedestrians would rarely be this close to the machine. P = 10 %

AC: AC0

WE27 – steering

H: Hazard exists during the whole cycle. H = 100 %

P: See 5.2. P = 16 %.

AC: AC1 – brakes

AW: AW2

AR: AR0

WE28 – slow/stop

H: Only hazardous when wanting to stop or slow - worst case in traffic. H = 50 %

P: rarely slowing to avoid hitting pedestrian. P = 10 %.

AC: AC1 – park brake

AW: AW2

AR: AR2

WE29 – slow/stop

H: Hazard present when the machine is travelling at higher speeds and not stopping. H = 50 %

P: Operator present throughout cycle. P = 100 %.

AC: AC0

WE30 – slow/stop – S3 has been used because following vehicle could be a motorcycle. A car would be S2 or S1.

H: Only hazardous when not stopping or slowing. H = 50 %

P: Vehicles should be going same speed as machine and maintaining legal safe distances. P = 5 %.

AC: AC0

WE31 – transmission neutralize

H: Time when machine is idle while waiting and portion of travel that is low speed manoeuvring (1 / 6).  $H = 0,2 \times 1 / 6 = 3 \%$

P: Typical bystander rate in central / parking areas. P = 25 %.

AC: AC1 – brakes

AW: AW2

AR: AR3 – The brakes would be under foot and the machine moves slowly

## E.2.2 Application use cases

Table E.2 — Application use case table

Application	Bucket work (truck loading, includes general digging, leveling with bucket)	Trenching (co-worker may be present)	Lifting (auspended load includes truck loading objects, pipe laying, positioning etc.)	Leveling (grading with blade)	Travel	Maintenance (including assembly and disassembly for transport - counterweight removal, track installation)	Transport (loading / unloading machine from truck)	Work tool (auxiliary hydraulic only - grapple, demolition, log loading)
Construction (road and general)	80 %	70 %	75 %	15 %	35 %	5 %	2 %	8 %
Material handling (waste, forestry, demolition)	20 %	0 %	0 %	5 %	1 %	5 %	2 %	9 %

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

### E.2.3 Maintenance task breakdown

Table E.3 — Maintenance task breakdown

	Time (min/ day)	% Maintenance Time
daily inspection	10	19
refuel / DEF	10	19
lube / greasing	10	19
tire pressure check / top up	10	19
wash	10	1
oil sample	15	1
clean windows and mirrors, cameras	5	10
troubleshooting	30	1
clean cooling package (waste application)	4	8
refill window washer	1	2
flash / calibrations	60	1

### E.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table E.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine speed		1	1		Apply is increase, release is decrease. Other failure types are not considered hazardous.
machine direction	1				Uncommanded change in direction is considered the same as uncommanded slow/stop. Other failure types are considered the same as failure on demand.
transmission neutralize				1	Uncommanded deactivation is the same as failure to neutralize. Other failure types are not hazardous.
bucket curl			1		Other failure types are less or not hazardous.
bucket dump			1		Other failure types are less or not hazardous.
arm in			1		Other failure types are less or not hazardous.
arm out			1		Other failure types are less or not hazardous.
boom up			1		Other failure types are less or not hazardous.
boom down			1		Other failure types are less or not hazardous.
intermediate boom up			1		Other failure types are less or not hazardous.
intermediate boom down			1		Other failure types are less or not hazardous.
blade up			1		Other failure types are less or not hazardous.
blade down			1		Other failure types are less or not hazardous.
stabilizers up			1		Other failure types are less or not hazardous.
stabilizers down			1		Other failure types are less or not hazardous.
coupler engagement				1	Other failure types are less or not hazardous.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

Table E.4 (continued)

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
boom offset / side shift			1		Other failure types are less or not hazardous.
implement rotate			1		Other failure types are less or not hazardous.
auxiliary flow			1		Other failure types are less or not hazardous.
slow/stop	1		1		Uncommanded deactivation is the same as failure to neutralize. Other failure types are not hazardous.
hold still	1				It is the same as uncommanded release.
steering			1		Considered all failure types within uncommanded steering.
steering mode change			1		Considered all failure types within uncommanded mode change.
cab rise			1		Other failure types are less or not hazardous.
cab lower			1		Other failure types are less or not hazardous.
oscillating axle unlock			1		Other failure types are considered in oscillating axle lock.
oscillating axle lock	1	1			Other failure types are considered in oscillating axle unlock.
upper structure swing		1	1		Includes swing lock, considers both a failure to stop and an uncommanded swing.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

E.2.5 Notes and assumptions

- Covers wheeled excavators of all sizes.
- Travel lock  $MPL_r$  is determined by the functions it controls, which will vary by function. The system design may be broken into sub functions.
- Travel during lifting could be as high as 50 % of cycle for wheeled excavators.
- Wheeled excavators up to 25 000 kg can be used in roading applications.
- Assumptions and grounds for swing analysis shall be documented and communicated by the manufacturer in the information for use.
- Uncommanded direction change, uncommanded slow/stop and uncommanded hold still are considered to be the same hazardous outcome – the machine would stop suddenly without warning to the operator or a person following behind the machine.

E.3  $MPL_r$  mapped to SCS table

Table E.5 shows function-based  $MPL_r$  (see Table E.1) mapped to SCS per the results of the MCSSA for a wheeled excavator. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table E.1 would also be mapped to these  $MPL_r$ .

Table E.5 —  $MPL_r$  mapped to SCS

Machine function	Failure type	MPL required	Example of mapped system
machine speed	failure to release on demand	<b>b</b>	throttle and speed gear control
machine direction	failure to apply on demand	<b>a</b>	gear direction control
boom up	uncommanded activation	<b>c</b>	boom raise

Table E.5 (continued)

Machine function	Failure type	MPL required	Example of mapped system
boom down	uncommanded activation	<b>c</b>	boom lower
boom offset	uncommanded activation	<b>c</b>	boom offset
arm in	uncommanded activation	<b>c</b>	arm in
arm out	uncommanded activation	<b>c</b>	arm out
tool dump	uncommanded activation	<b>c</b>	tool dump
tool curl	uncommanded activation	<b>c</b>	tool curl
auxiliary flow	uncommanded activation	<b>c</b>	auxiliary flow
blade up	uncommanded activation	<b>c</b>	blade raise
blade down	uncommanded activation	<b>QM</b>	blade lower
coupler engagement	uncommanded deactivation	<b>c</b>	coupler engagement
	uncommanded activation		
upper structure swing/slew	failure to release on demand	<b>c</b>	slew / swing
	uncommanded activation		
upper structure swing/slew hold still	uncommanded activation	<b>d</b>	slew / swing brake
cab lower	uncommanded activation	<b>c</b>	cab lower
cab elevate	uncommanded activation	<b>QM</b>	cab raise
hold still	failure to apply on demand	<b>c</b>	parking brakes
implement rotate	uncommanded activation	<b>c</b>	implement rotate
intermediate boom up	uncommanded activation	<b>c</b>	intermediate boom raise
intermediate boom down	uncommanded activation	<b>c</b>	intermediate boom lower
oscillating axle unlock	uncommanded activation	<b>c</b>	oscillating axle unlock
stabilizers up	uncommanded activation	<b>c</b>	stabilizers up
stabilizers down	uncommanded activation	<b>c</b>	stabilizers down
steering	uncommanded activation	<b>d</b>	steering
steering mode change	uncommanded activation	<b>d</b>	steering mode change
transmission neutralize	uncommanded deactivation	<b>a</b>	gear direction control
slow/stop	failure to apply on demand	<b>c</b>	service brakes
	uncommanded activation		

## Annex F (normative)

### Backhoe loaders performance level tables

#### F.1 Backhoe loaders

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables F.1](#) to [F.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table F.1 — MPL<sub>r</sub> table for backhoe loaders

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
BH1		travel / roading	uncommanded activation	machine speed increases - increased stopping distance and decreased operator ability to steer	bystander	S3	30 %	40 %	16 %	E1	AC1	AW2	AR3	C1	
BH2	machine speed	travel / roading	failure to release on demand	machine speed increases - increased stopping distance and decreased operator ability to steer - pedestrian	bystander	S3	30 %	50 %	10 %	E1	AC1	AW2	AR3	C1	<b>b</b>
BH9-10	machine direction			considered to be the same as uncommanded hold still											<b>c</b>
BH3	hoe boom up			considered to be the same as hoe boom down											<b>c</b>
BH3	hoe boom down	lifting	uncommanded activation	crushed by object	co-worker	S3	20 %	19 %	2 %	E0	AC0	N/A	N/A	C3	<b>c</b>
BH7-8	hoe boom offset			considered to be the same as hoe slow / swing											<b>c</b>
BH4-5	hoe arm in			considered to be the same as hoe arm out											<b>c</b>
BH4	hoe arm	travel	uncommanded activation	hit by bucket	co-worker	S3	30 %	2 %	100 %	E0	AC0	N/A	N/A	C3	<b>c</b>
BH5	hoe arm out	lifting	uncommanded activation	crushed between load and trench wall	co-worker	S3	20 %	5 %	5 %	E0	AC0	N/A	N/A	C3	<b>c</b>
BH4-5	hoe tool dump			considered to be the same as arm out											<b>c</b>
BH4-5	hoe tool curl			considered to be the same as arm out											<b>c</b>
	hoe auxiliary flow			tools used on backhoe loaders were not considered to be hazardous. If tools are used similar to crawler or wheeled excavators than the MPL <sub>r</sub> for those machines shall be used – not a safety function											<b>c</b>

<sup>a</sup> A car or larger vehicle would be a lower severity injury.

Table F.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
BH9-10	loader boom up			considered to be the same as uncommanded hold still											c
BH3															
BH9-10	loader boom down			considered to be the same as uncommanded park brake activation. If loader lower could cause a loss of steering, then the MPL <sub>r</sub> for failure to steering shall be used											c
BH3															
BH9-10	loader tool dump			considered to be the same as uncommanded hold still											c
BH3															
BH9-10	loader tool curl			considered to be the same as uncommanded hold still											c
BH3															
BH6	hoe coupler engagement	hoe	uncommanded deactivation	hit by falling bucket (when lifting from a point on bucket)	co-worker	S3	70 %	1 %	1 %	E0	AC0	N/A	N/A	C3	c
BH3															
BH7	hoe swing/slew	lifting	uncommanded activation	collision between hoe linkage and co-worker or bystander	bystander	S3	20 %	19 %	11 %	E0	AC0	N/A	N/A	C3	c
BH8															
<sup>a</sup> A car or larger vehicle would be a lower severity injury.															

Table F.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
BH9	hold still	roading	uncommanded activation	machine stops without command - collision with vehicle following	operator	S1	30 %	50 %	100 %	E2	AC0	N/A	N/A	C3		
BH10		roading	uncommanded activation	machine stops without command - Trailing vehicle or motorcycle collides with machine. <sup>a</sup>	bystander	S3	30 %	50 %	5 %	E0	AC0	N/A	N/A	C3	c	
BH11		maintenance	failure to apply on demand	runover by rolling machine	maintainer	S3	5 %	18 %	70 %	E0	AC0	N/A	N/A	C3		
BH3	stabilizers up	considered to be the same as hoe boom down														c
BH9-10	stabilizers down	for a side-shift machine it is considered the same as uncommanded hold still														c
BH4-5		for a centre pivot it is considered the same as arm out														
BH12	steering	roading	uncommanded activation	collision	bystander	S3	30 %	100 %	16 %	E1	AC1	AW2	AR0	C3	d	
BH12	steering mode change	Considered to be the same as steering														d
BH13	slow/stop	roading	failure to apply on demand	machine fails to stop - collision	bystander	S3	30 %	10 %	100 %	E1	AC1	AW2	AR2	C2	c	
BH14	transmission neutralize	roading	uncommanded deactivation	machine moves into vehicle or bystander	bystander	S3	30 %	4 %	25 %	E0	AC1	AW2	AR3	C1	a	
BH1-2	engine speed	considered to be the same as machine speed														b
BH9-11	hoe arm extend out	considered the same as uncommanded activation of the park brake														c
BH4-5		considered to be the same as arm out														
	loader auxiliary function	tools used on backhoe loaders were not considered to be hazardous. If tools are used similar to crawler or wheeled excavators than the MPL <sub>r</sub> for those machines shall be used														N/A
<sup>a</sup>	A car or larger vehicle would be a lower severity injury.															

Table F.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
	loader coupler				no single failure to be hazardous										N/A

<sup>a</sup> A car or larger vehicle would be a lower severity injury.

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## F.2 Supporting explanation

### F.2.1 Supporting explanations for dominant scenarios

#### BH1 – machine speed

H: Only hazardous when not at high idle - worse case in traffic. H = 40 %

P: See 5.2. P = 16 %.

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

#### BH2 – machine speed

H: Only hazardous when wanting to stop or slow - worst case in traffic. H = 50 %

P: Rarely slowing to avoid hitting pedestrian. P = 10 %.

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

#### BH3 – hoe boom lower

H: Hazardous for half of lash and unlash  $[(21,3 \% \times 2 \%)/2]$ , 90 % idle factor. H = 19 %

P: It is considered machine abuse to stand below boom, may be close when grabbing chains in lashing or unlash. P = 2 %

AC: AC0

#### BH4 – hoe arm out

H and P: P×H value - see 5.9.  $P \times H = 20 \% \times 10 \% = 2 \%$

AC: AC0

#### BH5 – hoe arm out

H: Half of the proportion of lowering is underground (considered to be 10 % of total cycle) - another half at S2 (5 %). 90 % idle factor. H = 4,5 %

P: People should not be in this area but may be momentarily. P = 5 %.

AC: AC0

#### BH6 – hoe coupler engagement

H: Last 10 % of dump, 90 % idle factor.  $H = 10 \% \times 10 \% \times 90 \% = 1 \%$

P: It is considered machine abuse to be standing near a load being dumped. P = 1 %.

AC: AC0

AW: AW2

AR: AR3

BH7 – hoe boom swing

H: See 5.5. Worst case considered was material handling from flatbed truck. 90 % idle factor.  $H = 21 \% \times 90 \% = 19 \%$

P: Hitch and lift where traffic present in swing. Traffic rate (see 5.5.2), people there 5 % of the time and only dangerous for swing direction only 1 way (divide by 2).  $P = (17 \% + 5 \%) / 2 = 11 \%$

AC: AC0

BH8 – hoe boom swing

H: It is hazardous during the whole cycle, 90 % idle factor.  $H = 90 \%$

P: It is considered machine abuse for a person to be around the machine during truck loading.  $P = 2 \%$

AC: AC0

BH9 – hold still

H: Hazard present when the machine is travelling at higher speeds and not stopping.  $H = 50 \%$

P: Operator present throughout cycle.  $P = 100 \%$

AC: AC0

BH10 – hold still

H: Hazard present when the machine is travelling at higher speeds and not stopping.  $H = 50 \%$

P: Following vehicles should be traveling at the same speed as the machine, it is considered machine abuse to be following the machine within vehicle stopping distance.  $P = 5 \%$

AC: AC0

BH11 – hold still

H: Only hazardous for portions of tasks with loader in the air (boom lock installed) 20 %. 88 % of total maintenance.  $H = 18 \%$

P: See 5.8. Maintainer on machine for 70 % of task on smaller machine.  $P = 70 \%$ .

AC: AC0

BH12 – steering

H: Only hazardous for all of time machine is on the road.  $H = 100 \%$

P: See 5.2.  $P = 16 \%$ .

AC: AC1 – brakes

AW: AW2

AR: AR0

BH13 – slow/stop

H: Percentage of time slowing / stopping to avoid hitting pedestrian or vehicle.  $H = 10 \%$

P: Someone is present whenever machine is stopping to avoid hitting someone.  $P = 100 \%$ .

AC: AC1 – park brake (steering may not always help avoiding collision)

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

BH14 – transmission neutralize

H: Time when machine is idle (20 %) during low speed manoeuvring (20 %).  $H = 20 \% \times 20 \% = 4 \%$

P: Typical bystander rate in central / parking areas.  $P = 25 \%$ .

AC: AC1 – brakes

AW: AW2

AR: AR3 – The brakes would be under foot and the machine moves slowly

## F.2.2 Application use cases

Table F.2 — Application use case table

Application	Travel (including roading)	Loader - bucket, 4-in-1 Bucket	Loader work tools - sweepers, mulchers, snow blowers	Loader object handling	Hoe	Hoe work tools - hammer, compacting plate, auger	Hoe - object handling	Maintenance
Utility	30 %	30 %	20 %	20 %	70 %	30 %	20 %	5 %
Civil	30 %	20 %	20 %	15 %	70 %	40 %	15 %	5 %
Construction	20 %	40 %	20 %	10 %	50 %	20 %	15 %	5 %

## F.2.3 Maintenance task breakdown

Table F.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
parking brake test	2	11
clean windows	5	28
grease	5	28
transmission oil check	2,5	14
engine oil check	2,5	14
top up transmission oil	0,25	1
top up engine oil	0,25	1
troubleshooting	0,5	3

## F.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

**Table F.4 — Function dominant failure type matrix**

Subsystem	Failure to apply on demand	Failure to re-release on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine speed		1	1		Activation is increase; release is decrease. Other failure types are less or not hazardous.
engine speed			1		Activation is increase; release is decrease. Other failure types are less or not hazardous.
direction change	1				Uncommanded change in direction is considered the same as uncommanded slow/stop. Other failure types considered the same as failure on demand.
loader raise					Less hazardous than loader lower
loader lower			1		Other failure types are less or not hazardous.
loader bucket dump			1		Other failure types are less or not hazardous.
loader bucket curl					Less hazardous than loader dump
loader quick coupler				1	Other failure types are less or not hazardous.
hoe boom swing			1		Failure to release on demand just as hazardous as uncommanded activation - both considered under uncommanded activation. Other failure types are less or not hazardous.
hoe boom raise					Less hazardous than boom lower
hoe boom lower			1		Other failure types are less or not hazardous.
hoe arm raise / out			1		Other failure types are less or not hazardous.
hoe arm lower / in					both in and out are hazardous - will consider both
hoe arm extend out			1		Other failure types are less or not hazardous.
hoe arm retract in					Less hazardous than out
hoe bucket dump			1		Other failure types are less or not hazardous.
hoe bucket curl					Less hazardous than hoe dump
hoe quick coupler				1	Other failure types are less or not hazardous.
loader auxiliary function			1		Other failure types are less or not hazardous.
hoe auxiliary function			1		Other failure types are less or not hazardous.
hoe side shift			1		Other failure types are less or not hazardous.
slow/stop	1				Uncommanded slow / slow stop considered under uncommanded Hold Still. Other failure types considered under failure to apply on demand or are less or not hazardous
hold still	1		1		Other failure types are less or not hazardous.
steering			1		All failure types are hazardous - considered all under uncommanded activation.
all wheel steering / crab steer			1		Uncommanded activation is more hazardous than failure on demand because the intention is to steer, but gets a different radius vs. the unexpected nature of uncommanded activation
stabilizer raise					Lower is more dangerous
stabilizer lower			1		Other failure types are less or not hazardous.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

**F.2.5 Notes and assumption**

- Powered hand tools considered to not require anything of the machine control systems have not been considered in this assessment - flow rate settings are considered under loader auxiliary function.
- Implement lockout MPL<sub>r</sub> is the same as the MPL<sub>r</sub> of the function it is locking out.

- Uncommanded change in direction is considered to be the same as uncommanded park brake activation – sudden stop with no warning -  $MPL_r$  for this failure type from uncommanded slow/stop.
- Auxiliary functions are not assessed in this MCSSA. Due to the large number of possible tools that could be fitted, it is not possible to assess in a general sense. Machine functions based on tool combinations need to be assessed individually by the OEM, through the process outlined in ISO 19014-1.
- Uncommanded direction change, uncommanded slow/stop and uncommanded hold still are considered to be the same hazardous outcome – the machine would stop suddenly without warning to the operator or a person following behind the machine.

### F.3 $MPL_r$ mapped to SCS table

Table F.5 shows function-based  $MPL_r$  (see Table F.1) mapped to SCS per the results of the MCSSA for a backhoe loader. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table F.1 would also be mapped to these  $MPL_r$ .

Table F.5 —  $MPL_r$  mapped to SCS

Machine function	Failure type	$MPL$ re- quired	Example of mapped system
machine speed	uncommanded activation	<b>b</b>	throttle and speed gear control
	failure to release on demand		
machine direction	uncommanded activation	<b>c</b>	gear direction control
hoe boom up	uncommanded activation	<b>c</b>	hoe boom raise
hoe boom down	uncommanded activation	<b>c</b>	hoe boom lower
hoe boom offset	uncommanded activation	<b>c</b>	hoe boom offset
hoe arm in	uncommanded activation	<b>c</b>	hoe arm in
hoe arm out	uncommanded activation	<b>c</b>	hoe arm out
hoe tool dump	uncommanded activation	<b>c</b>	hoe tool dump
hoe tool curl	uncommanded activation	<b>c</b>	hoe tool curl
hoe auxiliary flow	Tools used on backhoe loaders were not considered to be hazardous. If tools are used similar to crawler or wheeled excavators than the $MPL_r$ for those machines shall be used	<b>N/A</b>	hoe auxiliary flow
loader boom up	uncommanded activation	<b>c</b>	loader boom raise
loader boom down	uncommanded activation	<b>c</b>	loader boom lower
loader tool dump	uncommanded activation	<b>c</b>	loader tool dump
loader tool curl	uncommanded activation	<b>c</b>	loader tool curl
hoe coupler engagement	uncommanded deactivation	<b>b</b>	hoe coupler engagement
hoe swing/slew	uncommanded activation	<b>c</b>	hoe swing/slew
hold still	uncommanded activation	<b>c</b>	parking brakes
	failure to apply on demand		
stabilizers up	uncommanded activation	<b>c</b>	stabilizers up
stabilizers down	uncommanded activation	<b>c</b>	stabilizers lower
steering	uncommanded activation	<b>d</b>	steering
steering mode change	uncommanded activation	<b>d</b>	steering mode change
transmission neutralize	uncommanded deactivation	<b>a</b>	gear direction control
slow/stop	failure to apply on demand	<b>c</b>	service brakes

Table F.5 (continued)

Machine function	Failure type	MPL re-quired	Example of mapped system
engine speed	uncommanded activation	<b>d</b>	throttle
hoe arm extend out	uncommanded activation	<b>c</b>	hoe arm extend out

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex G (normative)

### Large wheel loaders equal to or greater than 24 000 kg performance level tables

#### G.1 Large wheel loaders equal to or greater than 24 000 kg

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables G.1 to G.5](#)) or in [Clause 5](#).

Table G.1 — MPL<sub>r</sub> table for large wheel loaders equal to or greater than 24 000 kg

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
LW1	machine speed	travel	uncommanded activation	increased stopping distance causing higher than intended speed - off high wall	operator	S3	80 %	18 %	100 %	E2	AC1	AW3	AR3	C0	b	
LW2		travel	uncommanded activation	collision - machine moves forward while stopped waiting	bystander	S3	80 %	5 %	100 %	E1	AC1	AW2	AR3	C1		
LW3		low to ground tool / dozing	uncommanded activation	machine fails to stop when pushing over edge - falls it is machine abuse to perform this task without additional measures in place	operator	S3	90 %	6 %	100 %	E1	AC1	AW2	AR3	C1		
LW13	machine direction	considered to be the same as uncommanded brake activation														c
LW4	boom raise	loading / unloading	uncommanded activation	contact with roof - potential for falling objects	operator	S1	90 %	79 %	100 %	E2	AC1	AW2	AR1	C3	c	

Table G.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
LW5		loading / unloading	uncommanded activation	boom hits truck being loaded	co-worker	S1	90 %	6 %	100 %	E1	AC0	N/A	N/A	C3	
LW6	<b>boom lower</b>	travel	uncommanded activation	Boom contacts ground, digs into ground, lifts front wheels (lost steering). Increased friction with ground, may act as dozer over high wall.	operator	S3	80 %	7 %	100 %	E1	AC1	AW2	AR3	C1	<b>b</b>
LW7		maintenance	uncommanded activation	crushed feet	maintainer	S2	6 %	4 %	75 %	E0	AC0	N/A	N/A	C3	
LW13															
LW16-17	<b>tool dump</b>														
LW4	<b>tool curl</b>														
LW8		loading / unloading	uncommanded deactivation	operator out of cab - run away machine	bystander	S3	90 %	5 %	5 %	E0	AC0	N/A	N/A	C3	<b>c</b>
LW9	<b>hold still</b>	slow speed maneuvering	uncommanded deactivation	operator out of cab - run away machine	bystander	S3	6 %	5 %	50 %	E0	AC0	N/A	N/A	C3	<b>c</b>
LW10		travel	uncommanded activation	drive off high-wall	operator	S3	80 %	36 %	100 %	E2	AC1	AW2	AR2	C2	<b>d</b>
LW11	<b>steering</b>	travel	uncommanded activation	collision	bystander	S3	80 %	50 %	5 %	E1	AC1	AW2	AR0	C3	
LW12	<b>transmission neutralize</b>	loading / unloading	uncommanded deactivation	collision	co-worker	S3	90 %	6 %	5 %	E0	AC1	AW2	AR3	C1	<b>a</b>

Table G.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
LW13	slow/stop	travel	uncommanded activation	machine skids toward high wall	operator	S3	80 %	7 %	100 %	E1	AC1	AW2	AR2	C2	c
LW14		travel	failure to apply on demand	machine goes off high wall	operator	S3	80 %	7 %	100 %	E1	AC1	AW2	AR2	C2	
LW15		low to ground	failure to apply on demand	machine fails to slow when pushing off edge - falls of edge	operator	S3	90 %	5 %	100 %	E1	AC1	AW2	AR2	C2	
LW16	loader auxiliary function	loading / unloading	uncommanded activation	load released, machine drives over the load - bottoms out seat	operator	S1	90 %	34 %	100 %	E2	AC0	N/A	N/A	C3	c
LW17		loading / unloading	uncommanded activation	load leaves machine hits pedestrian	bystander	S3	90 %	1 %	5 %	E0	AC0	N/A	N/A	C3	
	loader coupler	no single failure hazardous													
RD13	powered access	same as rigid frame trucks													

## G.2 Supporting explanation

### G.2.1 Supporting explanations for dominant scenarios

#### LW1 – machine speed

H: On haul road, up to 80 % of time (block handling), high wall present up to 90 % of time, downhill 25 % (uphill not going fast enough for hazard to occur).  $H = 80 \% \times 90 \% \times 25 \% = 18 \%$

P: Operator is always in cab for this use case.  $P = 100 \%$

AC: AC1 – brakes

AW: AW3 – Machine speed increases slowly – operator becomes aware before hazardous

AR: AR3 – Applying brakes is a natural reaction and applying brake while in operation is considered underfoot

#### LW2 – machine speed

H: Could be stopping to wait up to 5 % of the time.  $H = 5 \%$

P: Stopped by definition of waiting.  $P = 100 \%$

AC: AC1 – brakes

AW: AW2

AR: AR2

#### LW3 – machine speed

H: Only a hazard for last 1/8 or forward portion of cycle. 90 % idle factor.  $H = (50 \% \times 90 \%) / 8 = 6 \%$

P: Operator is always in cab for this use case.  $P = 100 \%$

AC: AC1 – brakes

AW: AW2

AR: AR2

#### LW4 – boom raise

H: Whenever machine is not idle and not already raising boom (all but A1, A2 and C2). 90 % idle factor.  $H = 90 \% \times (1 - (25 \% / 4) - (25 \% / 8) - (25 \% / 8)) = 79 \%$

P: Operator is always in cab for this use case.  $P = 100 \%$

AC: AC1 – key switch

AW: AW2

AR: AR1 – Turning machine off requires moving hand and is not a natural response

#### LW5 – boom lower

H: Only applicable during unloading (25 %/4), 90 % idle factor.  $H = (25 \% / 4) \times 90 \% = 6 \%$

P: Co-worker always in truck for this use case.  $P = 100 \%$

AC: AC0

#### LW6 – boom lower

H: Percentage of time machine travels with bucket / forks flat / loading position, downhill 25 % (block carrying), Curve such that machine would head to high wall 40 %, high wall present 90 %, time on haul road 80 % (block carrying).  $H = 25 \% \times 40 \% \times 90 \% \times 80 \% = 7 \%$

P: Operator is always in cab for this use case.  $P = 100 \%$

AC: AC1 – key switch

AW: AW2

AR: AR3 – brakes (lost drive torque would rapidly stop machine), tilt bucket back

LW7 – boom lower

H: All tasks boom should be on ground except troubleshooting.  $H = 4 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

LW8 – hold still

H: Reduced maximum idle time by 90 % to account for the times the operator does not put work tool on ground – only when stopped with load in bucket.  $H = 5 \%$

P: Light vehicle traffic rate.  $P = 5 \%$

AC: AC0

LW9 – hold still

H: Reduced maximum idle time by 90 % to account for the times the operator does not put work tool on ground – only when stopped with load in bucket.  $H = 5 \%$

P: Light vehicle traffic rate in park up / central area.  $P = 50 \%$

AC: AC0

LW10 – steering

H: Percentage of failures in dangerous direction 50 %, high wall present 90 %, time on haul road (block handling) 80 %.  $H = 50 \% \times 90 \% \times 80 \% = 36 \%$

P: Operator always in cab for this use case.  $P = 100 \%$

AC: AC1 – berm

AW: AW2

AR: AR2 – Berm is not always effective

LW11 – steering

H: Failures only hazardous in one direction.  $H = 50 \%$

P: Light vehicle traffic rate.  $P = 5 \%$

AC: AC1 – brakes

AW: AW2

AR: AR0

LW12 – transmission neutralize

H: Only applicable in unloading, 90 % idle factor.  $H = (25 \% / 4) \times 90 \% = 6 \%$

P: Based on being material handled, co-worker doing this task would not position themselves in hazard zone. This is supported by the limited visibility it is not practical for them to be in that area (immediately in front of or behind the machine).  $P = 5 \%$

AC: AC1 – brakes

AW: AW2

AR: AR3

#### LW13 – slow/stop

H: On haul road up to 80 % of time (block handling), High wall present up to 90 % of time, downhill 25 % (uphill not going fast enough for hazard to occur), on curve such that machine will head towards hazard 40 %.  $H = 80 \% \times 90 \% \times 25 \% \times 40 \% = 7 \%$

P: Operator always in cab for this use case.  $P = 100 \%$

AC: AC1 – berm

AW: AW2

AR: AR2 – Berm is not always effective

#### LW14 – slow/stop

H: On haul road up to 80 % of time (block handling), high wall present up to 90 % of time, downhill 25 % (uphill not going fast enough for hazard to occur), on curve such that machine will head towards hazard 40 %.  $H = 80 \% \times 90 \% \times 25 \% \times 40 \% = 7 \%$

P: Operator always in cab for this use case.  $P = 100 \%$

AC: AC1 – park brake (steering may not always help avoiding collision)

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

#### LW15 – slow/stop

H: Last 10 % of the push cycle (50 % of total cycle), 90 % idle factor  $H = 10 \% \times 50 \% \times 90 \% = 5 \%$

P: Operator always in cab for this use case.  $P = 100 \%$

AC: AC1 – park brake

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

#### LW16 – auxiliary flow

H: Only when loaded moving forward - C3, D and A1, 90 % idle factor.  $H = (25 \% + (25 \% / 4) + (25 \% / 4)) \times 0,9 = 34 \%$

P: Operator always in cab for this use case.  $P = 100 \%$

AC: AC0

#### LW17 – auxiliary flow

H: Person guiding the unloading process / machine placing of load on truck. Last 10 % of A1, unloading. 90 % idle factor.  $H = (10 \% \times (25 \% / 4) \times 90 \%) = 1 \%$

P: Based on being material handled, co-worker doing this task would not position themselves in hazard zone. This is supported by the limited visibility, it is not practical for them to be in that area (immediately in front of the machine). P = 5 %

AC: AC0

**G.2.2 Application use cases**

**Table G.2 — Application use case table**

Application	Loading/unloading (forks, hydraulic tools)	Bucket v-cycle (including truck / train loading, hopper)	Travel mode (loaded / unloaded)	Low speed maneuvering / startup / parking	Low to ground tool / dozing	Maintenance (machine running) service repair
Open - surface	90 %	90 %	80 %	6 %	90 %	6 %
Confined	90 %	90 %	80 %	6 %	90 %	6 %

**G.2.3 Maintenance task breakdown**

**Table G.3 — Maintenance task breakdown**

	Time (min/day)	% Maintenance time
daily walk around	10	10
wash camera	4	4
refuel	20	20
oil sampling	4,3	4
GET replacement	1,4	1
wash	4	0
lube / grease	38,3	39
troubleshooting	4,3	4
window wash	10	10
install articulation lock	4	4
brake testing	2	2

**G.2.4 Function dominant failure type matrix**

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

**Table G.4 — Function dominant failure type matrix**

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
acceleration / propel			1		Failure to release on demand is no more dangerous than rate greater than command. Other failure types are less or not hazardous.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

Table G.4 (continued)

Function	Fail- ure to apply on de- mand	Fail- ure to release on de- mand	Uncom- manded activation	Uncom- manded deactivation	Notes
direction control (F / R)	1				Uncommanded activation results in an uncommanded stop (con- sidered under uncommanded slow/stop) primarily before starting to change direction thus has much greater response time and is less hazardous. Failure to apply on demand includes failure to change direction or changing into wrong direction.
neutralize				1	Moving into or staying in N is not considered dangerous. Uncom- manded moving out of N is more dangerous than failing to neutral- ize because of brakes and other systems being available.
boom lift			1		Failure to move boom not considered dangerous. Other failure types are considered less hazardous.
boom lower			1		Failure to move boom not considered dangerous. Other failure types are considered less hazardous.
tool curl			1		Failure to move tool not considered dangerous. Other failure types are considered less hazardous.
tool dump			1		Failure to move tool not considered dangerous. Other failure types are considered less hazardous.
boom float					Considered the same as boom lower
auxiliary flow			1		Other failure types are considered less or not hazardous.
slow/stop	1		1		Other failure types considered under failure to apply on demand are less or not hazardous.
hold still				1	Uncommanded deactivation covers failure on demand. Other fail- ure types are considered less or not hazardous.
steering	1		1		All failure types considered under failure to apply on demand and uncommanded activation

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

### G.2.5 Notes and assumptions

- Assumed that no single failure can cause an uncommanded start.
- For the purpose of this assessment, activation means it starts from zero, deactivation means it goes to zero, changes in rate are covered by other failure types.
- Because bystanders are almost never around these machines the co-worker rows represent co-workers in a machine and the bystander rows consider a co-worker on foot or in a light vehicle.
- For loading / unloading, the travel section is not less than 25 % in each direction.
- Assumed that berms are present and sized appropriately, appropriate traffic controls are in space and roads are built wide enough for anticipated traffic.
- Slow speed manoeuvring includes transport (being loaded and unloaded from a truck).
- For dozing off an edge, recommended practice is to push a rear pile to push a front pile off to limit operator exposure to the high wall edge.
- For maintenance assume appropriate lockouts are in place.
- Maintenance tasks are only those that are reasonably foreseeable that could be done with the engine on.
- Uncommanded direction change, uncommanded slow/stop and uncommanded hold still are considered to be the same hazardous outcome – the machine would stop suddenly without warning to the operator or a person following behind the machine.

### G.3 MPL<sub>r</sub> mapped to SCS table

Table G.5 shows function-based MPL<sub>r</sub> (see Table G.1) mapped to SCS per the results of the MCSSA for a large wheel loader equal to or greater than 24 000 kg. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table G.1 would also be mapped to these MPL<sub>r</sub>.

Table G.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL required	Example of mapped system
machine speed	uncommanded activation	<b>b</b>	throttle and speed gear control
machine direction	uncommanded activation	<b>c</b>	gear direction control
boom raise	uncommanded activation	<b>c</b>	boom raise
boom lower	uncommanded activation	<b>b</b>	boom lower
tool dump	uncommanded activation	<b>c</b>	tool dump
tool curl	uncommanded activation	<b>c</b>	tool curl
hold still	uncommanded deactivation	<b>c</b>	parking brakes
steering	uncommanded activation	<b>d</b>	steering
transmission neutralize	uncommanded deactivation	<b>a</b>	gear direction control
slow/stop	uncommanded activation	<b>c</b>	service brakes
	failure to apply on demand	<b>c</b>	
loader auxiliary function	Uncommanded Activation	<b>c</b>	Loader Auxiliary Function
loader coupler	Multiple failures to be hazardous for known designs in working group	<b>N/A</b>	loader coupler

## Annex H (normative)

### Medium, small and compact wheel loaders less than 24 000 kg performance level tables

#### H.1 Medium, small and compact wheel loaders less than 24 000 kg

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables H.1 to H.4](#)) or in [Clause 5](#).

Table H.1 — MPL<sub>r</sub> table for medium, small and compact wheel loaders less than 24 000 kg

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
WL1	machine speed	loading / unloading	uncommanded activation	increased stopping distance causing higher than intended speed - collision	co-worker	S3	90 %	7 %	20 %	E1	AC1	AW2	AR3	C1	b
WL2		bucket	failure to release on demand	delayed stopping time - collision	co-worker	S3	90 %	36 %	20 %	E1	AC1	AW2	AR3	C1	
WL3		roading / traveling	failure to release on demand	increased stopping distance causing higher than intended speed - collision	bystander	S3	30 %	10 %	100 %	E1	AC1	AW2	AR3	C1	
WL4	machine direction	roading	uncommanded activation	machine stops without command - trailing vehicle or motorcycle collides with machine	bystander	S3	30 %	50 %	5 %	E0	AC0	N/A	N/A	C3	c
WL5		roading	uncommanded activation	machine stops without command - collision with vehicle following	operator	S1	30 %	50 %	100 %	E2	AC0	N/A	N/A	C3	
WL6	boom raise	loading / unloading	uncommanded activation	machine contacts overhead infrastructure	co-worker	S3	90 %	36 %	5 %	E1	AC1	AW1	AR3	C2	c

<sup>a</sup> Auxiliary flow is considered to be the same as large wheel loader. Tines should be tilted back. Machine should not be driven towards people.

This assessment assumes that wheel loaders have mechanical or hydrostatic drive with articulation steering, such that an increase in machine speed would cause an increase in directional velocity. If this is not true, the scoring for steering, machine speed, machine direction and slow/stop for skid steers shall be used.

Table H.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
WL7	boom lower	loading / unloading	uncommanded activation	crushed by protruding load	co-worker	S3	90 %	6 %	1 %	E0	AC0	N/A	N/A	C3	c	
WL8		lifting	uncommanded activation	crushed by protruding load - only part of body under lifted load	co-worker	S2	50 %	11 %	100 %	E1	AC0	N/A	N/A	C3		
WL4-5	tool dump	considered to be the same as machine direction change														c
WL6	tool curl	considered to be the same as boom raise														c
WL8 -9	hold still	failure to apply on demand considered to be the same as large wheel loaders														c
WL4 -5		uncommanded activation considered to be the same as machine direction change														
WL9	steering	roading	uncommanded activation	collision	bystander	S3	30 %	100 %	16 %	E1	AC1	AW2	AR0	C3	d	
LW12	transmission neutralize	considered the same as Large Wheel Loader														a
WL10	slow/stop	loading / unloading	failure to apply on demand	machine fails to stop - collision	co-worker	S3	90 %	10 %	100 %	E1	AC1	AW2	AR2	C2	c	
WL4 -5		uncommanded activation considered to be the same as machine direction change														
WL11		bucket	failure to apply on demand	machine fails to stop - collision	bystander	S3	90 %	90 %	10 %	50 %	E1	AC1	AW2	AR2		C2
WL12		travel	failure to apply on demand	machine fails to stop - collision	bystander	S3	30 %	10 %	100 %	E1	AC1	AW2	AR2	C2		
LW16-17	loader auxiliary function <sup>a</sup>	considered the same as large wheel loader														c
	loader coupler	no single failure hazardous - not a safety function														
<sup>a</sup> Auxiliary flow is considered to be the same as large wheel loader. Tines should be tilted back. Machine should not be driven towards people. This assessment assumes that wheel loaders have mechanical or hydrostatic drive with articulation steering, such that an increase in machine speed would cause an increase in directional velocity. If this is not true, the scoring for steering, machine speed, machine direction and slow/stop for skid steers shall be used.																

## H.2 Supporting explanation

### H.2.1 Supporting explanations for dominant scenarios

#### WL1 – machine speed

H: Only hazardous when trying to stop - last 10 % of A1, A2, C1 and C2. Added 5 % for other times may need to stop. 90 % idle factor.  $H = (((10 \% \times (25 \% \times 25 \% \times 4)) + 5 \%) \times 90 \%) = 7 \%$

P: Time when trying to stop, to avoid hitting person.  $P = 20 \%$

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

#### WL2 – machine speed

H: Only hazardous when in reverse (40 %) – See [Table 4](#). 90 % idle factor  $H = 40 \times 90 \% = 36 \%$

P: Time when trying to stop, to avoid hitting person.  $P = 20 \%$

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

#### WL3 – machine speed

H: Only hazardous when stopping to avoid collision with vehicle or pedestrian.  $H = 10 \%$

P: Bystander present whenever trying to avoid collision.  $P = 100 \%$

AC: AC1 – brakes

AW: AW2

AR: AR3 – Applying brakes is a natural reaction and applying brake during the operation is considered underfoot

#### WL4 – machine direction

H: Hazardous when not stopping or slowing.  $H = 50 \%$

P: Trailing vehicle should be maintaining safe distance but may momentarily be closer.  $P = 5 \%$

AC: AC0

#### WL5 – machine direction

H: Hazardous when not stopping or slowing.  $H = 50 \%$

P: Operator present for during the whole cycle.  $P = 100 \%$

AC: AC0

#### WL6 – boom raise

H: Only hazardous when in reverse (40 %) – better awareness in forward. 90 % idle factor.  $H = 40 \times 90 \% = 36 \%$

P: People should not be close to the machine in tight confines. P = 5 %

AC: AC1 – brakes

AW: AW1 – Operator looking behind machine, not in front

AR: AR3 – Removing foot from throttle would stop boom motion

#### WL7 – boom lower

H: Only applicable during unloading (25 %/4), 90 % idle factor.  $H = (25 \% / 4) \times 90 \% = 6 \%$

P: It is considered machine abuse to be under lifted load but there may not be anywhere else to stand in congested work area. P = 1 %

AC: AC0

#### WL8 – boom lower

H: Only when positioning load (25 %/4), 90 % idle factor.  $H = 2 \times (25 \% / 4) \times 90 \% = 11 \%$

P: Co-worker present for all of this portion of cycle. P = 100 %

AC: AC0

#### WL9 – steering

H: Hazard exists throughout cycle. H = 100 %

P: See [5.2](#). P = 16 %

AC: AC1 - brakes

AW: AW2

AR: AR0

#### WL10 – slow/stop

H: Percentage of time slowing / stopping to avoid hitting pedestrian or vehicle. H = 10 %

P: Co-worker present whenever trying to avoid collision with co-worker. P = 100 %

AC: AC1 – park brake (steering may not always help avoiding collision)

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

#### WL11 – slow/stop

H: Percentage of time slowing / stopping to avoid hitting pedestrian or vehicle. H = 10 %

P: Machine exits work area. See [5.4.3](#). P = 50 %

AC: AC1 – park brake (steering may not always help avoiding collision)

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

#### WL12 – slow/stop

H: Percentage of time slowing / stopping to avoid hitting pedestrian or vehicle. H = 10 %

P: Co-worker present whenever trying to avoid collision with co-worker. P = 100 %

AC: AC1 – park brake (steering may not always help avoiding collision)

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

**H.2.2 Application use cases**

**Table H.2 — Application use case table**

Application	Loading / unloading (forks, hydraulic tools)	Bucket v-cycle (including truck / train loading, hopper)	Roading (loaded / unloaded)	Transport (loading and unloading from trailer)	Lifting	Stockpiling	Low to ground tool / dozing	Maintenance (machine running) service repair
Open - Surface	90 %	90 %	30 %	5 %	25 %	50 %	90 %	3 %
Confined	90 %	90 %	0 %	1 %	5 %	10 %	50 %	3 %

**H.2.3 Maintenance task breakdown**

Maintenance tasks are not found to dominate any scoring.

**H.2.4 Function-dominant failure type matrix**

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

**Table H.3 — Function-dominant failure type matrix**

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine speed		1	1	1	Stopping machine on railroad tracks, under mining wall considered worksite responsibility. Failure to apply on demand is not considered hazardous.
machine direction	1		1		Other failure types are less or not hazardous.
transmission neutralize					Same as large wheel loader
boom raise					Not more dangerous than lower
boom lower			1		Other failure types are less or not hazardous.
tool curl					Not more dangerous than lower
tool dump			1		Other failure types are less or not hazardous.
quick coupler engagement				1	No single failure hazardous
slow/stop	1		1		Other failure types are less or not hazardous or are considered under failure to apply on demand.
hold still	1		1		Other failure types are less or not hazardous.
steering			1		All failure types hazardous and are considered in uncommanded steering.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

**H.2.5 Notes and assumptions**

— Third and fourth function (additional auxiliary hydraulic oil supply function) to be assessed by machine manufacturer as potential tools are risk assessed.

- Ground level shutdowns are not fitted on all manufacturers - excluded from analysis.
- Assumed coupler compliance to ISO 13031.
- Operator is assessed as an operator until they are off the machine completely, then they are considered a bystander or co-worker.
- On lifting use case assume guide ropes are long enough to keep co-worker out of harm's way.
- Assume truck being loaded is stationary, it could be pickup, rigid frame highway or off highway, ADT or semi-trailer.
- It is considered machine abuse for anyone to be standing between loader and rock pile/truck.
- Railroad applications are excluded from this analysis.
- Tool close to ground, stock piling and transport were reviewed and determined not to yield any higher scores than the use cases already assessed.
- Assume greasing can be done without the maintainer getting into the hazard zone.
- Uncommanded direction change, uncommanded slow/stop and uncommanded hold still are considered to be the same hazardous outcome - the machine would stop suddenly without warning to the operator or a person following behind the machine.

### H.3 MPL<sub>r</sub> mapped to SCS table

Table H.4 shows function-based MPL<sub>r</sub> (see Table H.1) mapped to SCS per the results of the MCSSA for a medium, small and compact wheel loader less than 24 000 kg. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table H.1 would also be mapped to these MPL<sub>r</sub>.

Table H.4 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
machine speed	uncommanded activation	<b>b</b>	throttle and speed gear control
	failure to release on demand		
machine direction	uncommanded activation	<b>c</b>	gear direction control
boom raise	uncommanded activation	<b>c</b>	boom raise
boom lower	uncommanded activation	<b>c</b>	boom lower
tool dump	uncommanded activation	<b>c</b>	tool dump
tool curl	uncommanded activation	<b>c</b>	tool curl
hold still	failure to apply on demand	<b>c</b>	parking brakes
	uncommanded activation		
steering	uncommanded activation	<b>d</b>	steering
transmission neu-tralize	uncommanded deactivation	<b>a</b>	gear direction control
slow/stop	failure to apply on demand	<b>c</b>	service brakes
	uncommanded activation		
loader auxiliary function	uncommanded activation	<b>c</b>	loader auxiliary function
loader coupler	multiple failures to be hazardous for known designs in working group	<b>N/A</b>	loader coupler

## Annex I (normative)

### Wheeled and crawler skid steer loaders performance level tables

#### I.1 Wheeled and crawler skid steer loaders

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables I.1 to I.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table I.1 — MPL<sub>r</sub> table for wheeled and crawler skid steer loaders

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
SSL7-8	machine propel <sup>a</sup> (speed, direction, steer)														c
	engine speed														
SSL1	boom raise	maintenance	uncommanded activation	boom raises while accessing / egressing the machine	operator	S3	2 %	25 %	100 %	E0	AC0	N/A	N/A	C3	c
SSL2	boom lower	loading / unloading	uncommanded activation	boom lowers while accessing / egressing the machine	operator	S3	2 %	25 %	1 %	E0	AC0	N/A	N/A	C3	c
SSL3	tool dump	loading / unloading	uncommanded activation	load dumped on co-worker - whole body would not be under load	co-worker	S2	50 %	54 %	15 %	E1	AC0	N/A	N/A	C3	c
SSL4	tool curl	low to ground	uncommanded activation	trencher raises out of ground - co-worker gets caught in chain	co-worker	S3	75 %	20 %	5 %	E0	AC1	AW2	AR1	C3	c

This assessment assumes that skid steers have differential drive, such that an increase in machine speed would cause a machine to turn, not increase in directional velocity. If this is not true, the scoring for steering, machine speed, machine direction and slow/stop for wheel loaders shall be used.

Table I.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
SSL5	<b>hold still</b>	bucket work	failure to apply on demand	machine rolls away (creeps away)	co-worker	S3	50 %	50 %	20 %	E1	AC1	AW3	AR3	C0	<b>a</b>
SSL6		low to ground	failure to apply on demand	machine rolls away (creeps away)	co-worker	S3	90 %	50 %	5 %	E1	AC1	AW3	AR3	C0	
	<b>function map change</b>	considered to be the same as whatever functions are being switched													
	<b>offboard power supply</b>	no single failure hazardous – not a safety function													
SSL7	<b>slow/stop</b>	bucket work	failure to apply on demand	machine fails to stop - collision	co-worker	S3	50 %	14 %	100 %	E1	AC1	AW2	AR2	C2	<b>c</b>
SSL8		demolition	failure to apply on demand	fails to stop when putting material down shoot or elevator shaft	operator	S3	50 %	1 %	100 %	E0	AC0	N/A	N/A	C3	
SSL9	<b>slow/stop</b>	travel / road-ing	uncommanded activation	machine stops without command - collision with vehicle following	operator	S1	30 %	25 %	100 %	E1	AC0	N/A	N/A	C3	<b>b</b>
SSL10		travel / road-ing	uncommanded activation	machine stops without command - trailing vehicle or motorcycle collides with machine	bystander	S2	30 %	50 %	5 %	E0	AC0	N/A	N/A	C3	

This assessment assumes that skid steers have differential drive, such that an increase in machine speed would cause a machine to turn, not increase in directional velocity. If this is not true, the scoring for steering, machine speed, machine direction and slow/stop for wheel loaders shall be used.

Table I.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person group exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
SSL11	loader auxiliary function	maintenance	uncommanded activation	entanglement in tool	maintainer	S3	5 %	6 %	70 %	E0	AC0	N/A	N/A	C3	c
SSL12		low to ground	uncommanded activation	entanglement in tool	co-worker	S3	75 %	2 %	50 %	E0	AC0	N/A	N/A	C3	
SSL13	loader coupler	off the ground work tool	uncommanded release	auger detaches at ground engagement - spins around and enters cab	operator	S2	25 %	1 %	100 %	E0	AC0	N/A	N/A	C3	b
SSL14		off the ground work tool	uncommanded release	auger detaches at ground engagement - spins around and hits co-worker	co-worker	S2	25 %	1 %	5 %	E0	AC0	N/A	N/A	C3	

This assessment assumes that skid steers have differential drive, such that an increase in machine speed would cause a machine to turn, not increase in directional velocity. If this is not true, the scoring for steering, machine speed, machine direction and slow/stop for wheel loaders shall be used.

## I.2 Supporting explanation

### I.2.1 Supporting explanations for dominant scenarios

#### SSL1 – boom raise

A: Operator gets in or out of the machine 8 times an hour, takes 8 s.  $A = 64 \text{ s} / 3\,600 \text{ s} = 2 \%$

H: Only while passing behind the implement.  $H = 25 \%$

P: Operator always present for this task.  $P = 100 \%$

AC: AC0

#### SSL2 – boom lower

A: Operator gets in or out of the machine 8 times an hour, takes 8 s.  $A = 64 \text{ s} / 3\,600 \text{ s} = 2 \%$

H: Only while passing behind the implement.  $H = 25 \%$

P: It is considered machine abuse to enter/exit the machine with the boom up without having it supported – would only be during emergency situations.  $P = 1 \%$

AC: AC0

#### SSL3 – tool dump

H: Short cycle worst case, portion "A" - if loading by hand or D if emptying by hand. Could be up to 60 %. 90 % idle factor.  $H = 54 \%$

P: Person would only be present when loading or emptying bucket.  $P = 15 \%$

AC: AC0

#### SSL4 – tool curl

H: Anytime trencher is in the ground (90 %), could be using a trencher up to 25 % - would get dedicated trencher in for more than that. 90 % idle factor.  $H = 90 \% \times 25 \% \times 90 \% = 20 \%$

P: People should not be in the area but may momentarily be while checking.  $P = 5 \%$

AC: AC1 – Turn machine off

AW: AW2

AR: AR1 – Shutting machine down may not be a natural reaction

#### SSL5 – hold still

H: Maximum idle time (50 %).  $H = 50 \%$

P: Person standing around the machine during landscaping.  $P = 20 \%$

AC: AC1 – Turn machine off

AW: AW3 – Operator would detect creep while exiting the machine

AR: AR3 – Tool should be on the ground

#### SSL6 – hold still

H: Maximum idle time (50 %).  $H = 50 \%$

P: Person standing around the machine during snow removal.  $P = 20 \%$

AC: AC1 – Turn machine off

AW: AW3 – Operator would detect creep while exiting the machine

AR: AR3 – Tool should be on the ground

SSL7 – slow/stop

H × P: Hazardous during all of A and D. 10 % of other segments. P at A is 60 %. P at D is 1 %. 90 % idle factor.  $H \times P = [(12,5 \% \times 60 \%) + (12,5 \% \times 1 \%) + (75 \% \times 10 \%) ] \times 90 \% = 14 \%$

AC: AC1 – park brake (steering may not always help avoiding collision)

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

SSL8 – slow/stop

H: Last 1/8th of D. Idle factor 90 %.  $H = (1/8 \times 1/8) \times 90 \% = 1 \%$

P: Operator always present for this task. P = 100 %

AC: AC1 – park brake (steering may not always help avoiding collision)

AW: AW2

AR: AR2 – Operator needs to move hand to activate but is a natural response

SSL9 – slow/stop

H: Only hazardous when car following. H = 25 %

P: Operator present for during the whole cycle. P = 100 %

AC: AC0

SSL10 – slow/stop

H: Hazardous when not stopping or slowing. H = 50 %

P: Trailing vehicle should be maintaining a safe distance but may momentarily be closer. P = 5 %

AC: AC0

SSL11 – auxiliary flow

H: 10 % of daily inspection, 10 % washing, 10 % of windows / camera / mirror clean and all of troubleshooting and refill window washer.  $H = (10 \% \times 22 \%) + (10 \% \times 1 \%) + (10 \% \times 22 \%) + 1 \% + 1 \% = 6 \%$

P: See 5.8. Maintainer is on machine for 70 % of the task on the smaller machine. P = 70 %.

AC: AC0

SSL12 – auxiliary flow

H: Only hazardous when tool is not in the ground / rotating parts exposed and not being used or hooking tool up (5 %). 90 % idle factor. Tool could be used up to 5 % of time.  $H = 5 \% \times 90 \% \times 5 \% = 2 \%$

P: Could be guiding tool to work point engagement up to 50 % of the time. P = 50 %

AC: AC0

SSL13 – coupler engagement

H: Only during auger engagement with ground and first few inches (15 %). 90 % idle factor. Tool used up to (5 %).  $H = 15 \% \times 90 \% \times 5 \% = 1 \%$

P: Operator present throughout cycle.  $P = 100 \%$

AC: AC0

SSL14 – coupler engagement

H: Only during auger engagement with ground and first few inches (15 %). 90 % idle factor. Tool used up to (5 %).  $H = 15 \% \times 90 \% \times 5 \% = 1 \%$

P: Should not be that close, but may be momentarily to remove spoil, etc.  $P = 5 \%$

AC: AC0

I.2.2 Application use cases

Table I.2 — Application use case table

Application	Travel	Bucket work (e.g. v-cycle, truckloading)	Low to ground work tool	Material handling (e.g. forks, grapple)	Off the ground work tool	Power supply (operator not in cab)	Transport	Maintenance
Construction	10 %	50 %	75 %	20 %	25 %	5 %	10 %	5 %
Landscaping	20 %	50 %	75 %	30 %	15 %	2 %	10 %	5 %
Civil (snow removal, street sweeping)	30 %	50 %	90 %	5 %	5 %	2 %	10 %	5 %
Agriculture	30 %	50 %	5 %	50 %	5 %	2 %	2 %	5 %
Industrial (waste, conveyer clean-up, factory)	10 %	60 %	25 %	25 %	5 %	5 %	2 %	5 %
Demolition	10 %	50 %	30 %	50 %	50 %	2 %	5 %	5 %
Forestry	30 %	10 %	10 %	20 %	90 %	2 %	10 %	5 %

I.2.3 Maintenance task breakdown

Table I.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
daily inspection	5,0	22 %
refuel / DEF	2,0	9 %
lube / greasing	2,0	9 %
tire pressure check / top up / track tension	2,0	9 %
wash	0,3	1 %
oil sample	0,5	2 %
clean windows and mirrors, cameras	5,0	22 %
troubleshooting	1,0	1 %
clean cooling package (waste application)	4,0	17 %
refill window washer	0,1	1 %
flash / calibrations	1,0	1 %

### I.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

**Table I.4 — Function dominant failure type matrix**

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine propel (direction, steering, speed)		1	1		Other failure types are less or not hazardous.
engine speed			1		Other failure types are less or not hazardous.
boom raise			1		Other failure types are less or not hazardous.
boom lower			1		Other failure types are less or not hazardous.
tool dump			1		Other failure types are less or not hazardous.
tool curl			1		Other failure types are less or not hazardous.
auxiliary flow			1		Other failure types are less or not hazardous.
quick coupler engagement				1	Other failure types are less or not hazardous.
slow/stop	1		1		Other failure types are less or not hazardous.
hold still	1				Failure on demand and uncommanded release are considered the same. Other failure types are less or not hazardous.
shutdown	1				Not a hazard
off board power supply			1		Other failure types are less or not hazardous.
function map change			1		Considered the same as the failure type the function controls
NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.					

### I.2.5 Notes and assumptions

- This assessment does not consider the hazards unique to single boom or telescopic boom skid steer machines.
- For skid steer machines propel covers direction control (L, R, F, R) and engine speed as control magnitude.
- Considered tool change and found it to be very similar, but no worse than hazards associated with accessing and egressing the cab (S, E and C).
- Uncommanded direction change, uncommanded slow/stop and uncommanded hold still are considered to be the same hazardous outcome – the machine would stop suddenly without warning to the operator or a person following behind the machine.
- Uncommanded slow/stop hazards have been scored lower than other machines due to the lower speeds (less than 20 km/h), smaller size and different geometry.
- Considered the hazard of boom raise while operator and maintainer are accessing machine together.

### I.3 MPL<sub>r</sub> mapped to SCS table

Table I.5 shows function-based MPL<sub>r</sub> (see Table I.1) mapped to SCS per the results of the MCSSA for a wheeled or crawler skid steer loader. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table I.1 would also be mapped to these MPL<sub>r</sub>.

Table I.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
machine propel (speed, direction, steer)	uncommanded activation	<b>c</b>	propel
engine speed	multiple failures to be hazardous	<b>N/A</b>	throttle
boom raise	uncommanded activation	<b>c</b>	boom raise
boom lower	uncommanded activation	<b>c</b>	boom lower
tool dump	uncommanded activation	<b>c</b>	tool dump
tool curl	uncommanded activation	<b>c</b>	tool curl
hold still	failure to apply on demand	<b>a</b>	parking brakes
function map change	considered to be the same as whatever functions are being switched		function map change
slow/stop	failure to apply on demand	<b>c</b>	service brakes
	uncommanded activation	<b>b</b>	
loader auxiliary function	uncommanded activation	<b>c</b>	loader auxiliary function
loader coupler	uncommanded release	<b>b</b>	loader coupler
offboard power supply	multiple failures to be dangerous	<b>N/A</b>	offboard power supply

## Annex J (normative)

### Landfill compactor performance level tables

#### J.1 Landfill compactors

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables J.1 to J.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table J.1 — MPL<sub>r</sub> table for landfill compactors

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
C01	machine speed	compaction	uncommanded activation	machine overshoots intended compaction path - collision - hystat	bystander	S3	90 %	9 %	5 %	E0	AC0	N/A	N/A	C3	c
C01	engine speed														c
C01	machine direction														c
C01	neutralize transmission														c
C02	blade lower	maintenance	uncommanded activation	crushed foot	maintainer	S2	5 %	10 %	75 %	E0	AC0	N/A	N/A	C3	b
C02	blade raise														b
C02	blade tilt right / left														b
C03	slow/stop	compaction	failure to apply on demand	machine overshoots intended compaction path - collision	co-worker	S3	90 %	9 %	5 %	E0	AC1	AW2	AR2	C2	b
C04		travel	failure to apply on demand	machine fails to stop - collision	co-worker	S3	15 %	9 %	25 %	E0	AC1	AW2	AR2	C2	
C05	hold still	slow speed maneuvering	failure to apply on demand	machine rolls away - collision	co-worker	S3	5 %	75 %	25 %	E0	AC0	N/A	N/A	C3	c

Table J.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
C06	steering	travel	uncommanded activation	crosses onto other side of access road	co-worker	S3	15 %	50 %	5 %	E0	AC0	N/A	N/A	C3	c
C07		maintenance	uncommanded activation	crushed in articulation zone	maintainer	S3	5 %	8 %	75 %	E0	AC0	N/A	N/A	C3	

## J.2 Supporting explanation

### J.2.1 Supporting explanations for dominant scenarios

#### C01 – machine speed

H: Only hazardous at the points where preparing to change direction or stop – 10 %. 90 % idle factor.  $H = (10 \% \times 90 \%) = 9 \%$

P: Rare for people to be in the area.  $P = 5 \%$

AC: AC0

#### C02 – blade lower

H: 10 % of wash, 10 % of walk around, 75 % grease, 100 % troubleshoot.  $H = (10 \% \times 14 \%) + (10 \% \times 24 \%) + (75 \% \times 5 \%) + 2 \% = 10 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### C03 – slow/stop

H: Only hazardous at the points where preparing to change direction or stop – 10 %. 90 % idle factor.  $H = (10 \% \times 90 \%) = 9 \%$

P: Rare for people to be in the area.  $P = 5 \%$

AC: AC1 – parking brake

AW: AW2

AR: AR2

#### C04 – slow/stop

H: Only hazardous at the points where preparing to change direction or stop – 10 %. 90 % idle factor.  $H = (10 \% \times 90 \%) = 9 \%$

P: Typical bystander rate in central / parking areas.  $P = 25 \%$

AC: AC1 – parking brake

AW: AW2

AR: AR2

#### C05 – hold still

H: Machine could be idle up to 75 % of the time

P: Typical bystander rate in central / parking areas.  $P = 25 \%$

AC: AC0

#### C06 – steering

H: Only hazardous in one direction – 50 %

P: Not normally travelling on access road.  $P = 5 \%$

AC: AC0

#### C07 – steering

H: 10 % of refuel, 10 % walk around, and all of articulation lock install.  $H = (10 \% \times 36 \%) + (10 \% \times 24 \%) + 2 \% = 8 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

### J.2.2 Application use cases

Table J.2 — Application use case table

Application	Compaction	Travel	Slow speed manoeuvring	Dozing	Maintenance
Landfill compaction	90 %	15 %	5 %	25 %	5 %
Soil rolling	90 %	15 %	5 %	20 %	5 %

### J.2.3 Maintenance task breakdown

Table J.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
wash	6,0	14 %
refuel	15,0	36 %
daily inspection	10,0	24 %
camera clean	3,0	7 %
oil sample	3,0	7 %
grease	2,0	5 %
troubleshooting	1,0	2 %
window wash	1,0	2 %
articulation lock install	1,0	2 %

### J.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table J.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine speed			1		Other failure types are less or not hazardous.
machine direction	1				Other failure types are less or not hazardous.
engine speed			1		Other failure types are less or not hazardous.
neutralize transmission	1				Other failure types are less or not hazardous.
blade lower			1		Other failure types are less or not hazardous.
slow/stop	1		1		Other failure types are less or not hazardous.
hold still	1				Other failure types are less or not hazardous.
steering			1		Other failure types are less or not hazardous.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

### J.2.5 Notes and assumptions

- Not all machines are fitted with blades or vibration systems.
- Machines without ROPS need to be reassessed and change severity to S3 if a failure could cause a roll over.
- If blades have pitch adjustment it is considered the same as blade lower.
- Machines have low travel speed and can stop quickly, however steering was scored as an AC0 because the operator may not always be able to stop in time.
- For machine speed in compaction with hystat and e-stop fitted (no CCF with propel system)  $MPL_r = b$  (AC1, AW2, AR2).
- Wheel dozers have the same  $MPL_r$  as WL for brakes, steering and propulsion and dozers for implement.
- Machine may not have e-stop.

### J.3 $MPL_r$ mapped to SCS table

Table J.5 shows function-based  $MPL_r$  (see Table J.1) mapped to SCS per the results of the MCSSA for a landfill compactor. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table J.1 would also be mapped to these  $MPL_r$ .

Table J.5 —  $MPL_r$  mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
machine speed	uncommanded activation	c	propel
engine speed	uncommanded activation	c	throttle
machine direction	failure to apply on demand	c	gear direction control
neutralize transmission	failure to apply on demand	c	gear direction control
blade lower	uncommanded activation	b	blade lower
blade raise	uncommanded activation	b	blade raise
blade tilt left / right	uncommanded activation	b	blade tilt left / right
slow/stop	failure to apply on demand	b	service brakes
hold still	failure to apply on demand	c	parking brakes
steering	uncommanded activation	c	steering

## Annex K (normative)

### Roller performance level tables

#### K.1 Rollers

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables K.1](#) to [K.5](#)) or in [Clause 5](#).

Table K.1 — MPL<sub>r</sub> table for rollers

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
RL1	edge cutter up / down	maintenance	uncommanded activation	severed toes	maintainer	S2	5 %	4 %	70 %	E0	AC0	N/A	N/A	C3	b	
RL2	E-stop	compacting	failure to apply on demand	Only used in emergency situations. used worst severity for all scenarios	co-worker	S3	95 %	1 %	100 %	E0	AC0	N/A	N/A	C3	c	
RL3	hold still	compacting	failure to apply on demand	machine rolls away - runs over someone	co-worker	S3	95 %	17 %	10 %	E1	AC1	AW2	AR2	C2	c	
RL4		compacting	failure to apply on demand	machine rolls away - runs over someone	co-worker	S3	95 %	17 %	50 %	E1	AC1	AW2	AR2	C2		
RL5		maintenance	failure to apply on demand	run over	maintainer	S3	5 %	43 %	70 %	E1	AC1	AW2	AR2	C2		
RL6-7	machine direction	considered to be the same as machine speed														b
RL6	machine speed	compacting	uncommanded activation	machine overshoots intended direction or stopping point and runs someone over	co-worker	S3	95 %	9 %	10 %	E0	AC1	AW2	AR2	C2	b	
RL7		compacting	uncommanded activation	machine overshoots intended direction change or stopping point and runs over someone's limb - smaller machine	co-worker	S2	95 %	9 %	50 %	E1	AC1	AW2	AR2	C2		

Table K.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
RL6-7	engine speed														b
RL6-7	slow/stop														b
RL8	steering	compacting	uncommanded activation	machine steers into traffic	co-worker	S3	95 %	90 %	16 %	E2	AC1	AW2	AR3	C1	c
RL9		compacting	uncommanded activation	machine steers into traffic	operator	S3	95 %	90 %	100 %	E2	AC1	AW2	AR3	C1	
RL10		compacting	uncommanded activation	machine steers into traffic	co-worker	S3	95 %	90 %	16 %	E2	AC1	AW2	AR3	C1	
RL11		maintenance	uncommanded activation	crushed in hitch	maintainer	S3	5 %	9 %	70 %	E0	AC0	N/A	N/A	C3	
RL12		travel	uncommanded activation	crosses onto other side of access road	co-worker	S3	10 %	50 %	5 %	E0	AC0	N/A	N/A	C3	

## K.2 Supporting explanation

### K.2.1 Supporting explanations for dominant scenarios

RL1 – edge cutter up / down

H: 5 % of wash, 5 % of walk around, and 100 % troubleshoot.  $H = (5 \% \times 3 \%) + (5 \% \times 15 \%) + 3 \%$   
 $= 4 \%$

P: See 5.5. Maintainer on machine for 70 % of task on smaller machine.  $P = 70 \%$ .

AC: AC0

RL2 – E-stop

H: Only used in emergencies.  $H = 1 \%$

P: Always present during an emergency.  $P = 100 \%$

AC: AC0

RL3 – hold still

H: Maximum idle time (25 %), machine left on grade where it could roll (2/3).  $H = (2/3) \times 25 \% = 17 \%$

P: Only hazardous at this severity for pedestrians in area.  $P = 10 \%$

AC: AC1 - E-stop or hydraulic lockout

AW: AW2

AR: AR2 – Operator must move hand to apply E-stop or hydraulic lockout

RL4 – hold still

H: Maximum idle time (25 %), machine left on grade where it could roll (2/3).  $H = (2/3) \times 25 \% = 17 \%$

P: Light vehicle traffic rate in park up / central area.  $P = 50 \%$

AC: AC1 - E-stop or hydraulic lockout

AW: AW2

AR: AR2 – Operator must move hand to apply E-stop or hydraulic lockout

RL5 – hold still

H: 33 % wash, 10 % refuel, 33 % walk around, 90 % of grease, 10 % of window wash, all of camera clean, oil sample, troubleshoot, tire check, and articulation lock install.  $H = (33 \% \times 3 \%) + (10 \% \times 44 \%) + (33 \% \times 15 \%) + (90 \% \times 3 \%) + (10 \% \times 6 \%) + 6 \% + 3 \% + 3 \% = 43 \%$

P: See 5.8. Maintainer on machine for 70 % of task on smaller machine.  $P = 70 \%$ .

AC: AC1 - E-stop or hydraulic lockout

AW: AW2

AR: AR2 – Operator must move hand to apply e-stop or hydraulic lockout

RL6 – machine speed

H: Only hazardous at the points where preparing to change direction or stop - 10 %. 90 % idle factor.  $H = (10 \% \times 90 \%) = 9 \%$

P: Only hazardous at this severity for pedestrians in the area.  $P = 10 \%$

AC: AC1 – E-stop

AW: AW2

AR: AR2

#### RL7 – machine speed

H: Only hazardous at the points where preparing to change direction or stop - 10 %. 90 % idle factor.  $H = (10 \% \times 90 \%) = 9 \%$

P: People working on paver.  $P = 50 \%$

AC: AC1 – E-stop

AW: AW2

AR: AR2

#### RL8 – steering

H: 90 % idle factor

P: See [5.2](#).  $P = 16 \%$

AC: AC1 – Remove propel command - slow machine speed allows reaction

AW: AW2

AR: AR3

#### RL9 – steering

H: 90 % idle factor

P: Always present during an emergency.  $P = 100 \%$

AC: AC1 – Remove propel command - slow machine speed allows reaction

AW: AW2

AR: AR3

#### RL10 – steering

H: 90 % idle factor

P: See [5.2](#).  $P = 16 \%$

AC: AC1 – Remove propel command - slow machine speed allows reaction

AW: AW2

AR: AR3

#### RL11 – steering

H: 10 % of refuel, 10 % walk around, all of articulation lock install.  $H = (10 \% \times 44 \%) + (10 \% \times 15 \%) + 3 \% = 9 \%$

P: See 5.5. Maintainer on machine for 70 % of task on smaller machine. P = 70 %.

AC: AC0

RL12 – steering

H: Only hazardous in one direction – 50 %

P: Not normally travelling on access road. P = 5 %

AC: AC0

**K.2.2 Application use cases**

**Table K.2 — Application use case table**

Application	Travel	Compacting	Maintenance
Single / asphalt roller	10 %	95 %	5 %
Tandem / utility roller	10 %	95 %	5 %
Pneumatic roller	5 %	95 %	5 %

**K.2.3 Maintenance task breakdown**

**Table K.3 — Maintenance task breakdown**

	Time (min/day)	% Maintenance time
wash	1,0	3 %
fuel, water, DEF fill	15,0	44 %
daily inspection	5,0	15 %
camera clean	2,0	6 %
oil sample	1,0	3 %
grease	1,0	3 %
troubleshooting	1,0	3 %
window wash	2,0	6 %
tire check	5,0	15 %
articulation lock install	1,0	3 %

**K.2.4 Function dominant failure type matrix**

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

**Table K.4 — Function dominant failure type matrix**

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine speed			1		Other failure types are less or not hazardous.
NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.					

Table K.4 (continued)

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
machine direction	1				Other failure types are less or not hazardous.
edge cutter up / down			1		Other failure types are less or not hazardous.
slow/stop	1		1		Other failure types are less or not hazardous.
hold still	1				Other failure types are less or not hazardous.
steering			1		Other failure types are less or not hazardous.
E-stop	1				Uncommanded activation considered to be the same as systems it controls
NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.					

### K.2.5 Notes and assumptions

- E-stop is considered only if equipped.
- Transmission neutralize is considered the same as machine direction.

### K.3 MPL<sub>r</sub> mapped to SCS table

Table K.5 shows function-based MPL<sub>r</sub> (see Table K.1) mapped to SCS per the results of the MCSSA for a roller. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table K.1 would also be mapped to these MPL<sub>r</sub>.

Table K.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL required	Example of mapped system
machine speed	uncommanded activation	<b>b</b>	propel
engine speed	uncommanded activation	<b>b</b>	throttle
machine direction	failure to apply on demand	<b>b</b>	gear direction control
edge cutter up / down	uncommanded activation	<b>b</b>	edge cutter up / down
slow/stop	failure to apply on demand	<b>b</b>	service brakes
hold still	failure to apply on demand	<b>c</b>	parking brakes
steering	uncommanded activation	<b>c</b>	steering
e-stop	failure to apply on demand	<b>c</b>	e-stop

## Annex L (normative)

### Grader performance level tables

#### L.1 Graders

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables L.1](#) to [L.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table L.1 — MPL<sub>r</sub> table for graders

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
MG1	articulation	maintenance	uncommanded activation	maintainer crushed in articulation area	maintainer	S3	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	c	
MG2	blade down	maintenance	uncommanded activation	crushed limb under blade	maintainer	S2	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	b	
	blade pitch				Not considered hazardous											N/A
MG3	blade side shift	travel (no work, high speed road-ing, etc.)	uncommanded activation	collision between blade and pedestrian at speed	bystander	S3	30 %	38 %	1 %	E0	AC0	N/A	N/A	C3	c	
MG4	blade up	maintenance	uncommanded activation	blade collides with main-tainer	maintainer	S2	5 %	7 %	75 %	E0	AC0	N/A	N/A	C3	b	
MG5	circle / A-Frame L / R	maintenance	uncommanded activation	collision be-tween circle / A-frame and maintainer	maintainer	S2	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	b	
MG6		travel (no work, high speed road-ing, etc.)	uncommanded activation	collision between blade and pedestri-an at speed	bystander	S3	30 %	38 %	1 %	E0	AC1	AW2	AR2	C2		
MG7	front imple-ment down	maintenance	uncommanded activation	crushed limb under imple-ment	maintainer	S2	5 %	3 %	75 %	E0	AC0	N/A	N/A	C3	b	
MG8	hold still	blading (all types - fine blading, snow wing, high speed blading, shouldering, mid frame scarifier)	failure to apply on demand	machine starts rolling while oper-ator is out of the cab - run over	bystander	S3	80 %	5 %	20 %	E0	AC0	N/A	N/A	C3	c	
MG9	maintenance	maintenance	failure to apply on demand	run over maintainer	maintainer	S3	5 %	55 %	75 %	E1	AC1	AW2	AR2	C2		

Table L.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
MG14		uncommanded activation is considered to be the same as uncommand slow/stop													
MG10	machine direction	blading (all types - fine blading, snow wing, high speed blading, shouldering, mid frame scarifier)	failure to apply on demand	collision when maneuvering	bystander	S3	80 %	5 %	20 %	E0	AC1	AW2	AR3	C1	a
MG11	machine speed	travel (no work, high speed road-ing, etc.)	uncommanded activation	collision due to increased slowing / stopping distance	bystander	S3	30 %	50 %	16 %	E1	AC1	AW2	AR3	C1	b
MG12	ripper down	maintenance	uncommanded activation	crushed limb under ripper	maintainer	S2	5 %	3 %	75 %	E0	AC0	N/A	N/A	C3	b
MG13		travel (no work, high speed road-ing, etc.)	failure to apply on demand	collision - machine fails stop	bystander	S3	30 %	10 %	100 %	E1	AC1	AW2	AR2	C2	c
MG14	slow/stop	travel (no work, high speed road-ing, etc.)	uncommanded activation	machine stops without command causing collision with following vehicle	operator	S1	30 %	50 %	100 %	E2	AC0	N/A	N/A	C3	c
MG15		maintenance	uncommanded activation	crushed by snow wing	maintainer	S3	5 %	6 %	75 %	E0	AC0	N/A	N/A	C3	
MG16	snow wing	travel (no work, high speed road-ing, etc.)	uncommanded activation	collision between snow wing and bystander	bystander	S3	30 %	100 %	2 %	E0	AC0	N/A	N/A	C3	c

Table L.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
MG17	<b>steering left / right</b>	travel (no work, high speed road-ing, etc.)	uncommanded activation	collision	bystander	S3	30 %	100 %	16 %	E1	AC1	AW2	AR0	C3	<b>d</b>
MG18	<b>wheel lean</b>	travel (no work, high speed road-ing, etc.)	uncommanded activation	collision, wheel lean causes slight steering change.	bystander	S3	30 %	100 %	16 %	E1	AC1	AW2	AR3	C1	<b>b</b>
MG19	<b>transmission neutralize</b>	travel (no work, high speed road-ing, etc.)	uncommanded deactivation	machine moves into vehicle or bystander	bystander	S3	30 %	4 %	25 %	E0	AC1	AW2	AR3	C1	<b>a</b>

## L.2 Supporting explanation

### L.2.1 Supporting explanations for dominant scenarios

#### MG1 – articulation

H: 15 % of grease, 5 % of wash, 10 % of windows wash, and all of troubleshooting.  $H = (15 \% \times 14 \%) + (5 \% \times 6 \%) + (10 \% \times 3 \%) + 1 \% = 4 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### MG2 – blade down

H: All cutting edge replace – mid-mount blade, shoe / circle adjustment, troubleshooting, and moldboard wear strip change.  $H = 4 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### MG3 – blade side shift

H: Only when machine is at speed ( $>10$  km/h) (75 %) and only dangerous if it extends in the direction away from tandem and is able to extend past front tires (50 %).  $H = (75 \% \times 50 \%) = 38 \%$

P: Only when pedestrian is present and very close to the machine (10 km/h). It is considered machine abuse to road machine without blade fully rotated to minimize machine width.  $P = 1 \%$

AC: AC0

#### MG4 – blade up

H: 25 % of grease and all of shoe / circle adjustment, troubleshooting, and moldboard wear strip change.  $H = (25 \% \times 14 \%) + 2 \% + 1 \% + 0,2 \% = 7 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### MG5 – circle / A-Frame L / R

H: All of cutting edge replace – mid-mount blade, shoe / circle adjustment, troubleshooting, and moldboard wear strip change.  $H = 0,4 \% + 2,1 \% + 1,4 \% + 0,2 \% = 4 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### MG6 – circle / A-Frame L / R

H: Only when machine is at speed ( $>10$  km/h) (75 %) and only dangerous if it rotates in an outward direction.  $H = (75 \% \times 50 \%) = 38 \%$

P: Only when pedestrian is present and very close to the machine (10 km/h).  $P = 1 \%$

AC: AC1 – Steering

AW: AW2

AR: AR2

#### MG7 – front implement down

H: 20 % of grease and all of cutting edge replace - front blade.  $H = (20 \% \times 14 \%) + 1 \% = 4 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### MG8 – hold still

H: Only hazardous when machine stopped without the blade grounded.  $H = 5 \%$

P: Construction site park up area.  $P = 20 \%$

AC: AC0

#### MG9 – hold still

H: 30 % walk around, 50 % refuel, 25 % window wash, 50 % cutting edge replace - front blade, 50 % ripper teeth - replace, 50 % transmission check, and all of engine check, transmission top up, engine top up, troubleshooting, moldboard wear strip change, grease, wash, add/remove attachments, cutting edge replace – mid-mount blade, and shoe/circle adjust.  $H = (30 \% \times 14,1 \%) + (50 \% \times 14,1 \%) + (25 \% \times 2,8 \%) + (50 \% \times 0,4 \%) + (50 \% \times 0,4 \%) + (50 \% \times 7,1 \%) + 7,1 \% + 0,7 \% + 0,7 \% + 1,4 \% + 0,2 \% + 14,1 \% + 5,7 \% + 6,2 \% + 0,4 \% + 2,1 \% = 55 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1

AW: AW2

AR: AR2 - It is considered machine abuse to not ground implements

#### MG10 – machine direction

H: Only when in tight confines (50 %) and when stopping (10 %).  $H = (50 \% \times 10 \%) = 5 \%$

P: Construction site park up area.  $P = 20 \%$

AC: AC1 – brakes

AW: AW2

AR: AR3

#### MG11 – machine speed

H: Slowing down up to 50 % of time.  $H = 50 \%$

P: Traffic rate.  $P = 16 \%$

AC: AC1 – brakes

AW: AW2

AR: AR3

#### MG12 – ripper down

H: 20 % of grease and all of ripper teeth - replace.  $H = (20 \% \times 14 \%) + 0,4 \% = 3 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### MG13 – slow/stop

## ISO/TS 19014-5:2021(E)

H: Only when slowing or stopping to avoid hitting someone. H = 10 %

P: Always present during an emergency. P = 100 %

AC: AC1 – park brake

AW: AW2

AR: AR2

### MG14 – slow/stop

H: Only hazardous when machine not slowing down. H = 50 %

P: Operator present throughout the cycle. P = 100 %

AC: AC0

### MG15 – snow wing

H: All of add / remove attachments. H = 6 %

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

### MG16 – snow wing

H: Any point when traveling with snow wing up. H = 100 %

P: Only when person is beside road (rare in snow) 1 % or machine in over taking or turning lane while vehicle is in regular lane (rare) 1 %. P = 2 %

AC: AC0

### MG17 – steering left / right

H: Hazard exists during the whole cycle. H = 100 %

P: See [5.2](#). P = 16 %

AC: AC1

AW: AW2

AR: AR0

### MG18 – wheel lean

H: Hazard exists during the whole cycle. H = 100 %

P: See [5.2](#). P = 16 %

AC: AC1 – steering

AW: AW2

AR: AR3

### MG19 - transmission neutralize

H: Time when machine is idle while waiting (20 %) during portion of travel that is low speed manoeuvring (1/5). H = 20 % × 1/5 = 4 %

P: Typical bystander rate in central / parking areas. P = 25 %.

AC: AC1 – brakes

AW: AW2

AR: AR3 – The brakes would be under foot

## L.2.2 Application use cases

Table L.2 — Application use case table

Application	Travel (no work, high speed roading, etc.)	Blading (all types - fine blading, snow wing, high speed blading, shouldering, mid frame scarifier)	Ripping	Maintenance
Construction	5 %	80 %	20 %	5 %
Road maintenance	30 %	80 %	10 %	5 %
Mining	10 %	80 %	20 %	5 %

## L.2.3 Maintenance task breakdown

Table L.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
daily inspection	10,0	28,3 %
grease	5,0	14,1 %
refuel	5,0	14,1 %
wash	2,0	5,7 %
window wash	1,0	2,8 %
add / remove attachments	2,2	6,2 %
park brake test	2,0	5,7 %
cutting edge replace - mid-mount blade	0,1	0,4 %
cutting edge replace - front blade	0,1	0,4 %
ripper teeth replace	0,1	0,4 %
shoe / circle adjustment	0,7	2,1 %
transmission oil check	2,5	7,1 %
engine oil check	2,5	7,1 %
transmission oil fill	0,3	0,7 %
engine oil fill	0,3	0,7 %
troubleshooting	0,5	1,4 %
moldboard wear strip change	0,1	0,2 %
flash / calibration	1,0	2,8 %

## L.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

**Table L.4 — Function dominant failure type matrix**

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
slow/stop	1		1		Uncommanded release no worse than failure to apply on demand
hold still	1				Uncommanded release no worse than failure to apply on demand
steering left / right			1		Failure on demand same as uncommanded steering
blade up			1		Other failure types are less or not hazardous.
blade down			1		Other failure types are less or not hazardous.
blade side shift			1		Other failure types are less or not hazardous.
blade pitch			1		Other failure types are less or not hazardous.
circle / A-Frame L / R			1		Other failure types are less or not hazardous.
circle pitch			1		Other failure types are less or not hazardous.
articulation			1		Other failure types are less or not hazardous.
wheel lean			1		Other failure types are less or not hazardous.
snow wing			1		Other failure types are less or not hazardous.
ripper up			1		Ripper up is not considered hazardous
ripper down			1		Other failure types are less or not hazardous.
front implement up			1		Other failure types are less or not hazardous.
front implement down			1		Other failure types are less or not hazardous.
machine speed			1		Failure to release on demand considered the same as uncommanded application
machine direction	1				Uncommanded application considered same as uncommanded slow/stop
transmission neutralize				1	Shifting out of neutral without command

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

**L.2.5 Notes and assumptions**

- Road maintenance has little to no site management.
- Towing a camper / attachment is included in other use cases.
- Co-worker is someone in similar or larger machine / vehicle.
- Bystander is a pedestrian or light vehicle.
- Where mining has lower score, only applies to large purpose built (weight greater than 60 000 kg.) graders that are not used in other applications. All smaller motor graders are considered to be used in other applications.

**L.3 MPL<sub>r</sub> mapped to SCS table**

Table L.5 shows function-based MPL<sub>r</sub> (see Table L.1) mapped to SCS per the results of the MCSSA for a grader. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table L.1 would also be mapped to these MPL<sub>r</sub>.

**Table L.5 — MPL<sub>r</sub> mapped to SCS**

Machine function	Failure type	MPL required	Example of mapped system
articulation	uncommanded activation	<b>c</b>	articulation
blade down	uncommanded activation	<b>b</b>	blade down

Table L.5 (continued)

Machine function	Failure type	MPL required	Example of mapped system
blade side shift	uncommanded activation	c	blade side shift
blade pitch	no hazard	N/A	blade pitch
blade up	uncommanded activation	b	blade up
circle / A-frame - left / right	uncommanded activation	b	centre shift
front implement down	uncommanded activation	b	front implement down
hold still	failure to apply on demand	c	parking brake
machine direction	uncommanded activation	c	gear direction control
	failure to apply on demand	a	
machine speed	uncommanded activation	b	propel
ripper down	uncommanded activation	b	ripper down
slow/stop	failure to apply on demand	c	service brakes
	uncommanded activation	b	
snow wing	uncommanded activation	c	snow wing
steering left / right	uncommanded activation	d	steering
	failure to apply on demand	d	
wheel lean	uncommanded activation	b	wheel lean
transmission neutralize	uncommanded deactivation	a	gear direction control

## Annex M (normative)

### Crawler dozer performance level tables

#### M.1 Crawler dozers

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables M.1](#) to [M.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table M.1 — MPL<sub>r</sub> table for crawler dozers

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
TT1	blade angle	pushing dirt	uncommanded activation	Pinched between machine and blade	bystander	S2	95 %	60 %	1 %	E0	AC0	N/A	N/A	C3	b
TT2		maintenance	uncommanded activation	crush injury	maintainer	S2	5 %	0 %	75 %	E0	AC0	N/A	N/A	C3	
TT1-2	blade tilt-R	considered to be the same as blade angle - it is considered machine abuse to be under unblocked blade													
N/A	blade pitch	Not considered hazardous													
TT3	blade down	maintenance	uncommanded activation	Bumped by moving push arms	maintainer	S1	5 %	0 %	100 %	E0	AC0	N/A	N/A	C3	a
TT4	e-stop	Considered to be the same as hold still when pushing dirt													
TT4	hold still	pushing dirt	failure to apply on demand	Machine moves when accessing machine	operator	S3	95 %	60 %	1 %	E0	AC1	AW1	AR2	C3	c
TT5		drawbar	failure to apply on demand	Machine moves when attaching implement	bystander	S3	90 %	1 %	1 %	E0	AC1	AW1	AR2	C3	
TT6	machine direction (F / R)	pushing dirt	failure to apply on demand	Machine drives off highwall	operator	S3	95 %	8 %	100 %	E1	AC1	AW2	AR3	C1	b
TT6	machine speed	Considered to be the same as machine direction													
TT6	slow/stop	Considered to be the same as machine direction													
TT7	powered access system	pushing dirt	uncommanded activation	Ladder raises while accessing the machine	operator	S2	95 %	1 %	100 %	E0	AC0	N/A	N/A	C3	b
TT8		pushing dirt	uncommanded activation	Ladder lowers hitting person	bystander	S2	95 %	60 %	1 %	E0	AC0	N/A	N/A	C3	
TT9	ripper / scraper bowl - up / down	maintenance	uncommanded activation	Crushed limb while using ground level service centre with ripper up	maintainer	S2	5 %	43 %	75 %	E1	AC1	AW2	AR2	C2	b
TT9	ripper pitch forward / scraper apron	Considered to be the same as ripper down													
TT9	ripper pitch reverse / scraper eject	Considered to be the same as ripper down													
TT10	steering	maintenance	uncommanded activation	Parking brake on for everything except transport - comes off trailer	maintainer	S3	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	c
TT11		pushing dirt	uncommanded activation	Operator steers off stockpile	operator	S1	95 %	36 %	100 %	E2	AC1	AW2	AR0	C3	
TT12	engine speed	travel	uncommanded activation	Slight increase in speed causing small increase in stopping distance when slow speed manoeuvring in shop or parking area	bystander	S3	25 %	5 %	5 %	E0	AC1	AW2	AR3	C1	a

## M.2 Supporting explanation

### M.2.1 Supporting explanations for dominant scenarios

#### TT1 – blade angle

H: Only hazardous when idle (maximum idle = 60 %). H = 60 %

P: Momentary exposure normally during access. P = 1 %

AC: AC0

#### TT2 – blade angle

H: 10 % of change blade cutting edge, 10 % of assembly / disassembly, and all of troubleshooting. H =  $(10 \% \times 1 \%) + (10 \% \times 1 \%) + 0 \% = 0 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

#### TT3 – blade down

H: 10 % of change blade cutting edge, 10 % of assembly / disassembly, and all of troubleshooting. H =  $(10 \% \times 1 \%) + (10 \% \times 1 \%) + 0 \% = 0 \%$

P: Maintainer there for all of task. P = 100 %

AC: AC0

#### TT4 – hold still

H: Only hazardous when idle (maximum idle = 60 %). H = 60 %

P: Momentary exposure normally during access. P = 1 %

AC: AC1 - It is considered machine abuse to leave machine unattended without blade on ground

AW: AW1 – May not realise the hazard

AR: AR2

#### TT5 – hold still

H: Only when attaching implement. H = 1 %

P: Present for most of cycle. P = 90 %

AC: AC1 - It is considered machine abuse to leave machine unattended without blade on ground

AW: AW1 – May not realise the hazard

AR: AR2

#### TT6 – machine direction

H: Machine stopping for maximum of 1/8th of cycle, moving forward 67 % of time, reverse 32 %, 10 % idle time. H =  $(12,5 \% \times 67 \% \times 32 \% \times 10 \%) = 8 \%$

P: Operator present throughout the cycle. P = 100 %

AC: AC1 - It is considered machine abuse to not push berm behind the berm being pushed off edge

AW: AW2

AR: AR3 - brakes

TT7 – powered access

H: Only hazardous when accessing / egressing the machine. H = 1 %

P: Operator present throughout the cycle. P = 100 %

AC: AC0

TT8 – powered access

H: Bystanders would only be this close when at idle, maximum idle time 60 %. H = 60 %

P: Rare for person to be that close, in that specific spot, looking away from the machine. P = 1 %

AC: AC0

TT9 – ripper down / scraper bowl

H: 25 % of greasing, 25 % of wash windows, 10 % of changing ripper teeth, 10 % of assembly / disassembly, and all of refuelling, and troubleshooting.  $H = (25 \% \times 33 \%) + (25 \% \times 7 \%) + (10 \% \times 1 \%) + (10 \% \times 1 \%) + 33 \% + 0 \% = 43 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC1 – E-stop

AW: AW2

AR: AR2

TT10 – steering

H: All of transport loading / unloading. H = 4 %

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

TT11 – steering

H: Only hazardous when near the edge 80 %, 50 % of failures are hazardous, 90 % idle factor.  $H = 80 \% \times 50 \% \times 90 \% = 36 \%$

P: Always present during an emergency. P = 100 %

AC: AC1 – brakes

AW: AW2

AR: AR0

TT12 – engine speed

H: Proportion of time machine is moving at low engine speed is small (5 %) 90 % idle factor.  $H = 5 \% \times 90 \% = 5 \%$

P: Very rare to be standing this close to a dozer in the path of travel. P = 5 %

AC: AC1 – brakes

AW: AW2

AR: AR3

M.2.2 Application use cases

Table M.2 — Application use case table

Application	Pushing dirt	Drawbar	Pushing scrapers	Ripping	Travel	Maintenance
General construction / waste / Ag (small)	95 %	90 %	50 %	20 %	15 %	5 %
General construction / waste (medium / large)	95 %	90 %	50 %	75 %	25 %	5 %
Mining	95 %	0 %	0 %	95 %	15 %	5 %
Fire dozer	50 %	50 %	0 %	40 %	25 %	5 %

M.2.3 Maintenance task breakdown

Table M.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
refueling	13,0	33 %
transport loading / unloading	1,4	4 %
greasing	13,0	33 %
walk around	2,6	7 %
machine wash	4,3	11 %
window wash	2,6	7 %
change cutting edge	0,5	1 %
change ripper teeth	0,3	1 %
adjust track	0,4	1 %
troubleshooting	0,0	0 %
assembly / disassembly	0,3	1 %
oil sampling	0,3	1 %
clean undercarriage	1,0	3 %

M.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table M.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
slow/stop	1				Uncommanded stop not hazardous
hold still	1				Includes uncommanded release
machine speed			1		Includes failure to release on demand
engine speed			1		Other failure types are less or not hazardous.
machine direction (F / R)	1				Other failure types are less or not hazardous.
steering			1		Includes failure on demand
blade up					No conceivable hazard
blade down			1		Other failure types are less or not hazardous.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

Table M.4 (continued)

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
blade tilt L					Combined with Down
blade tilt R			1		Other failure types are less or not hazardous.
blade angle			1		Other failure types are less or not hazardous.
blade pitch			1		Other failure types are less or not hazardous.
ripper up / scraper bowl					Combined with Down
ripper down / scraper bowl			1		Other failure types are less or not hazardous.
ripper pitch F / scraper apron			1		Other failure types are less or not hazardous.
ripper pitch R / scraper eject			1		Other failure types are less or not hazardous.
power access system			1		Other failure types are less or not hazardous.
operator presence	1				Other failure types are less or not hazardous.
e-stop	1				Other failure types are less or not hazardous.

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

### M.2.5 Notes and assumptions

- Co-worker is someone in similar or larger machine / vehicle.
- Bystander is a pedestrian or light vehicle.
- Pushing off highwall cycle:
  - machine stopping for maximum of 1/ 8th of cycle, moving forward 67 % of time, reverse 32 %, 10 % idle time.
- For e-stops, the highest of PL (see ISO 13850) and the systems the e-stop controls shall be used. In this case both have  $PL_r = c$ .
- Yo-yoing is considered machine abuse; traction assist winch is under forestry.

### M.3 $MPL_r$ mapped to SCS table

Table M.5 shows function-based  $MPL_r$  (see Table M.1) mapped to SCS per the results of the MCSSA for a crawler dozer. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table M.1 would also be mapped to these  $MPL_r$ .

Table M.5 —  $MPL_r$  mapped to SCS

Machine function	Failure type	$MPL_r$ required	Example of mapped system
blade angle	uncommanded activation	<b>b</b>	<b>blade angle</b>
blade tilt	uncommanded activation	<b>b</b>	<b>blade tilt</b>
blade pitch	no hazard	N/A	<b>blade pitch</b>
blade down	uncommanded activation	<b>a</b>	<b>blade down</b>
engine speed	uncommanded activation	<b>a</b>	<b>throttle</b>
e-stop	failure to apply on demand	<b>c</b>	<b>e-stop</b>
hold still	failure to apply on demand	<b>c</b>	<b>parking brake</b>
machine direction (F / R)	failure to apply on demand	<b>b</b>	<b>gear direction control</b>
machine speed	uncommanded activation	<b>b</b>	<b>propel</b>
slow/stop	failure to apply on demand	<b>b</b>	<b>service brakes</b>
power access system	uncommanded activation	<b>b</b>	<b>power access system</b>

**Table M.5** (continued)

<b>Machine function</b>	<b>Failure type</b>	<b>MPL re-quired</b>	<b>Example of mapped system</b>
ripper / scraper bowl – up / down	uncommanded activation	<b>b</b>	<b>ripper down / scraper bowl</b>
ripper pitch forward / scraper apron	uncommanded activation	<b>b</b>	<b>ripper pitch forward / scraper apron</b>
ripper pitch reverse / scraper eject	uncommanded activation	<b>b</b>	<b>ripper pitch reverse / scraper eject</b>
steering	uncommanded activation	<b>c</b>	<b>steering</b>

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex N (normative)

### Pipelayer performance level tables

#### N.1 Pipelayers

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables N.1 to N.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table N.1 — MPL<sub>r</sub> table for pipelayers

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
PL1	boom up / down	lay-in	uncommanded activation	load drops suddenly causing machine tip over	operator	S1	20 %	91 %	100 %	E2	AC0	N/A	N/A	C3	c	
PL2		lay-in	uncommanded activation	Multiple pipelayer supporting section of pipe. Load drops suddenly causing machines to tip over	co-worker	S1	20 %	91 %	100 %	E2	AC0	N/A	N/A	C3		
PL1-2	counter-weight in/out	considered the same as boom up / down														c
PL6-7	engine speed	considered same as machine speed unless it is not tied to machine speed, then no hazard														b
PL3	hold still	tow / retrieval	failure to apply on demand	machine rolls over someone	bystander	S3	2 %	1 %	100 %	E0	AC0	N/A	N/A	C3	c	
PL4		drawbar / winch	failure to apply on demand	machine rolls over someone	bystander	S3	5 %	1 %	100 %	E0	AC0	N/A	N/A	C3		
PL5		maintenance	failure to apply on demand	machine rolls over someone	maintainer	S3	5 %	5 %	4 %	75 %	E0	AC0	N/A	N/A		C3
PL1-2	hook up / down	considered the same as boom up / down														c
PL2-8	load monitoring	considered same as quick drop and boom up / down														c
PL6	machine direction (F / R)	lay-in	uncommanded activation	machine movement causes pipelayer to tip over	operator	S1	20 %	91 %	100 %	E2	AC1	AW2	AR2	C2	b	
PL7		lay-in	uncommanded activation	Multiple pipelayer supporting section of pipe. Machine movement causes pipelayer to tip over	co-worker	S1	20 %	91 %	91 %	100 %	E2	AC1	AW2	AR2		C2
PL6-7	machine speed	considered same as machine direction														b
PL8	quick drop	welding	uncommanded activation	machine tip over	operator	S1	60 %	56 %	100 %	E2	AC0	N/A	N/A	C3	c	
PL9		welding	uncommanded activation	crushed limb	bystander	S2	60 %	44 %	33 %	E1	AC0	N/A	N/A	C3		
PL6-7	slow/stop	same as machine direction - only reacting with quick drop rather than brake.														b

Table N.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
PL10	steering	maintenance	uncommanded activation	Machine comes off trailer when loading / unloading for transport. parking brake on for everything else	maintainer	S3	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	c

## N.2 Supporting explanation

### N.2.1 Supporting explanations for dominant scenarios

#### PL1 – boom up / down

H: 22-minute cycle, 20 min of cycle lifting and positioning when someone could be underload.  $H = (20 / 22) \times 100 = 91 \%$

P: Operator present during the whole cycle.  $P = 100 \%$

AC: AC0

#### PL2 – boom up / down

H: 22-minute cycle, 20 min of cycle lifting and positioning when someone could be underload.  $H = (20 / 22) \times 100 = 91 \%$

P: Person present during the whole cycle.  $P = 100 \%$

AC: AC0

#### PL3 – hold still

H: Hazardous during hook-up only - 1 % of cycle.  $H = 1 \%$

P: Person present for all of hook up.  $P = 100 \%$

AC: AC0

#### PL4 – hold still

H: Hazardous during hook-up only - 1 % of cycle.  $H = 1 \%$

P: Person present for all of hook up.  $P = 100 \%$

AC: AC0

#### PL5 – hold still

H: 40 % of walk around, 40 % of wash machine, and all of refuelling, grease, wash windows, and oil sampling.  $H$  (maintenance tasks) =  $(40 \% \times 7 \%) + (40 \% \times 3 \%) + 37 \% + 37 \% + 7 \% + 1 \% = 86 \%$ . Maintenance is rarely done on slope steep enough to overcome rolling resistance (10 %). Hazard only exists if machine rolls towards maintainer (50 %).  $H = 86 \%$  (maintenance tasks)  $\times 10 \% \times 50 \% = 43 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### PL6 – machine direction (F / R)

H: 22-minute cycle, 20 min of cycle lifting and positioning when someone could be underload.  $H = (20 / 22) \times 100 = 91 \%$

P: Operator present during the whole cycle.  $P = 100 \%$

AC: AC1 – Quick drop or brakes

AW: AW2

AR: AR2

#### PL7 – machine direction (F / R)

H: 22-minute cycle, 20 min of cycle lifting and positioning when someone could be underload.  $H = (20 / 22) \times 100 = 91 \%$

P: Person present during the whole cycle.  $P = 100 \%$

AC: AC1 – Quick drop or brakes

AW: AW2

AR: AR2

PL8 – quick drop

H: Only during travel portion – 2,5 / 4,5.  $H = (2,5 / 4,5) \times 100 = 56 \%$

P: Operator present during the whole cycle.  $P = 100 \%$

AC: AC0

PL9 – quick drop

H: 2 min out of 4,5 min cycle of welding / travel to next section of pipe.  $H = (2 / 4,5) \times 100 = 44 \%$

P: Body parts only under the pipe may get crushed during 1/3 of weld cycle (S1 for rest of underside, no hazard for top side).  $P = 33 \%$

AC: AC0

PL10 – steering

H: All transport loading / unloading.  $H = 4 \%$

P: Maintenance task on / off machine splic.  $P = 75 \%$

AC: AC0

## N.2.2 Application use cases

Table N.2 — Application use case table

Application	Welding	Tie-in	Bending	Stringing	Lay-in	Tow / retrieval	Drawbar / winch	Travel	Maintenance
Pipelaying	60 %	40 %	25 %	20 %	20 %	2 %	5 %	20 %	5 %

## N.2.3 Maintenance task breakdown

Table N.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
refueling	13,0	37 %
transport loading / unloading	0,3	1 %
greasing	13,0	37 %
walk around	2,6	7 %
machine wash	1,0	3 %
window wash	2,6	7 %
cable and componentry inspect	0,7	2 %
adjust track	0,4	1 %
troubleshooting	0,0	0 %

Table N.3 (continued)

	Time (min/day)	% Maintenance time
assembly / disassembly	1,0	3 %
oil sampling	0,3	1 %
clean undercarriage	0,5	1 %

**N.2.4 Function dominant failure type matrix**

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table N.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
slow/stop	1				
hold still	1				
machine speed			1		
engine speed			1		
machine direction (F / R)			1		
steering			1		
boom up / down			1		
counterweight in / out			1		
load monitoring	1				
quick drop			1		
hook up / down			1		
operator presence	1				

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

**N.2.5 Notes and assumptions**

- Co-worker is a person in another machine.
- Bystander is a pedestrian.

**N.3 MPL<sub>r</sub> mapped to SCS table**

Table N.5 shows function-based MPL<sub>r</sub> (see Table N.1) mapped to SCS per the results of the MCSSA for a Pipelayer. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table N.1 would also be mapped to these MPL<sub>r</sub>.

Table N.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL required	Example of mapped system
boom up / down	uncommanded activation	c	boom up / down
counterweight in / out	uncommanded activation	c	counterweight in / out
hold still	failure to apply on demand	c	park brakes
hook up	uncommanded activation	c	hook up

Table N.5 (continued)

Machine function	Failure type	MPL re- quired	Example of mapped system
load monitoring	failure to apply on demand	<b>c</b>	load monitoring
machine direction (F / R)	uncommanded activation	<b>b</b>	gear direction control
quick drop	uncommanded activation	<b>c</b>	quick drop
slow/stop	failure to apply on demand	<b>b</b>	service brakes
steering	uncommanded activation	<b>c</b>	steering

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex O (normative)

### Crawler loader performance level tables

#### 0.1 Crawler loaders

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables O.1 to O.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table O.1 — MPL<sub>r</sub> table for crawler loaders

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CL1	slow/stop	traveling	failure to apply on demand	machine fails to stop when a bystander steps in front of the machine	bystander	S3	20 %	10 %	100 %	E1	AC1	AW2	AR3	C1	b
TT4	hold still			considered same as crawler dozer failure to apply on demand											c
CL2	steering	dozing / spreading / compacting	uncommanded activation	machine steers off stockpile	operator	S1	80 %	30 %	100 %	E2	AC0	N/A	N/A	C3	c
CL3		dozing / spreading / compacting	uncommanded activation	machine steers when it should not and runs over a co-worker	co-worker	S3	80 %	50 %	2 %	E0	AC0	N/A	N/A	C3	
CL4	tool curl	maintenance	uncommanded activation	person contacted by implement	maintainer	S1	5 %	10 %	75 %	E0	AC0	N/A	N/A	C3	a
CL5	tool dump	maintenance	uncommanded activation	foot squashed by implement	maintainer	S2	5 %	10 %	75 %	E0	AC0	N/A	N/A	C3	b
CL6	boom raise	loading / carrying	uncommanded activation	Contacts overhead infrastructure. Crushed by falling objects	co-worker	S3	60 %	50 %	5 %	E1	AC1	AW3	AR1	C2	c
CL7	boom lower	material handling	uncommanded activation	crushed by protruding load	co-worker	S3	10 %	6 %	1 %	E0	AC1	AW2	AR0	C3	c
CL8	ripper down	maintenance	uncommanded activation	contact with ripper	maintainer	S1	5 %	9 %	75 %	E0	AC0	N/A	N/A	C3	a
CL9	ripper up	maintenance	uncommanded activation	squashed foot	maintainer	S2	5 %	9 %	75 %	E0	AC0	N/A	N/A	C3	b
CL7	clam open			considered same as boom lower											c
CL5	clam shut			considered same as tool dump											b
CL7	auxiliary flow			considered same as clam open											c
CL7	implement lockout			considered same as highest implement performance level											c
CL10	machine speed	loading / carrying	uncommanded activation	machine overshoots intended stopping position causing collision	co-worker	S3	60 %	36 %	20 %	E1	AC1	AW2	AR3	C1	b
CL11	machine direction	loading / carrying	failure to apply on demand	failure to change direction causes machine to collide with bystanders outside work area	co-worker	S3	60 %	4 %	25 %	E0	AC1	AW2	AR3	C1	a

Table O.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CL12	engine speed	loading / carrying	uncommanded activation	Machine engine speed goes to low idle causing machine to be stuck in slag pit operator exposed to heat and fumes while waiting for retrieval. Multiple failures would have to occur to be dangerous for a fire risk.	operator	S1	70 %	25 %	100 %	E2	AC0	N/A	N/A	C3	c

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## 0.2 Supporting explanation

### 0.2.1 Supporting explanations for dominant scenarios

#### CL1 – slow/stop

H: Rare for people to walk in front of machines. H = 10 %

P: Always present during an emergency. P = 100 %

AC: AC1 – Bucket to ground is natural reaction for a crawler

AW: AW2

AR: AR3

#### CL2 – steering

H: Only while high on the stockpile and idle factor.  $H = 33 \% \times 90 \% = 30 \%$

P: Operator present during the whole cycle. P = 100 %

AC: AC0

#### CL3 – steering

H: Only half of failures are dangerous. H = 50 %

P: Very rare a person would be close enough to the machine. P = 2 %

AC: AC0

#### CL4 – tool curl

H: 10 % walk around, 10 % machine wash, all transport load / unload, bucket GET, and troubleshooting.  $H = (10 \% \times 7 \%) + (10 \% \times 15 \%) + 7 \% + 0,6 \% + 0,003 \% = 10 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

#### CL5 – tool dump

H: 10 % walk around, 10 % machine wash, all transport load / unload, bucket GET, and troubleshooting.  $H = (10 \% \times 7 \%) + (10 \% \times 15 \%) + 7 \% + 0,6 \% + 0,003 \% = 10 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

#### CL6 – boom raise

H: Minimal time in reverse. Could happen anytime there are overhead objects. H = 50 %

P: P: Rare for people to be in the area. P = 5 %

AC: AC1 - Turn the machine off

AW: AW3

AR: AR1

#### CL7 – boom lower

H: Load only lifted half of 25 % at each end of the cycle  $2 \times 25 \% \times 25 \% \times 50 \%$ . H = 6 %

P: It is considered machine abuse to be under the load, but it may happen momentarily. P = 1 %

AC: AC1 - Could move machine (steering or reverse)

AW: AW2 – Same as wheel loader

AR: AR0 – Same as wheel loader

CL8 – ripper down

H: 10 % walk around, 10 % machine wash, and all of transport load / unload, ripper GET, and troubleshooting.  $H = (10 \% \times 7 \%) + (10 \% \times 15 \%) 7 \% + 0,4 \% + 0,03 \% = 9 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

CL9 – ripper up

H: 10 % walk around, 10 % machine wash, and all of transport load / unload, ripper GET, and troubleshooting.  $H = (10 \% \times 7 \%) + (10 \% \times 15 \%) 7 \% + 0,4 \% + 0,03 \% = 9 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

CL10 – machine speed

H: Only dangerous in reverse (40 %). 90 % factor to account for idle time.  $H = 40 \% \times 90 \% = 36 \%$

P: P: Construction site co-worker rate. P = 20 %

AC: AC1 - Inching pedal or bucket lower to ground which would be normal practice for crawler operators

AW: AW2

AR: AR3

CL11 – machine direction

H: Only dangerous in the last 10 % of reverse legs. 90 % idle correction.  $H = 4 \% \times 90 \% = 4 \%$

P: Machine moves significantly less than wheel loader and would not travel as far outside of work area. P = 25 %

AC: AC1 – brakes

AW: AW2

AR: AR3

CL12 – engine speed

H: Portion of the cycle where operator is exposed to the heat. H = 25 %

P: Operator present during the whole cycle. P = 100 %

AC: AC0

## 0.2.2 Application use cases

Table 0.2 — Application use case table

Application	Traveling	Dozing / spreading / compacting	Ripping	Loading / carrying	Excavation	Material handling	Drawbar / winch	Tow / retrieval	Maintenance
General (demolition, construction, waste)	20 %	80 %	15 %	60 %	80 %	10 %	10 %	3 %	5 %
Steel mill	10 %	30 %	0 %	70 %	0 %	0 %	0 %	5 %	5 %
Ship hold/ port handling	10 %	95 %	0 %	0 %	0 %	0 %	0 %	0 %	5 %

## 0.2.3 Maintenance task breakdown

Table 0.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
refueling	5	17 %
transport loading / unloading	2	7 %
greasing	10	34 %
walk around	2	7 %
machine wash	4,3	15 %
window wash	2	7 %
change bucket / GET	0,17	0,6 %
change ripper / GET	0,11	0,4 %
adjust track	0,7	2 %
troubleshooting	0,01	0,03 %
oil sampling	0,17	0,6 %
clean undercarriage	3	10 %
install lift arm lock	0,07	0,2 %

## 0.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table 0.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
slow/stop	1				Machine does not travel fast enough to make uncommanded brake a dangerous hazard
hold still	1				Considered same as uncommanded release
steering			1		Failure on demand considered the same as uncommanded activation
tool curl			1		

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

Table O.4 (continued)

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
tool dump			1		
boom raise			1		
boom lower			1		
clam open			1		
clam shut			1		
coupler				1	Multiple failures required for coupler to be dangerous. Assumes "hinged" or "hooked" coupler
ripper down			1		
ripper up			1		
winch in			1		Uncommon attachment
winch out			1		Uncommon attachment
implement lockout	1				
auxiliary flow			1		
machine speed			1		
machine direction	1				Other failure types considered no worse than failure to apply on demand
engine speed			1		

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

0.2.5 Notes and assumptions

- Winch is an uncommon attachment and was not assessed.
- Multiple failures required for coupler to be dangerous. Assumes "hinged" or "hooked" coupler.

0.3 MPL<sub>r</sub> mapped to SCS table

Table 0.5 shows function-based MPL<sub>r</sub> (see Table 0.1) mapped to SCS per the results of the MCSSA for a crawler loader. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table 0.1 would also be mapped to these MPL<sub>r</sub>.

Table 0.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL required	Example of mapped system
slow/stop	failure to apply on demand	b	service brakes
hold still	failure to apply on demand	c	park brakes
steering	uncommanded activation	c	steering
tool curl	uncommanded activation	a	tool curl
tool dump	uncommanded activation	b	tool dump
boom raise	uncommanded activation	c	boom raise
boom lower	uncommanded activation	c	boom lower
Ripper down	uncommanded activation	a	ripper down
ripper up	uncommanded activation	b	ripper up
clam open	uncommanded activation	c	clam open
clam shut	uncommanded activation	b	clam shut
auxiliary flow	uncommanded activation	c	auxiliary flow
implement lockout	Failure to apply on demand	c	implement lockout

Table 0.5 (continued)

Machine function	Failure type	MPL re- quired	Example of mapped system
machine speed	uncommanded activation	<b>b</b>	propel
machine direction	Failure to apply on demand	<b>a</b>	gear direction control
engine speed	uncommanded activation	<b>c</b>	throttle

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex P (normative)

### Wheeled dozer performance level tables

#### P.1 Wheeled dozer

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables P.1](#) to [P.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table P.1 — MPL<sub>r</sub> table for wheeled dozer

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CO3	blade lift				same as landfill compactors										b
LW7	blade lower				same as large wheel loader boom lower										b
LW8-9	hold still				same as large wheel loader										c
LW13	machine direction				same as large wheel loader										c
LW1-3	machine speed				same as large wheel loader										b
RD13	powered access				same as rigid frame trucks										c
WD1	ripper raise	maintenance	uncommanded activation	no significant injury	maintainer	S0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	QM
WD3	transmission neutralize	slow speed maneuvering	uncommanded deactivation	collision	bystander	S3	6 %	20 %	25 %	E0	AC1	AW2	AR3	C1	a
WD2	ripper lower	maintenance	uncommanded activation	crushed foot	maintainer	S2	5 %	5 %	75 %	E0	AC0	N/A	N/A	C3	b
LW8-9					no worse than uncommanded hold still										c
LW13-15	slow/stop				same as large wheel loader										c
LW10-11	steering				same as large wheel loader										d
LW7	tilt left / right				same as uncommanded blade lower										b

**P.2 Supporting explanation**

**P.2.1 Supporting explanations for dominant scenarios**

WD1 – ripper raise

H: N / A

P: N / A

AC: N / A

WD2 – ripper lower

H: 5 % of machine wash and all of troubleshooting and get replace – ripper.  $H = (5 \% \times 10 \%) + 2 \% + 2 \% = 5 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

WD3 – transmission neutralize

H: Time when machine is idle while waiting.  $H = 20 \%$

P: Typical bystander rate in central / parking areas.  $P = 25 \%$

AC: AC1 – brakes

AW: AW2

AR: AR3 – The brakes would be under foot and the machine moves slowly

**P.2.2 Application use cases**

**Table P.2 — Application use case table**

Application	Traveling	Dozing	Ripping	Slow speed manoeuvring	Maintenance
general	50 %	80 %	10 %	6 %	5 %

**P.2.3 Maintenance task breakdown**

**Table P.3 — Maintenance task breakdown**

	Time (min/day)	% Maintenance time
walk around	20	40 %
camera clean	2	4 %
refueling	10	20 %
oil sampling	1	2 %
greasing	5	10 %
change blade / GET <sup>a</sup>	1	2 %
change ripper / GET <sup>a</sup>	1	2 %
machine wash	5	10 %
window wash	2	4 %

<sup>a</sup> Ground engaging Tool (GET) change only considers the portion of the task required to block the implement.

Table P.3 (continued)

	Time (min/day)	% Maintenance time
troubleshooting	1	2 %
install articulation lock	1	2 %
static brake test	1	2 %

<sup>a</sup> Ground engaging Tool (GET) change only considers the portion of the task required to block the implement.

## P.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table P.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
slow/stop	1				
hold still	1				Uncommanded deactivation is the same as failure to apply on demand.
steering					Failure on demand is considered the same as uncommanded activation.
tilt left			1		
tilt right			1		
tip back			1		
tip foreword			1		
ripper raise			1		
ripper lower			1		
blade lift				1	
blade lower			1		
machine speed			1		
machine direction	1				Uncommanded activation is the same as uncommanded hold still.
powered access			1		

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

## P.2.5 Notes and assumptions

- Co-worker is a person in another machine.
- Bystander is a pedestrian.

## P.3 MPL<sub>r</sub> mapped to SCS table

Table P.5 shows function-based MPL<sub>r</sub> (see Table P.1) mapped to SCS per the results of the MCSSA for a wheeled dozer. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table P.1 would also be mapped to these MPL<sub>r</sub>.

Table P.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
blade lift	uncommanded activation	<b>b</b>	<b>blade lift</b>
blade lower	uncommanded activation	<b>b</b>	<b>blade lower</b>
hold still	failure to apply on demand	<b>c</b>	<b>parking brake</b>
machine direction	failure to apply on demand	<b>c</b>	<b>gear direction control</b>
machine speed	uncommanded activation	<b>b</b>	<b>propel</b>
powered access	uncommanded activation	<b>c</b>	<b>powered access</b>
ripper raise	uncommanded activation	<b>QM</b>	<b>ripper raise</b>
ripper lower	uncommanded activation	<b>c</b>	<b>ripper lower</b>
slow/stop	uncommanded activation	<b>c</b>	<b>service brakes</b>
steering	uncommanded activation	<b>d</b>	<b>steering</b>
tilt left / right	uncommanded activation	<b>b</b>	<b>tilt left / right</b>
transmission neutralize	uncommanded deactivation	<b>a</b>	<b>gear direction control</b>

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex Q (normative)

### Scraper performance level tables

#### Q.1 Scrapers

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables Q.1](#) to [Q.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table Q.1 — MPL<sub>r</sub> table for scrapers

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
SC1	slow/stop	traveling	failure to apply on demand	collision	operator	S1	80 %	40 %	100 %	E2	AC1	AW2	AR2	C2	b	
SC2		traveling	failure to apply on demand	collision	bystander	S3	80 %	1 %	100 %	E0	AC1	AW2	AR2	C2		
SC3		traveling	uncommanded activation	unexpected jerk of operator	operator	operator	S1	80 %	100 %	100 %	E2	AC0	N/A	N/A		C3
SC4	hold still	maintenance	failure to apply on demand	run over	maintainer	S3	5 %	12 %	75 %	E0	AC1	AW2	AR3	C1	a	
LW8-9																Considered same as wheel loader
SC5	steering	traveling	uncommanded activation	collision	operator	S1	80 %	100 %	100 %	E2	AC0	N/A	N/A	C3	c	
SC6		traveling	uncommanded activation	collision	bystander	bystander	S3	80 %	100 %	1 %	E0	AC0	N/A	N/A		C3
SC3	bowl down	Considered same as uncommanded stop														
SC7	apron down	maintenance	uncommanded activation	crushed limb	maintainer	S2	5 %	1 %	75 %	E0	AC0	N/A	N/A	C3	b	
SC8	bail down	slow speed maneuvering	uncommanded activation	hit by falling bail	bystander	S2	12 %	50 %	25 %	E1	AC0	N/A	N/A	C3	c	
SC9	machine speed	slow speed maneuvering	uncommanded activation	run over by machine	bystander	S3	12 %	10 %	100 %	E1	AC1	AW2	AR3	C1	b	
SC10	machine direction	slow speed maneuvering	failure to apply on demand	run over by machine	bystander	S3	12 %	10 %	25 %	E0	AC1	AW2	AR3	C1	a	
SC11	transmission neutralize	slow Speed maneuvering	uncommanded deactivation	collision	bystander	S3	12 %	20 %	25 %	E0	AC1	AW2	AR3	C1	a	
RD13	powered access ladder	considered the same as trucks														
SC3	implement lockout	same as the systems it controls														

## Q.2 Supporting explanation

### Q.2.1 Supporting explanations for dominant scenarios

SC1 – slow/stop

H: 40 % of time is cornering. H = 40 %

P: Operator present during the whole cycle. P = 100 %

AC: AC1 - Lower bowl or use park brake

AW: AW2

AR: AR2

SC2 – slow/stop

H: Only when stopping to avoid hitting a bystander. H = 1 %

P: Always present during an emergency. P = 100 %

AC: AC1 - Lower bowl or use park brake

AW: AW2

AR: AR2

SC3 – slow/stop

H: Hazard exists during the whole cycle. H = 100 %

P: Operator present during the whole cycle. P = 100 %

AC: AC0

SC4 – hold still

H: 20 % of grease, 20 % of walk-around, 20 % of machine wash, 25 % of window wash, 50 % of oil sampling, and all of change cutting edge and troubleshooting.  $H = (20 \% \times 32 \%) + (20 \% \times 16 \%) + (20 \% \times 5 \%) + (25 \% \times 3 \%) + (50 \% \times 1 \%) + 0,03 \% + 0,03 \% = 12 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC1 - implement on ground or chocks

AW: AW2

AR: AR3

SC5 – steering

H: Hazard exists during the whole cycle. H = 100 %

P: Operator present during the whole cycle. P = 100 %

AC: AC0

SC6 – steering

H: Hazard exists during the whole cycle. H = 100 %

P: Rare that a person is in the work zone. P = 1 %

AC: AC0

SC7 – apron down

H: Momentary during wash. H = 1 %

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

SC8 – bail down

H: Idle up to 50 %. H = 50 %

P: Typical park up area. P = 25 %

AC: AC0

SC9 – machine speed

H: Only hazardous when slowing down to avoid hitting someone. H = 10 %

P: Always present during an emergency. P = 100 %

AC: AC1 – brakes

AW: AW2

AR: AR3

SC10 – machine direction

H: Scrapers are rarely reversed compared to other machines. H = 10 %

P: Typical park up area. P = 25 %

AC: AC1 – brakes

AW: AW2

AR: AR3

SC11 – transmission neutralize

H: Time when machine is idle while waiting. H = 20 %

P: Typical bystander rate in central / parking areas. P = 25 %.

AC: AC1 – brakes

AW: AW2

AR: AR3 – The brakes would be under foot and the machine moves slowly

**Q.2.2 Application use cases**

**Table Q.2 — Application use case table**

Application	Traveling	Loading	Unloading	Coupling / decoupling	Slow speed manoeu- vring	Maintenance
construction	80 %	20 %	10 %	5 %	12 %	5 %

### Q.2.3 Maintenance task breakdown

Table Q.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
refueling	26	42 %
transport load / unload	0,4	0,7 %
greasing	20	32 %
walk around	10	16 %
machine wash	3	5 %
window wash	2	3 %
change cutting edge	0,02	0,04 %
change bits	0,02	0,04 %
troubleshooting	0,02	0,03 %
oil sampling	0,33	0,5 %

### Q.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table Q.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
slow/stop	1		1		
hold still	1				
steering			1		
bowl up			1		
bowl down			1		
apron up			1		
apron down			1		
ejector forward			1		
ejector back			1		
bail up			1		
bail down			1		
elevator forward			1		
elevator reverse			1		
machine speed			1		
machine direction	1				Uncommanded activation is the same as uncommanded stop.
powered access			1		
implement lockout	1				

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

### Q.2.5 Notes and assumptions

— Co-worker is a person in another machine.

— Bystander is a pedestrian.

### Q.3 MPL<sub>r</sub> mapped to SCS table

Table Q.5 shows function-based MPL<sub>r</sub> (see Table Q.1) mapped to SCS per the results of the MCSSA for a scraper. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table Q.1 would also be mapped to these MPL<sub>r</sub>.

**Table Q.5 — MPL<sub>r</sub> mapped to SCS**

Machine function	Failure type	MPL re-quired	Example of mapped system
slow/stop	failure to apply on demand	<b>b</b>	<b>service brakes</b>
	uncommanded activation	<b>c</b>	
hold still	failure to apply on demand	<b>c</b>	<b>parking brake</b>
steering	uncommanded activation	<b>c</b>	<b>steering</b>
bowl down	uncommanded activation	<b>c</b>	<b>bowl down</b>
apron down	uncommanded activation	<b>b</b>	<b>apron down</b>
bail down	uncommanded activation	<b>c</b>	<b>bail down</b>
machine speed	uncommanded activation	<b>b</b>	<b>propel</b>
machine direction	failure to apply on demand	<b>a</b>	<b>gear direction control</b>
powered access ladder	uncommanded activation	<b>c</b>	<b>powered access ladder</b>
implement lockout	uncommanded activation	<b>c</b>	<b>implement lockout</b>
transmission neutralize	uncommanded deactivation	<b>a</b>	<b>gear direction control</b>

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

## Annex R (normative)

### Crawler excavators equal to or greater than 109 000 kg performance level tables

#### R.1 Crawler excavators equal to or greater than 109 000 kg

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables R.1 to R.5](#)) or in [Clause 5](#).

Table R.1 — MPL<sub>r</sub> table for crawler excavators equal to or greater than 109 000 kg

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
HX1	left track forward	truck loading	uncommanded activation	machine falls off edge	operator	S3	90 %	27 %	100 %	E2	AC1	AW3	AR3	C0	b	
HX2		maintenance	uncommanded activation	person run over	maintainer	S3	5 %	1 %	75 %	E0	AC1	AW2	AR2	C2		
HX3	boom raise	maintenance	uncommanded activation	implement knocks maintainer off-platform (external to machine)	maintainer	S3	5 %	2 %	75 %	E0	AC0	N/A	N/A	C3	c	
HX3	boom lower	considered same as boom raise														c
HX3	bucket curl	considered same as boom raise														c
HX3	bucket dump	considered same as boom raise														c
HX4	clam open	maintenance	uncommanded activation	crushed limb	maintainer	S2	5 %	1 %	75 %	E0	AC0	N/A	N/A	C3	b	
HX4	clam shut	considered to be the same as clam open														b
HX3	arm out	considered same as boom raise														c
HX3	arm in	considered same as boom raise														c
HX5	slew / swing start	maintenance	uncommanded activation	person crushed between machine and object	maintainer	S3	5 %	7 %	75 %	E0	AC0	N/A	N/A	C3	c	
HX6	slew / swing stop	truck loading	failure to apply on demand	bucket contacts cab of truck	co-worker	S3	90 %	2 %	100 %	E1	AC1	AW2	AR3	C1	b	
HX7	slew / swing hold still	maintenance	failure to apply on demand	person crushed between machine and object	maintainer	S3	5 %	17 %	75 %	E0	AC0	N/A	N/A	C3	c	
HX8	engine speed	cannot cause increase in implement speed, therefore no significant hazard														

Table R.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
HX9	travel speed	maintenance	uncommanded activation	run over by machine	maintainer	S3	5 %	1 %	75 %	E0	AC1	AW2	AR2	C2	b
HX10	travel hold still	maintenance	failure to apply on demand	run over by machine	maintainer	S3	5 %	1 %	75 %	E0	AC0	N/A	N/A	C3	c
HX11	powered access ladder movement	maintenance	uncommanded activation	eggs caught in ladder causing fall backwards	maintainer	S2	5 %	7 %	75 %	E0	AC0	N/A	N/A	C3	b
HX12	powered access ladder interlock	maintenance	failure to apply on demand	person pinched between ladder and machine or wall	maintainer	S3	5 %	12 %	75 %	E0	AC0	N/A	N/A	C3	c
HX13	service centre motion	maintenance	uncommanded activation	person has service centre come down on head	maintainer	S1	5 %	3 %	75 %	E0	AC0	N/A	N/A	C3	a
HX14	service centre interlock	maintenance	failure to apply on demand	person pinched between machine and service centre	maintainer	S3	5 %	23 %	50 %	E0	AC0	N/A	N/A	C3	c
HX15	machine lockout	maintenance	failure to apply on demand	person crushed between machine and object	maintainer	S3	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	c

## R.2 Supporting explanation

### R.2.1 Supporting explanations for dominant scenarios

#### HX1 – left track forward

H: All of the cycle except for digging (60 %), only in one direction (50 %), and idle factor (90 %).  $H = 60 \% \times 50 \% \times 90 \% = 27 \%$

P: Operator present during the whole cycle.  $P = 100 \%$

AC: AC1 - E-stop and implement

AW: AW3 - Operator becomes aware of hazard before it is dangerous because of the slow movement of the machine

AR: AR3 - Implement is in hand

#### HX2 – left track forward

H: All of manoeuvring (travel / swing) in maintenance area and troubleshooting.  $H = 0,2\% + 1 \% = 1 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1 – Travel hold still and e-stop

AW: AW2

AR: AR2

#### HX3 – boom raise

H: 80 % of aligning linkage for exchange of components, 25 % of machine wash and all of troubleshooting.  $H = (80 \% \times 0,3 \%) + (25 \% \times 2 \%) + 1 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### HX4 – clam open

H: 10 % of aligning linkage for exchange of components and all of troubleshooting.  $H = (10 \% \times 0,3 \%) + 1 \% = 1 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### HX5 – slew / swing start

H: 25 % of daily inspection and all of aligning linkage for exchange of components and troubleshooting.  $H = (25 \% \times 24 \%) + 0,2 \% + 1 \% = 7 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### HX6 – slew / swing stop

H: 25 % of vertical, 40 % of horizontal, idle factor of 90 %, swing of 20 % of cycle.  $H = 25 \% \times 40 \% \times 90 \% \times 20 \% = 2 \%$

P: Always present during an emergency.  $P = 100 \%$

AC: AC1 - E-stop or move implement in hand

AW: AW2

AR: AR3

#### HX7 – slew / swing hold still

H: 25 % of daily inspection, 50 % of machine wash, 50 % of camera clean and all of aligning linkage for exchange of components and troubleshooting.  $H = (25 \% \times 24 \%) + (50 \% \times 2 \%) + (50 \% \times 18 \%) + 0,3\% + 1 \% = 17 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### HX8 – engine speed

H: All of aligning linkage for exchange of components and troubleshooting.  $H = 0,2\% + 1 \% = 1 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1 - implement

AW: AW3 - Engine speed increases slowly

AR: AR3 - Implement control is in hand

#### HX9 – travel speed

H: All of manoeuvring (travel / swing) in maintenance area and troubleshooting.  $H = 0,2\% + 1 \% = 1 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1 – E-stop

AW: AW2

AR: AR2

#### HX10 – travel hold still

H: All of aligning linkage for exchange of components and troubleshooting.  $H = 0,2\% + 1 \% = 1 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### HX11 – powered access ladder movement

H: 20 % of access / egress machine, 5 % of daily inspection, 5 % of machine wash, 5 % of camera clean and all of troubleshooting.  $H = (20 \% \times 18 \%) + (5 \% \times 24 \%) + (5 \% \times 2 \%) + (5 \% \times 18 \%) + 1 \% = 7 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

#### HX12 – powered access ladder interlock

H: 50 % of access / egress machine, 5 % of daily inspection, 5 % of machine wash, 5 % of camera clean and all of troubleshooting.  $H = (50\% \times 18 \%) + (5 \% \times 24 \%) + (5 \% \times 2 \%) + (5 \% \times 18 \%) + 1 \% = 12 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

HX13 – service centre motion

H: 2 % of daily inspection, 5 % of refuelling / refilling / fluid top off, 5 % of oil sampling, 2 % of machine wash, and all of troubleshooting.  $H = (2 \% \times 24 \%) + (5 \% \times 24 \%) + (5 \% \times 1 \%) + (2 \% \times 2 \%) + 1 \% = 3 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

HX14 – service centre interlock

H: 10 % of daily inspection and all of refuelling / refilling / fluid top off, oil sampling, and troubleshooting.  $H = (10 \% \times 24 \%) + 24 \% + 1 \% + 1 \% = 28 \%$

P: Need to be standing in a very specific area. P = 50 %

AC: AC0

HX15 – machine lockout

H: All of machine wash and troubleshooting.  $H = 2 \% + 1 \% = 3 \%$

P: Maintenance task on / off machine split. P = 75 %

AC: AC0

R.2.2 Application use cases

Table R.2 — Application use case table

Application	Truck loading	General excavation	Dropping balls to crush rocks	Traveling	Maintenance
mining and quarry	90 %	15 %	5 %	10 %	5 %
construction	90 %	15 %	0 %	10 %	5 %

R.2.3 Maintenance task breakdown

Table R.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
access / egress machine	15	18 %
maneuvering (travel / swing) in maintenance area	0,25	0,3 %
daily inspection	20	24 %
refueling / refilling / fluid top off	20	24 %
aligning linkage for exchange of components	0,25	0,3 %
oil sampling	1	1 %
machine wash	2	2 %
window wash	10	12 %
troubleshooting	1	1 %

Table R.3 (continued)

	Time (min/day)	% Maintenance time
camera clean	15	18 %

## R.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table R.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
left track forward			1		Failure to apply on demand, failure to release on demand, uncommanded activation, and uncommanded deactivation all result in an uncommanded steer.
left track back					It is the same as left track forward.
right track forward					It is the same as left track forward.
right track back					It is the same as left track forward.
engine speed			1		
travel speed					
boom raise			1		
boom lower			1		
clam open			1		
clam shut			1		
arm in			1		
arm out			1		
bucket curl			1		
bucket dump			1		
Slew / swing start			1		Uncommanded activation is the same as uncommanded stop.
slew / swing stop	1				
Slew/swing hold still	1				
travel hold still	1				
powered access ladder movement			1		
powered access ladder interlock	1				Other failure types are considered no worse than failure to apply on demand.
service centre motion			1		
service centre interlock	1				
machine lockout	1				
cable reel			1		

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

## R.2.5 Notes and assumptions

- It is considered machine abuse to load the truck from the front.
- Co-worker is a person in another machine.
- Bystander is a pedestrian or in a light vehicle.

- Bucket dropping onto truck body without swinging is S0.
- It is considered machine abuse to operate a shovel under power lines.

### R.3 MPL<sub>r</sub> mapped to SCS table

Table R.5 shows function-based MPL<sub>r</sub> (see Table R.1) mapped to SCS per the results of the MCSSA for a crawler excavators equal to or greater than 109 000 kg. Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table R.1 would also be mapped to these MPL<sub>r</sub>.

Table R.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
left track forward	uncommanded activation	<b>b</b>	<b>track motion</b>
boom raise	uncommanded activation	<b>c</b>	<b>boom raise</b>
boom lower	uncommanded activation	<b>c</b>	<b>boom lower</b>
bucket curl	uncommanded activation	<b>c</b>	<b>bucket curl</b>
bucket dump	uncommanded activation	<b>c</b>	<b>bucket dump</b>
clam open	uncommanded activation	<b>b</b>	<b>clam open</b>
clam shut	uncommanded activation	<b>b</b>	<b>clam shut</b>
arm in	uncommanded activation	<b>c</b>	<b>arm in</b>
arm out	uncommanded activation	<b>c</b>	<b>arm out</b>
slew / swing start	uncommanded activation	<b>c</b>	<b>slew / swing start</b>
slew / swing stop	failure to apply on demand	<b>b</b>	<b>slew / swing stop</b>
slew / swing hold still	failure to apply on demand	<b>c</b>	<b>slew / swing hold still</b>
engine speed	no hazard	<b>N/A</b>	<b>throttle</b>
travel speed	uncommanded activation	<b>b</b>	<b>propel</b>
travel hold still	failure to apply on demand	<b>c</b>	<b>brake</b>
powered access ladder movement	uncommanded activation	<b>b</b>	<b>powered access ladder movement</b>
powered access ladder interlock	failure to apply on demand	<b>c</b>	<b>powered access ladder interlock</b>
service centre movement	uncommanded activation	<b>a</b>	<b>service centre movement</b>
service centre interlock	failure to apply on demand	<b>c</b>	<b>service centre interlock</b>
machine lockout	failure to apply on demand	<b>c</b>	<b>machine lockout</b>
cable reel	no hazard	<b>N/A</b>	<b>cable reel</b>

## Annex S (normative)

### Cable excavator (front shovel) performance level tables

#### S.1 Cable excavator (front shovel)

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables S.1](#) to [S.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table S.1 — MPL<sub>r</sub> table for cable excavator (front shovel)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CS1	engine speed	maintenance	uncommanded activation	implement knocks maintainer off platform	maintainer	S3	5 %	7 %	75 %	E0	AC0	N/A	N/A	C3	c
CS2	crowd hold still			considered same as hoist raise											c
CS2	crowd in			considered same as hoist raise											c
CS2	crowd out			considered same as hoist raise											c
CS2	hoist hold still			considered same as hoist raise											c
CS2	hoist lower			considered same as hoist raise											c
CS2	hoist raise	maintenance	uncommanded activation	implement knocks maintainer off platform	maintainer	S3	5 %	6 %	75 %	E0	AC0	N/A	N/A	C3	c
CS3	left track forward	maintenance	uncommanded activation	run over by machine	maintainer	S3	5 %	2 %	75 %	E0	AC1	AW2	AR2	C2	b
CS4	machine lockout	maintenance	failure to apply on demand	person crushed between machine and object	maintainer	S3	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	c
CS5	powered access ladder interlock	maintenance	failure to apply on demand	person pinched between ladder and machine or wall	maintainer	S3	5 %	14 %	75 %	E0	AC0	N/A	N/A	C3	c
CS6	powered access ladder movement	maintenance	uncommanded activation	legs caught in ladder causing fall backwards	maintainer	S2	5 %	8 %	75 %	E0	AC0	N/A	N/A	C3	b
CS7	slew / swing start	maintenance	uncommanded activation	person crushed between machine and object	maintainer	S3	5 %	8 %	75 %	E0	AC0	N/A	N/A	C3	c
CS8	slew / swing stop / hold still	maintenance	failure to apply on demand	person crushed between machine and object	maintainer	S3	5 %	26 %	75 %	E0	AC0	N/A	N/A	C3	c
CS9	travel hold still	maintenance	failure to apply on demand	run over by machine	maintainer	S3	5 %	7 %	75 %	E0	AC0	N/A	N/A	C3	c
CS10	travel speed	maintenance	uncommanded activation	run over by machine	maintainer	S3	5 %	2 %	75 %	E0	AC1	AW2	AR2	C2	b

## S.2 Supporting explanation

### S.2.1 Supporting explanations for dominant scenarios

CS1 – engine speed

H: All of rope change and troubleshooting.  $H = 6 \% + 1,4 \% = 7 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS2 – hoist raise

H: 80 % of rope change and all of troubleshooting.  $(80 \% \times 6 \%) + 1,4 \% = 6 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS3 – left track forward

H: All of manoeuvring (travel / swing) in maintenance area and all of troubleshooting.  $H = 0,3 \% + 1,4 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1 – Travel hold still and e-stop

AW: AW2

AR: AR2

CS4 – machine lockout

H: All of machine wash and all of troubleshooting.  $3 \% + 1,4 \% = 4 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS5 – powered access ladder interlock

H: 50 % of access / egress machine, 5 % of daily inspection, 5 % of machine wash, and 5 % of camera clean and all of troubleshooting.  $H = (50 \% \times 20 \%) + (5 \% \times 27 \%) + (5 \% \times 3 \%) + (5 \% \times 20 \%) + 1,4 \% = 14 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS6 – powered access ladder movement

H: 20 % of access / egress machine, 5 % of daily inspection, 5 % of refuelling / refilling / fluid top off, 5 % of machine wash, and 5 % of camera clean and all of troubleshooting.  $H = (20 \% \times 20 \%) + (5 \% \times 27 \%) + (5 \% \times 7 \%) + (5 \% \times 3 \%) + (5 \% \times 20 \%) + 1,4 \% = 8 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS7 – slew / swing start

H: 25 % of daily inspection and all of manoeuvring (travel / swing) in maintenance area and all of troubleshooting.  $H = (25 \% \times 27 \%) + 0,3 \% + 1,3 \% = 8 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS8 –slew / swing stop / hold still

H: 25 % of daily inspection, 50 % of machine wash, 50 % of camera clean and all rope change and all of troubleshooting.  $H = (25 \% \times 27 \%) + (50 \% \times 3 \%) + (50 \% \times 20 \%) + 6 \% + 1,3 \% = 26 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS9 – travel hold still

H: All of rope change and all of troubleshooting.  $H = 6 \% + 1,3 \% = 7 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

CS10 – travel speed

H: All of manoeuvring (travel / swing) in maintenance area and all of troubleshooting.  $H = 0,3 \% + 1,4 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1 – E-stop

AW: AW2

AR: AR2

S.2.2 Application use cases

Table S.2 — Application use case table

Application	Truck loading	Excavation (no truck)	Traveling	Maintenance
rope shovel	95 %	10 %	5 %	5 %

S.2.3 Maintenance task breakdown

Table S.3 — Maintenance task breakdown

	Time (min/day)	% Maintenance time
access / egress machine	15	20 %
maneuvering (travel / swing) in maintenance area	0,25	0,3 %
daily inspection	20	27 %
refueling / refilling / fluid top off	5	7 %
rope change	4,2	6 %
oil sampling	1	1 %
machine wash	2	3 %

Table S.3 (continued)

	Time (min/day)	% Maintenance time
window wash	10	14 %
troubleshooting	1	1,4 %
camera clean	15	20 %

### S.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table S.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
left track forward			1		Failure to apply on demand, failure to release on demand, uncommanded activation, and uncommanded deactivation all result in an uncommanded steer.
left track back					It is the same as left track forward.
right track forward					It is the same as left track forward.
right track back					It is the same as left track forward.
travel speed			1		
engine speed			1		
hoist raise			1		
hoist lower			1		
hoist hold still	1				
crowd in			1		
crowd out			1		
crowd hold still	1				
bucket dump			1		It is only applicable to shovels - not drag lines.
slew / swing start			1		
slew / swing stop / hold still	1				
Travel hold Still	1				
powered access ladder movement			1		
powered access ladder interlock	1				Other failure types considered no worse than failure to apply on demand.
machine lockout	1				
cable reel			1		Grid power only

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

### S.2.5 Notes and assumptions

- Taking a bucket off a drag line and putting on a clam shell causes the machine to become a foundation excavation machine falling under ISO TC 195.

- Taking off a bucket and adding a wrecking ball, material handling, or other attachments is derivation defined in ISO 6165, but will not be assessed in this assessment. Manufacturers should assess these themselves.
- Using hydraulic shovel cycle times.
- This does not consider walking drag lines.

### S.3 MPL<sub>r</sub> mapped to SCS table

Table S.5 shows function-based MPL<sub>r</sub> (see Table S.1) mapped to SCS per the results of the MCSSA for a cable excavator (front shovel). Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table S.1 would also be mapped to these MPL<sub>r</sub>.

Table S.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
engine speed	uncommanded activation	c	throttle
crowd hold still	failure to apply on demand	c	crowd hold still
crowd in	uncommanded activation	c	crowd in
crowd out	uncommanded activation	c	crowd out
hoist hold still	failure to apply on demand	c	hoist hold still
hoist lower	uncommanded activation	c	hoist lower
hoist raise	uncommanded activation	c	hoist raise
left track forward	uncommanded activation	b	track motion
machine lockout	failure to apply on demand	c	machine lockout
powered access ladder inter-lock	failure to apply on demand	c	powered access ladder interlock
powered access ladder move-ment	uncommanded activation	b	powered access ladder movement
slew / swing start	uncommanded activation	c	slew / swing start
slew / swing stop / hold Still	failure to apply on demand	c	slew / swing stop / hold still
travel hold Still	failure to apply on demand	c	brake
travel Speed	uncommanded activation	b	propel

## Annex T (normative)

### Cable excavator (dragline) performance level tables

#### T.1 Cable excavator (dragline)

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables T.1 to T.5](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table T.1 — MPL<sub>r</sub> table for cable excavator (dragline)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
DS1	engine speed	maintenance	uncommanded activation	implement knocks maintainer off platform	maintainer	S3	5 %	2 %	75 %	E0	AC0	N/A	N/A	C3	c
DS2	crowd hold still			considered same as hoist raise											c
DS2	crowd in			considered same as hoist raise											c
DS2	crowd out			considered same as hoist raise											c
DS2	hoist hold still			considered same as hoist raise											c
DS2	hoist lower			considered same as hoist raise											c
DS2	hoist raise	maintenance	uncommanded activation	implement knocks maintainer off platform	maintainer	S3	5 %	2 %	75 %	E0	AC0	N/A	N/A	C3	c
DS3	left track forward	maintenance	uncommanded activation	run over by machine	maintainer	S3	5 %	2 %	75 %	E0	AC1	AW2	AR2	C2	b
DS4	machine lockout	maintenance	failure to apply on demand	person crushed between machine and object	maintainer	S3	5 %	4 %	75 %	E0	AC0	N/A	N/A	C3	c
DS5	powered access ladder interlock	maintenance	failure to apply on demand	person pinched between ladder and machine or wall	maintainer	S3	5 %	14 %	75 %	E0	AC0	N/A	N/A	C3	c
DS6	powered access ladder movement	maintenance	uncommanded activation	legs caught in ladder causing fall backwards	maintainer	S2	5 %	9 %	75 %	E0	AC0	N/A	N/A	C3	b
DS7	slew / swing start	maintenance	uncommanded activation	person crushed between machine and object	maintainer	S3	5 %	8 %	75 %	E0	AC0	N/A	N/A	C3	c
DS8	slew / swing stop / hold still	maintenance	failure to apply on demand	person crushed between machine and object	maintainer	S3	5 %	21 %	75 %	E0	AC0	N/A	N/A	C3	c
DS9	travel hold still	maintenance	failure to apply on demand	run over by machine	maintainer	S3	5 %	2 %	75 %	E0	AC0	N/A	N/A	C3	c
DS10	travel speed	maintenance	uncommanded activation	run over by machine	maintainer	S3	5 %	2 %	75 %	E0	AC1	AW2	AR2	C2	b

## T.2 Supporting explanation

### T.2.1 Supporting explanations for dominant scenarios

DS1 – engine speed

H: All of rope change and troubleshooting.  $H = 1 \% + 1 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS2 – hoist raise

H: 80 % of rope change and all of troubleshooting.  $(80 \% \times 1 \%) + 1 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS3 – left track forward

H: All of manoeuvring (travel / swing) in maintenance area and all of troubleshooting.  $H = 0,3 \% + 1,4 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1 – Travel hold still and e-stop

AW: AW2

AR: AR2

DS4 – machine lockout

H: All of machine wash and all of troubleshooting.  $3 \% + 1,4 \% = 4 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS5 – powered access ladder interlock

H: 50 % of access / egress machine, 5 % of daily inspection, 5 % of machine wash, and 5 % of camera clean and all of troubleshooting.  $H = (50 \% \times 20 \%) + (5 \% \times 27 \%) + (5 \% \times 3 \%) + (5 \% \times 20 \%) + 1,4 \% = 14 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS6 – powered access ladder movement

H: 20 % of access / egress machine, 5 % of daily inspection, 5 % of refuelling / refilling / fluid top off, 5 % of machine wash, and 5 % of camera clean and all of troubleshooting.  $H = (20 \% \times 20 \%) + (5 \% \times 27 \%) + (5 \% \times 27 \%) + (5 \% \times 3 \%) + (5 \% \times 20 \%) + 1,4 \% = 9 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS7 – slew / swing start

H: 25 % of daily inspection and all of manoeuvring (travel / swing) in maintenance area and all of troubleshooting.  $H = (25 \% \times 27 \%) + 0,3 \% + 1,3 \% = 8 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS8 – slew / swing stop / hold still

H: 25 % of daily inspection, 50 % of machine wash, 50 % of camera clean and all rope change and all of troubleshooting.  $H = (25 \% \times 27 \%) (50 \% \times 3 \%) + (50 \% \times 20 \%) + 1 \% + 1,3 \% = 21 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS9 – travel hold still

H: All of rope change and all of troubleshooting.  $H = 1 \% + 1,3 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC0

DS10 – travel speed

H: All of manoeuvring (travel / swing) in maintenance area and all of troubleshooting.  $H = 0,3 \% + 1,4 \% = 2 \%$

P: Maintenance task on / off machine split.  $P = 75 \%$

AC: AC1 – E-stop

AW: AW2

AR: AR2

**T.2.2 Application use cases**

**Table T.2 — Application use case table**

Application	Truck loading	Excavation (no truck)	Traveling	Maintenance
dragline	5 %	95 %	5 %	5 %

**T.2.3 Maintenance task breakdown**

**Table T.3 — Maintenance task breakdown**

	Time (min/day)	% Maintenance time
access / egress machine	15	20 %
maneuvering (travel / swing) in maintenance area	0,25	0,3 %
daily inspection	20	27 %
refueling / refilling / fluid top off	20	27 %
rope change	0,6	1 %
oil sampling	1	1 %
machine wash	2	3 %

Table T.3 (continued)

	Time (min/day)	% Maintenance time
window wash	10	14 %
troubleshooting	1	1,4 %
camera clean	15	20 %

## T.2.4 Function dominant failure type matrix

Function-dominant failure type matrices reflect the approach that was taken during the MCSSA and outline where some truncation occurred. The notion is that some failure types result in the same hazardous outcomes as other failure types and, therefore, result in the same performance level required (e.g. failure to apply on demand and uncommanded deactivation of the park brake would result in the same hazardous outcome; park brake is off when the operator expects it to be on).

Table T.4 — Function dominant failure type matrix

Function	Failure to apply on demand	Failure to release on demand	Uncommanded activation	Uncommanded deactivation	Notes
left track forward			1		Failure to apply on demand, failure to release on demand, uncommanded activation, and uncommanded deactivation all result in an uncommanded steer.
left track back					It is the same as left track forward.
right track forward					It is the same as left track forward.
right track back					It is the same as left track forward.
travel speed			1		
engine speed			1		
hoist raise			1		
hoist lower			1		
hoist hold still	1				
crowd in			1		
crowd out			1		
crowd hold still	1				
bucket dump			1		It is only applicable to shovels - not drag lines.
slew / swing start			1		
slew / swing stop / hold still	1				
travel hold still	1				
powered access ladder movement			1		
powered access ladder interlock	1				Other failure types are considered no worse than failure to apply on demand.
machine lockout	1				
cable reel			1		Grid power only

NOTE A "1" has been placed in the cell for function - failure type combination that would or could potentially cause the most hazardous failure.

## T.2.5 Notes and assumptions

- Taking a bucket off a drag line and putting on a clam shell causes the machine to become a foundation excavation machine falling under ISO TC 195.

- Taking off a bucket and adding a wrecking ball, material handling, or other attachments is derivation defined in ISO 6165, but will not be assessed in this assessment. Manufacturers should assess these themselves.
- Using hydraulic shovel cycle times.
- This does not consider walking drag lines.

### T.3 MPL<sub>r</sub> mapped to SCS table

Table T.5 shows function-based MPL<sub>r</sub> (see Table T.1) mapped to SCS per the results of the MCSSA for a cable excavator (dragline). Other systems that fail in a way that cause a hazardous outcome similar to the function failures in Table T.1 would also be mapped to these MPL<sub>r</sub>.

Table T.5 — MPL<sub>r</sub> mapped to SCS

Machine function	Failure type	MPL re-quired	Example of mapped system
engine speed	uncommanded activation	c	throttle
crowd hold still	failure to apply on demand	c	crowd hold still
crowd in	uncommanded activation	c	crowd in
crowd out	uncommanded activation	c	crowd out
hoist hold still	failure to apply on demand	c	hoist hold still
hoist lower	uncommanded activation	c	hoist lower
hoist raise	uncommanded activation	c	hoist raise
left track forward	uncommanded activation	b	track motion
machine lockout	failure to apply on demand	c	machine lockout
powered access ladder inter-lock	failure to apply on demand	c	powered access ladder interlock
powered access ladder move-ment	uncommanded activation	b	powered access ladder movement
slew / swing start	uncommanded activation	c	slew / swing start
slew / swing stop / hold still	failure to apply on demand	c	slew / swing stop / hold still
travel hold still	failure to apply on demand	c	brake
travel speed	uncommanded activation	b	propel

## Annex U (normative)

### Compact trencher less than 4 500 kg performance level tables

#### U.1 Compact trencher less than 4 500 kg

Scores and percentages for S, A, H, P, E, AC, AW and AR and C are given in the tables for dominant scenarios along with the dominant  $MPL_r$  for the function. More details can be found in the subsequent subclause ([Tables U.1](#) to [U.4](#)) or in [Clause 5](#).

STANDARDSISO.COM : Click to view the full PDF of ISO/TS 19014-5:2021

Table U.1 — MPL<sub>r</sub> table for compact trencher less than 4 500 kg

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CTR1		loading / unloading / transport	uncommanded activation	machine steers without input and moves off side of trailer	operator	S1	10 %	50 %	100 %	E1	AC1	AW2	AR1	C3	<b>b</b>
CTR2	<b>counter steer</b>	loading / unloading / transport	uncommanded activation	machine steers without input and moves off side of trailer	co-worker	S2	10 %	50 %	5 %	E0	AC1	AW2	AR1	C3	
CTR3		loading / unloading / transport	uncommanded activation	machine steers without input and moves off side of trailer	bystander	S2	10 %	50 %	10 %	E0	AC1	AW2	AR1	C3	
CTR4	<b>articulated steer</b>	travel	uncommanded activation	machine becomes unstable on side-slope	operator	S3	30 %	2,5 %	100 %	E0	AC1	AW2	AR2	C2	<b>b</b>
CTR1-3	<b>Ackermann steer - front only</b>			considered same as counter steer uncommanded activation											<b>b</b>
CTR1-3	<b>Ackermann steer - rear only</b>			considered same as counter steer uncommanded activation											<b>b</b>
CTR1-3	<b>Ackermann steer - front and rear combined</b>			considered same as counter steer uncommanded activation											<b>b</b>

Table U.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CTR5		boring	uncommanded activation	machine or boring components move unexpectedly and contact co-worker	co-worker	S2	50 %	2 %	25 %	E0	AC1	AW2	AR1	C3	
CTR6	<b>propel - speed</b>	preparation/ set up	uncommanded activation	Machine moves (powered) unexpectedly. Only hazardous to pedestrian operator and machine moving towards them.	operator	S2	5 %	40 %	100 %	E1	AC1	AW2	AR2	C2	<b>b</b>
CTR7	<b>direction (F / R)</b>	micro-trenching	uncommanded activation	machine contacts co-worker	co-worker	S2	80 %	12,5 %	10 %	E1	AC1	AW2	AR2	C2	<b>b</b>
CTR8		Loading / unloading / transport	failure to apply on demand	machine does not stop and goes off trailer	co-worker	S2	10 %	5 %	5 %	E0	AC1	AW2	AR1	C3	<b>b</b>
CTR9	<b>slow/stop</b>	Loading / unloading / transport	failure to apply on demand	machine does not stop and goes off trailer	bystander	S2	10 %	5 %	10 %	E0	AC1	AW2	AR1	C3	<b>b</b>
CTR10		travel	uncommanded activation	machine stops suddenly and unexpectedly	operator	S0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	<b>QM</b>
CTR11		Loading / unloading / transport	uncommanded activation	machine stops suddenly and unexpectedly	operator	S0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	<b>QM</b>

Table U.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
CTR12	hold still	preparation/ set up	uncommanded deactivation	Machine moves (unpowered) unexpectedly. On pedestrian controlled machines, it comes into contact with the operator.	operator	S1	5 %	10 %	100 %	E0	AC1	AW1	AR0	C3	a	
CTR13		preparation/ set up	uncommanded deactivation	machine moves (unpowered) unexpectedly and makes contact	co-worker	S1	5 %	10 %	10 %	E0	AC1	AW1	AR0	C3	a	
CTR14		preparation/ set up	uncommanded activation	contacted by blade resulting in crushed limb	co-worker	S1	5 %	100 %	2 %	E0	AC1	AW1	AR0	C3	a	
BH4-5	hoe arm in			considered the same as backhoe loader												c
BH4-5	hoe arm out			considered the same as backhoe loader												c
CTR15	backhoe swing	backhoe	uncommanded activation	contacted by linkage	co-worker	S2	10 %	50 %	10 %	E0	AC1	AW2	AR1	C3	b	
CTR16	boom down	backhoe	uncommanded activation	contacted by linkage	co-worker	S2	10 %	25 %	2 %	E0	AC1	AW2	AR1	C3	b	
BH3	boom up			considered the same as backhoe loader												c
BH3	raise - backhoe stabilizer			considered the same as backhoe loader												c
CTR17	lower - backhoe stabilizer	backhoe	uncommanded activation	contacted by stabilizer linkage	co-worker	S1	10 %	50 %	2 %	E0	AC1	AW2	AR1	C3	a	
CTR18	raise - reel carrier			no worse than urban / lower-reel carrier / trenching / uncommanded activation / operator												a

Table U.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>	
CTR18	lower - reel carrier	trenching	uncommanded activation	Lowering reel carrier raises machine. Machine tips onto operator limbs.	operator	S2	90 %	1 %	100 %	E0	AC1	AW2	AR2	C2	a	
CTR19		trenching	uncommanded activation	machine tips onto co-worker limbs	co-worker	S2	90 %	1 %	2 %	E0	AC1	AW2	AR2	C2		
CTR20	power wind / unwind - reel carrier	trenching	uncommanded activation	Co-worker gets hands pinched in reel material in reel material guide.	co-worker	S0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	QM	
CTR20	brake - reel carrier	no worse than urban / power unwind / wind-reel carrier / trenching / uncommanded activation / co-worker														QM
CTR21	side shift - rear attachment	travel	uncommanded activation	machine becomes unstable and tips contacting operator	operator	S2	30 %	2 %	100 %	E0	AC1	AW2	AR1	C3	b	
CTR22		preparation/ set up	uncommanded activation	machine becomes unstable and tips, contacting operator	operator	S2	5 %	4 %	100 %	E0	AC1	AW2	AR0	C3		
CTR23	raise - rear attachment	trenching	uncommanded activation	powered trenching tool (chain or wheel) comes out of trench and co-worker contacts, entanglement into tool	co-worker	S3	90 %	20 %	5 %	E0	AC1	AW2	AR2	C2	b	
CTR23	lower - rear attachment	no worse than rear attachment raise														b
CTR24	speed - rear attachment	no worse than rear attachment on / off														c
CTR24	on / off - rear attachment	preparation/ set up	uncommanded activation	co-worker is contacted with rear attachment before in trench	co-worker	S3	5 %	80 %	5 %	E0	AC1	AW2	AR1	C3	c	

Table U.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
	direction - rear attachment			no significant hazard											
CTR25	on / off - boring	boring	uncommanded activation	Using on / off of rear attachment to identify on / off of boring system. Hazard is that co-worker is struck by rod or entangled in rod.	co-worker	S2	50 %	2 %	25 %	E0	AC1	AW2	AR1	C3	b
CTR21	swing - plow		no worse than residential	side shift-rear attachment / travel / uncommanded activation / operator											b
	steer - plow			no significant hazard											
	raise - plow			no significant hazard											
	lower - plow			no significant hazard											
	float - raise / lower - plow			no significant hazard											
	float - swing - plow			no significant hazard											
CTR23	raise - microtrencher		no worse than urban	raise rear attachment / trenching / uncommanded activation / co-worker											b
CTR23	lower - microtrencher			no worse than microtrencher	raise										b
CTR21	side shift - microtrencher		no worse than residential	side shift-rear attachment / travel / uncommanded activation / operator											b
	level - microtrencher			no significant hazard											
	depth - microtrencher			no significant hazard											
CTR24	speed - microtrencher			no worse than microtrencher	on/off										c

Table U.1 (continued)

Ref #	Machine function	Use case	Failure type	Hazardous outcome	Person exposed	S	A variable	H variable	P variable	E	AC	AW	AR	C	MPL <sub>r</sub>
CTR24	on / off - microtrencher		no worse than urban	on / off rear attachment / preparation / setup / uncommanded activation / co-worker											c
	rotation direction - microtrencher				no significant hazard										

## U.2 Supporting explanation

### U.2.1 Supporting explanations for dominant scenarios

#### CTR1 – counter steer

H: Only in one direction. H = 50 %

P: Operator present during the whole cycle. P = 100 %

AC: AC1 - Can stop machine or ground tool

AW: AW2

AR: AR1

#### CTR2 – counter steer

H: Only in one direction. H = 50 %

P: People should not be in this area but may be momentarily. P = 5 %.

AC: AC1 - Can stop machine or ground tool

AW: AW2

AR: AR1

#### CTR3 – counter steer

H: Only in one direction. H = 50 %

P: Used a higher P value for bystander in urban application because more people may be passing through the hazard area. P = 10 %

AC: AC1 - Can stop machine or ground tool

AW: AW2

AR: AR1

#### CTR4 – articulated steer

H: It is considered machine abuse for the operator position to be on downhill slope of machine during travel. 10 % of travel time is across slopes and 25 % of this time the operator station is on the downhill side.  $H = 25 \% \times 10 \% = 2,5 \%$

P: Operator present during the whole cycle. P = 100 %

AC: AC1 - Key switch or release controls

AW: AW2

AR: AR2

#### CTR5 – propel speed

H: 2 % of boring work cycle. Occurs at need to addition rods (no rotation) or only during the initial insert of the tool into the ground (rotation).

P: Co-worker is present only when rod guide is required or additional rods are needed, which is only 25 % of boring activities. P = 25 %

AC: AC1 - Key switch or reverse direction

AW: AW2

AR: AR1

CTR6 – propel speed

H: 80 % of time the machine is not moving during prep. Only hazardous when it moves towards a pedestrian operator in one direction.  $H = 80 \% \times 50 \% = 40 \%$

P: Operator present during the whole cycle.  $P = 100 \%$

AC: AC1 – Engage service brake, key switch, or reduce engine speed

AW: AW2

AR: AR2

CTR7 – direction (F / R)

H: Hazard zone is only directly behind machine, 50 % of the quadrant (25 %).  $H = 25 \% \times 50 \% = 13 \%$

P: Only in the hazard zone 10 %.  $P = 10 \%$

AC: AC1 – Engage service brake, key switch, or reduce engine speed

AW: AW2

AR: AR2

CTR8 – slow/stop

H: Co-worker can on one of the 4 sides and only a portion of that is the hazard zone.  $H = 5 \%$

P: People should not be in this area but may be momentarily.  $P = 5 \%$ .

AC: AC1 – Engage service brake, engage park brake, reduce engine speed

AW: AW2

AR: AR1

CTR9 – slow/stop

H: Co-worker can on one of the 4 sides and only a portion of that is the hazard zone.  $H = 5 \%$

P: People should not be in this area but may be momentarily and more people than the co-worker are considered.  $P = 10 \%$ .

AC: AC1 – Engage service brake, engage park brake, reduce engine speed

AW: AW2

AR: AR1

CTR10 – slow/stop

H: N/A

P: N/A

AC: N/A

CTR11 – slow/stop