

**SAE** The Engineering  
Resource For  
Advancing Mobility®

400 COMMONWEALTH DRIVE, WARRENDALE, PA 15096

**AEROSPACE  
INFORMATION  
REPORT**

**AIR 1662**

Issued October 1984  
Revised

MINIMIZATION OF ELECTROSTATIC HAZARDS IN AIRCRAFT FUEL SYSTEMS

TABLE OF CONTENTS

	<u>PAGE</u>
1. INTRODUCTION . . . . .	2
2. PHYSICS OF ELECTROSTATIC CHARGE GENERATION AND ACCUMULATION IN AIRCRAFT FUEL SYSTEMS . . . . .	3
3. INCENDIVITY OF ELECTROSTATIC DISCHARGES . . . . .	8
4. CRITERIA FOR IGNITION . . . . .	11
5. CAUSE AND PREVENTION OF ELECTROSTATIC HAZARDS IN AIRCRAFT . . . . .	19
6. DESIGN AND OPERATING RECOMMENDATIONS . . . . .	24

PREPARED BY  
SAE COMMITTEE AE-5,  
AEROSPACE FUEL, OIL AND OXIDIZER SYSTEMS

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

- 2 -

1. **INTRODUCTION:** The prevention of fires and explosions resulting from electrostatic discharges in aircraft fuel systems is of special concern to aircraft designers and operators. The purpose of this Aerospace Information Report (AIR) is to assist in reducing the hazard by a review of the physics of electrostatic phenomena, a brief survey of electrostatic incidents and accidents, and a recounting of design practices which reduce the hazard. This document is not a complete design guide; extensive research and testing will be required to produce a successful design.

An excellent review of the literature by Leonard (Ref. 1) and a record of experiences and practices by the American Petroleum Industry (API, Ref. 2) are useful supplements. The API has summarized the conditions necessary for an incendiary electrostatic discharge as follows:

- o There must be a mechanism to generate electrostatic charge
- o There must be a means to accumulate electrostatic charge in enough quantity to produce an incendiary spark
- o There must be a means of discharging the accumulated electrostatic charge in the form of an incendiary spark, that is, a spark gap
- o There must be a combustible vapor in the spark gap

The hazard, then, may be eliminated by designing to prevent one or more of these necessary conditions.

SAENORM.COM : Click to view the full PDF of air1662

- 3 -

2. PHYSICS OF ELECTROSTATIC CHARGE GENERATION AND ACCUMULATION IN AIRCRAFT FUEL SYSTEMS: When a hydrocarbon liquid such as jet fuel flows past a surface, positive and negative electrostatic charges can be separated along the surface. While the precise nature of the charging mechanism is not known, it appears to be associated with the presence of minute quantities of ionic impurities in the hydrocarbon. Ionic impurity mechanisms for charge generation on either metallic or non-metallic surfaces have been proposed by Leonard and others (Ref 1); whatever the actual mechanism, it is an observed fact that a hydrocarbon liquid flowing over a surface can acquire a charge, with the contact surface acquiring the opposite charge. Figure 1 shows a pipe wall with an affinity for

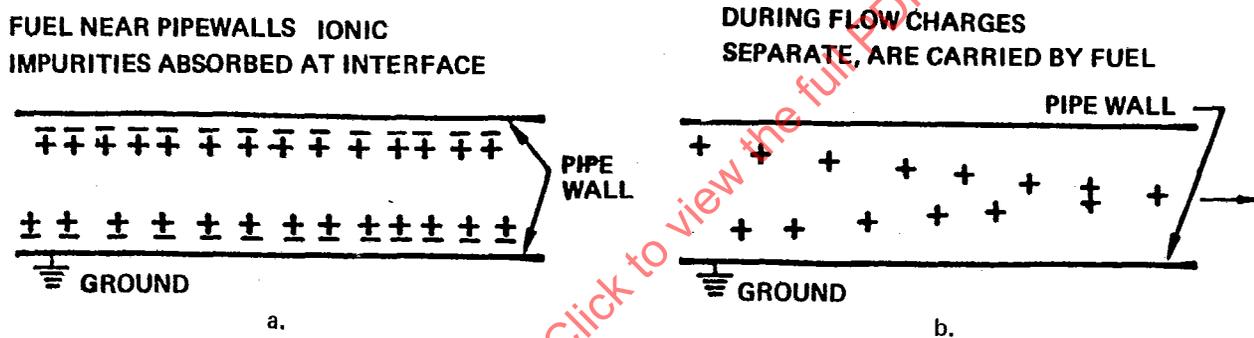


Figure 1. Proposed Charge Generation Mechanism (Ref 1)

- (a) Fuel Near Boundary Experiences Absorption of Ionic Impurities at Pipe Wall  
 (b) Separation of Charge as Fuel Flows Through Pipe

negative charge, resulting in a net positive charge in the body of the fuel. If the fuel is set into motion and charge is separated, the immediate re-association of the separated charges is hindered by the very low electrical conductivity of highly refined hydrocarbon fuels. Charge is therefore convected away by the liquid flow, in opposition to the electric field between the liquid and its surroundings, creating a potentially hazardous condition. Whether the fuel becomes positively charged (as shown in Figure 1) or negatively charged depends on the combination of fuel, impurities and containers involved.

- 4 -

One of the main charge generators during aircraft refueling is the ground refueling equipment dirt filter/water coalescer-separator unit (Fig. 2);

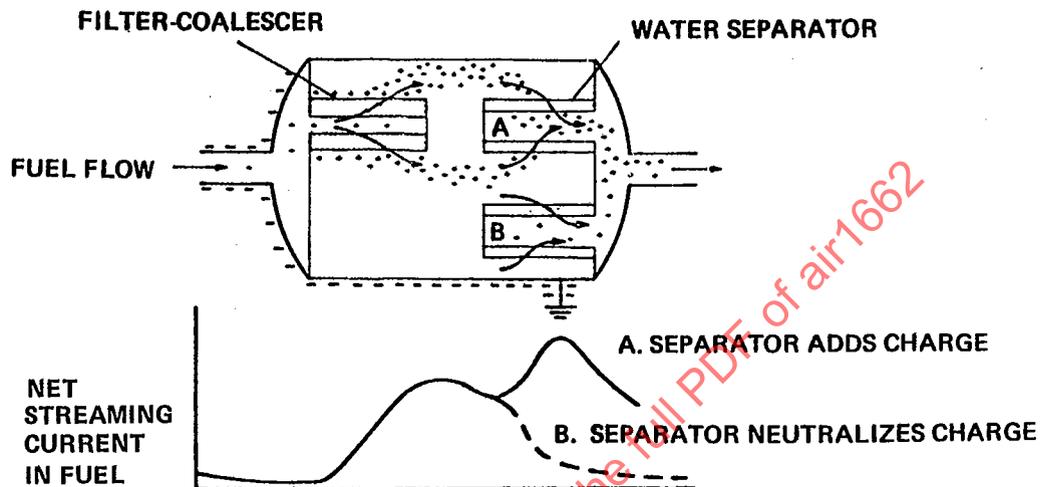


Figure 2. Charge Separation in a Filter/Separator (Ref 1)

the separator may add to the charge produced by the filter-coalescer (Fig. 2a) or tend to neutralize it (Fig. 2b); with another fuel, the net charge produced might be of opposite sign. In general, any filter has the potential to be a prolific charge generator because of the very large surface areas involved.

- 5 -

As charged fuel flows through refueling hoses and pipes and enters the aircraft tanks (Fig. 3), charges have an opportunity to be eliminated by

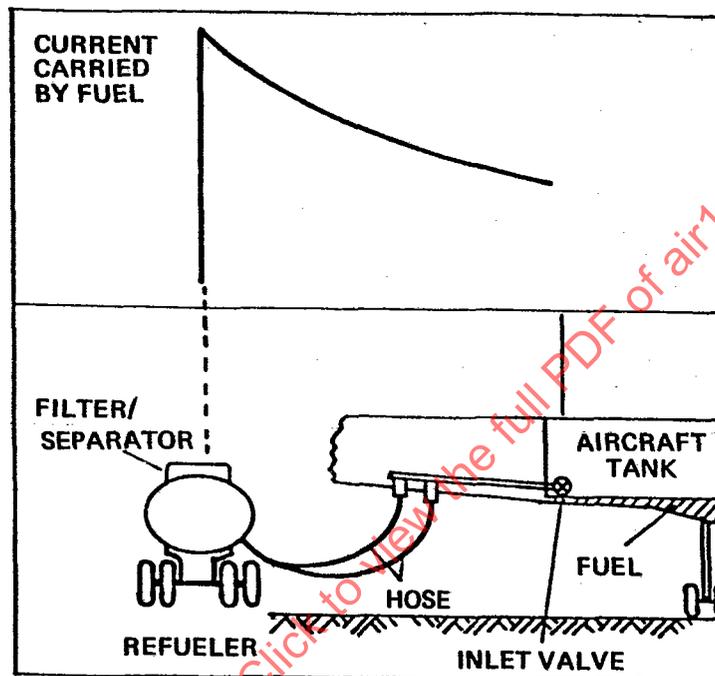


Figure 3. Generation and Neutralization of Electrostatic Charge During Aircraft Fueling (Ref 1)

migrating to the walls and re-associating with the opposite charge, a process described as relaxation. The process of the recombination of charges can be described as a function of time. If the fuel flows into a grounded container, and if the flow is terminated after a total charge  $Q_0$  has been accumulated in the container, experiments show that the mutual repulsion of the like charges in the fuel tends to cause them to migrate in the direction of the liquid fuel boundaries which are the

- 6 -

normally grounded container walls and the electrically isolated fuel-air interface. The charge remaining in the container after a time  $\tau$  from the start of an observation interval can be approximated as

$$\frac{Q_{\tau}}{Q_0} = e^{\frac{-\tau k}{\epsilon_0 \epsilon}}$$

where  $Q_0$  is the initial charge (Coulombs)  
 $Q_{\tau}$  is the charge at time  $\tau$  (Coulombs)  
 $\tau$  is elapsed time (seconds)  
 $k$  is the fuel rest electrical conductivity (Siemens/m)  
 $\epsilon$  is the relative dielectric constant compared to vacuum (for hydrocarbons,  $\epsilon \sim 2$ )  
 $\epsilon_0$  is the dielectric constant of vacuum ( $8.854 \times 10^{-12}$  ampere seconds/volt meter)

It is customary to quote a characteristic "relaxation" time for electrical charges, normally the time required for the original charges to be reduced by a factor  $1/e$  as they flow to the grounded walls. Defining the relaxation time as  $\zeta$ , it follows that

$$\frac{\zeta k}{\epsilon_0 \epsilon} = 1 \quad \text{or} \quad \zeta = \frac{\epsilon_0 \epsilon}{k} \sim \frac{18 \times 10^{-12}}{k}$$

It is also customary to describe the electrical conductivity of fuel in terms of conductivity units (CU)

1 CU = 1 piconSiemen/meter (pS/m)  
 =  $10^{-12}$  Siemen/meter  
 =  $[10^{12} \text{ ohm meter}]^{-1}$

Jet fuel electrical conductivity without antistatic additive normally ranges from 0.1 to 20 CU (Ref. 1), so that typical relaxation times range from 180 to 0.9 seconds according to the above equation. In actuality, the relaxation time for fuels of very low conductivity is shorter than the prediction of the equation, and accepted practice is that 30 seconds is sufficient to remove most of the charge from fuel after the end of a filtering operation (Ref. 2).

- 7 -

During fuel flow into a receiver such as an aircraft fuel tank, charge may be introduced with the fuel at the same time that the charge already present is relaxing. If the charging rate is more rapid than the rate of relaxation, then charge will continue to accumulate in the tank and create potentially hazardous situations. As shown in Figure 4, the residual

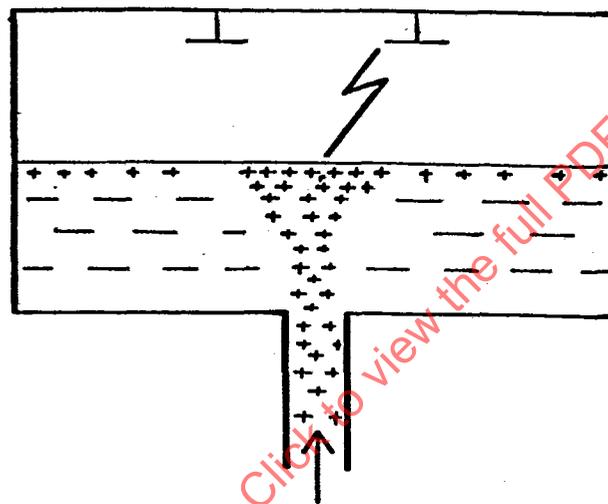


Figure 4. Discharge from Fuel Surface to Tank (Ref 1)

charge which migrates toward the fuel-air interface tends to produce a charged region near the surface, causing strong electric fields which can lead to discharges to nearby grounded objects.

In some military aircraft which contain explosion suppressant foam in their tanks, charge may also be produced within the fuel tank depending on how the refueling flow is introduced into the tank. Even though the fuel may not be charged as it enters the tank, if the incoming fuel impinges on the foam with substantial flow rate or velocity, the foam presents a very


- 8 -

large surface area on which charges can be separated. One charge type will reside on the foam, while the opposite charge will be convected away as the fuel percolates through the foam. In this case, the charge residing on the foam is the principal hazard, and can be of either polarity depending on the type of foam used.

3. INCENDIVITY OF ELECTROSTATIC DISCHARGES: The strength of the electric field produced in the vapor space (ullage) above a fuel is roughly proportional to the quantity of charge present. If the electric field strength reaches a critical value, called "the breakdown value", a discharge will occur.

In case a discharge occurs from a dielectric surface (such as fuel explosion suppressant foam, or a convenient experimental analogue such as plexiglas) to a grounded metal object in the vapor space, only the charge on or near the dielectric surface will be involved, and further, only limited areas on the charged surface will participate (Fig. 5); the reason is that the mobility of charge in the dielectric is very low because of the low conductivity of the dielectric and because of the short duration of discharges. It has also been observed that the discharge at its origin at the dielectric surface is diffuse, tending to coalesce into a bright filament in the vicinity of the metal object. In a number of instances, simultaneous multiple discharges have been observed in experiments with plexiglas; indirect measurements suggest the same phenomenon occurs in discharges from fuel.

Under some circumstances, a dielectric can discharge to a metal object with little hazard. In these circumstances, a design which prompts a low intensity discharge or discharges which can relax the electric field may be beneficial. Under other consequences the discharge may be incendiary. The difference between the circumstances may be due to more than a single variable in practical fuel system designs.

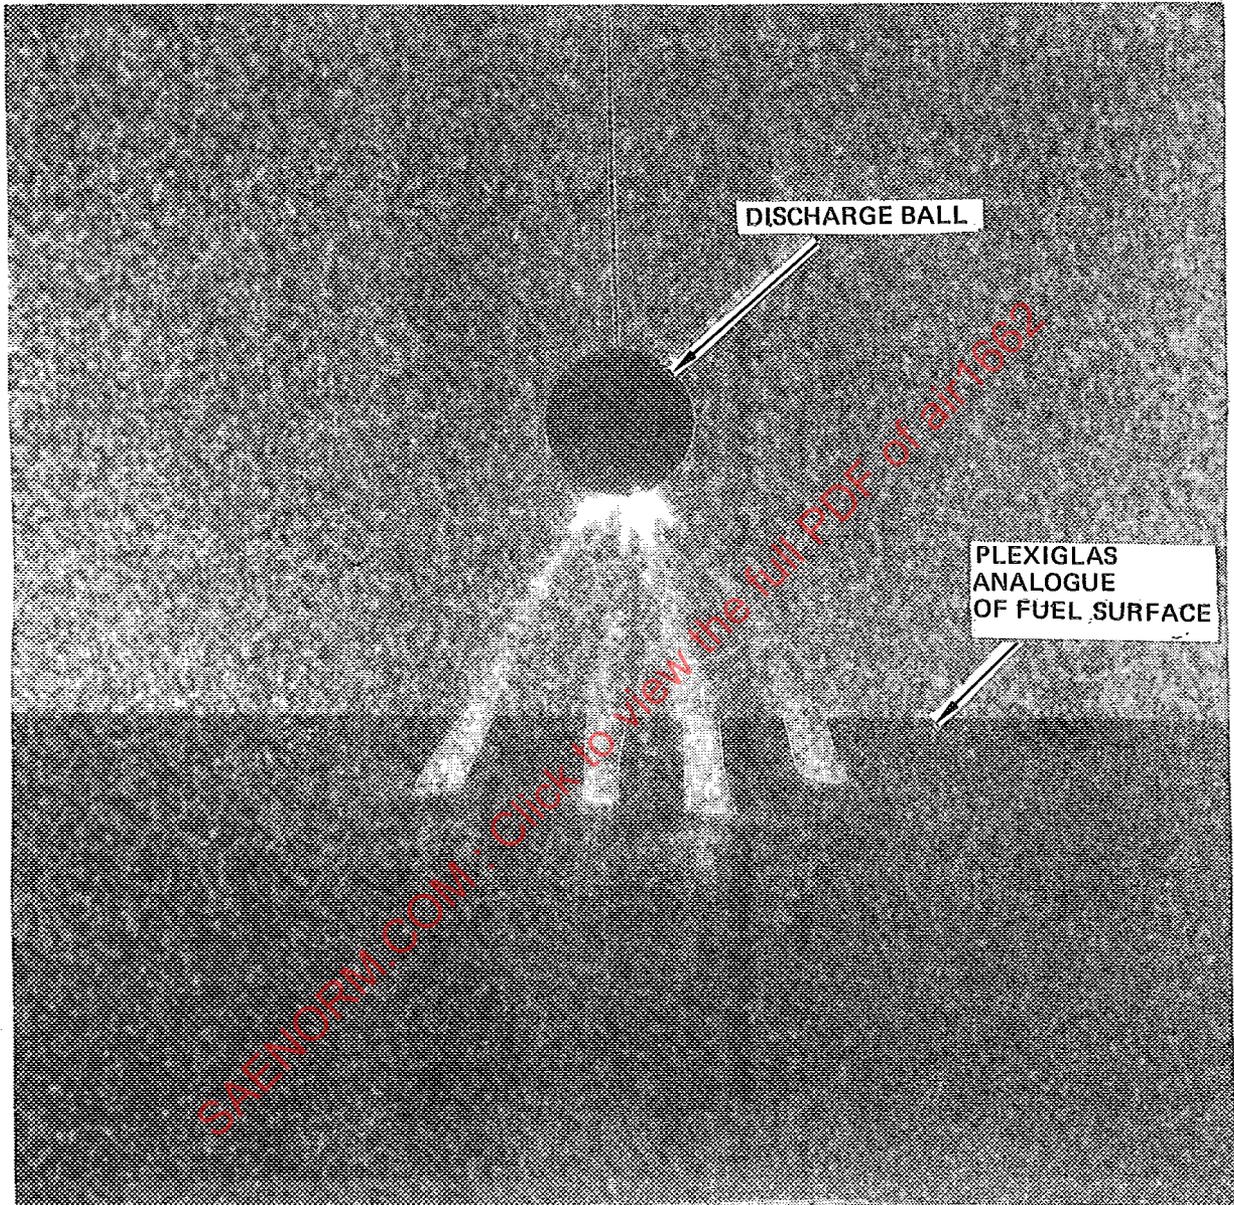

*Figure 5. Multiple Discharges from Dielectric Surface (Ref 6)*

- 10 -

Discharges in fuel tanks may also be from one metal surface to another. If a fuel or foam surface comes in contact with an ungrounded metal object in the fuel tank, some of the charge contained in the fuel or foam will migrate into the metal object (Fig. 6). If the accumulation of charge on

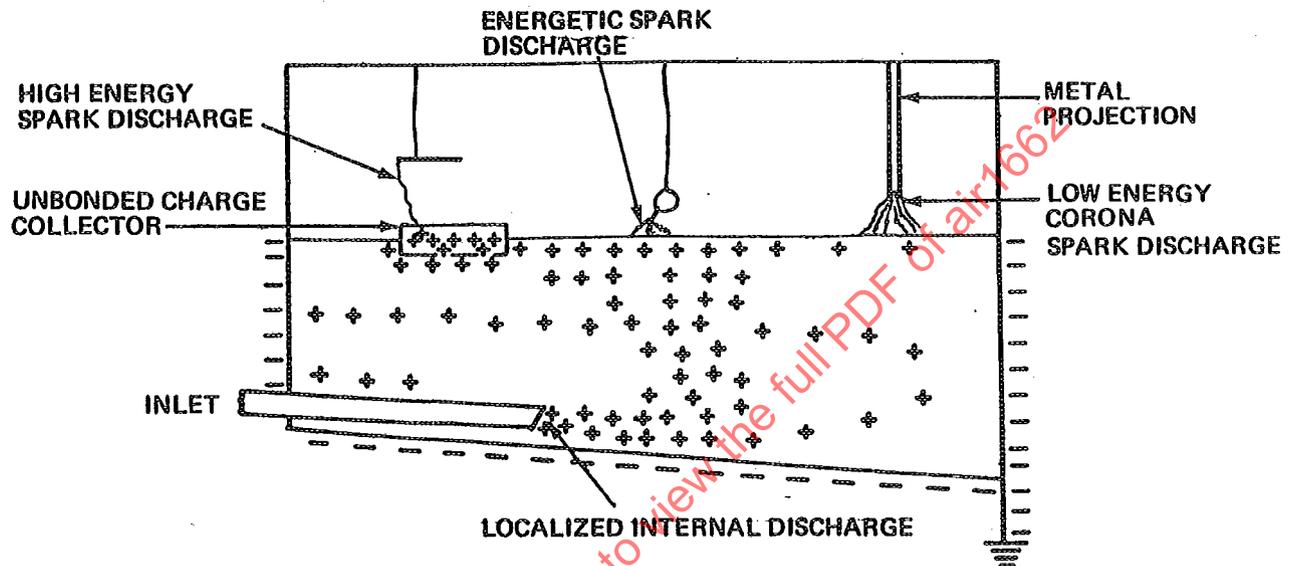


Figure 6. Sources of Static Discharge in a Tank

the ungrounded metal object causes its voltage to reach a sufficient value, it can in turn discharge to a grounded metal object; a tight arc will result and all of the charge collected will be transferred in a very short time. Because of the length and temperature of the arc, this situation can be very hazardous.

- 11 -

4. CRITERIA FOR IGNITION: The probability of an electrostatic ignition event depends on whether the discharge occurs between metal objects, or between a dielectric (e.g., fuel, explosion suppressant foam) and a metal object, and on the flammability of the ullage, the energy of the discharge, and the energy density (energy per unit volume) of the discharge.

4.1 Metal to Metal Discharge - Ignition Criteria: This situation can arise in fuel tanks when a discharge occurs between an ungrounded object in contact with fuel (or explosion suppressant foam) and a grounded metal object in the ullage space; such discharges have high energy density. It is possible to measure the voltage ( $V_B$ ) at the time of this discharge, and to measure the capacitance ( $C$ ) of the system comprised of the metal objects. With this data, the energy ( $E$ ) stored in the system immediately prior to discharge can be calculated:

$$E = \frac{1}{2} CV_B^2$$

By varying fuel-air ratio and the configuration of the metal objects, the minimum ignition energy and most easily ignited (optimum) fuel-air ratio could be found, at least in principle (Fig. 7).

SAENORM.COM : Click to view the full PDF of air 1662

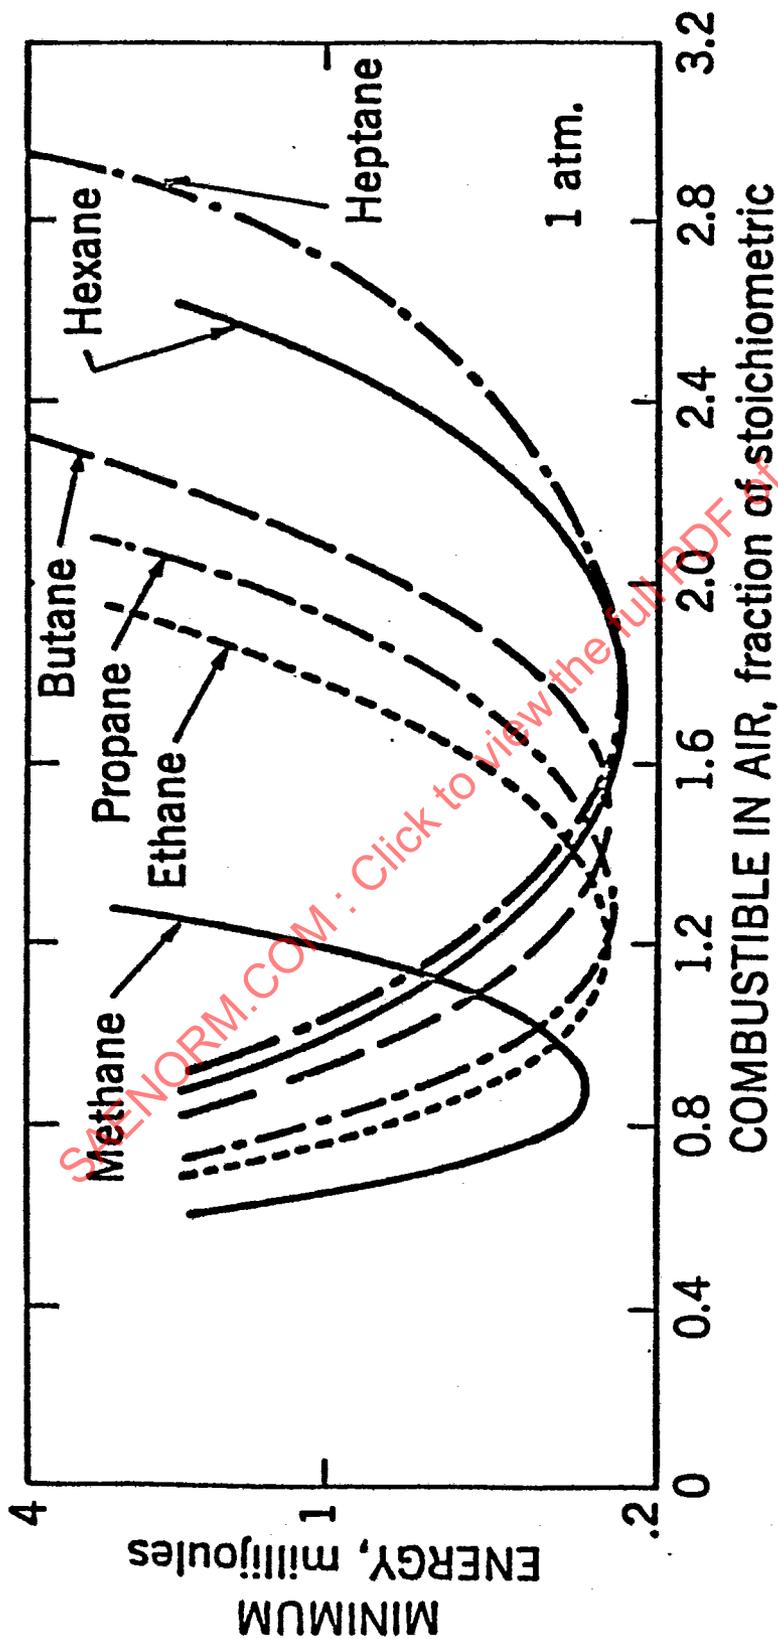


Figure 7. Spark Ignition Energy vs Mixture Composition for Mixture of Various Straight Chain Saturated Hydrocarbons with Air at 1 Atmosphere (Ref 9)

- 13 -

In actuality, the experiment just described has not been performed, and instead tests have been made using the configuration of Figure 8.


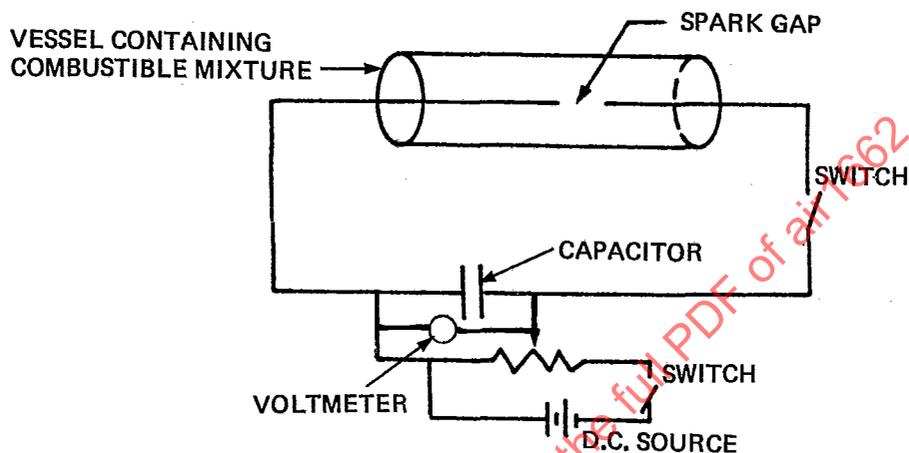


Figure 8. Schematic of Standard Minimum Energy Measurement Apparatus

A reaction vessel containing two electrodes is filled with a fuel-air mixture. The electrodes are connected through a switch to a capacitor which can be charged to various voltages. The above equation is used to compute the energy stored in the capacitor, and this energy is assumed to be dissipated in the gap between the electrodes during the discharge. As the result of measurements of this type, the minimum ignition energy that has been calculated is 0.26 millijoules (mJ) for glass flanged metal electrodes with a 0.5 cm gap and the optimum hydrocarbon fuel-air ratio (Ref. 3). If the gap distance, mixture ratio or electrode geometry are changed, the ignition energy will also change. The cited value (0.26 mJ) is usually taken as the minimum ignition energy, and any configuration in a fuel tank with values of  $C$  and  $V_B$  which cannot exceed this energy value is usually regarded as safe.

However, the assumption that all the capacitor's stored energy is dissipated in the gap is questionable. By measuring the extremely short discharge times from an oscilloscope trace (Fig. 9), it is clear that

- 14 -

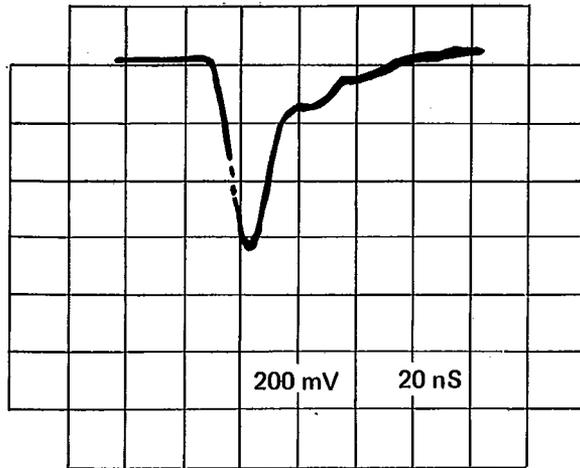

TEST CONDITIONS :

- DISCHARGE FROM FOAM SPECIMEN
- 1 INCH BALL
- 0.7 INCH GAP

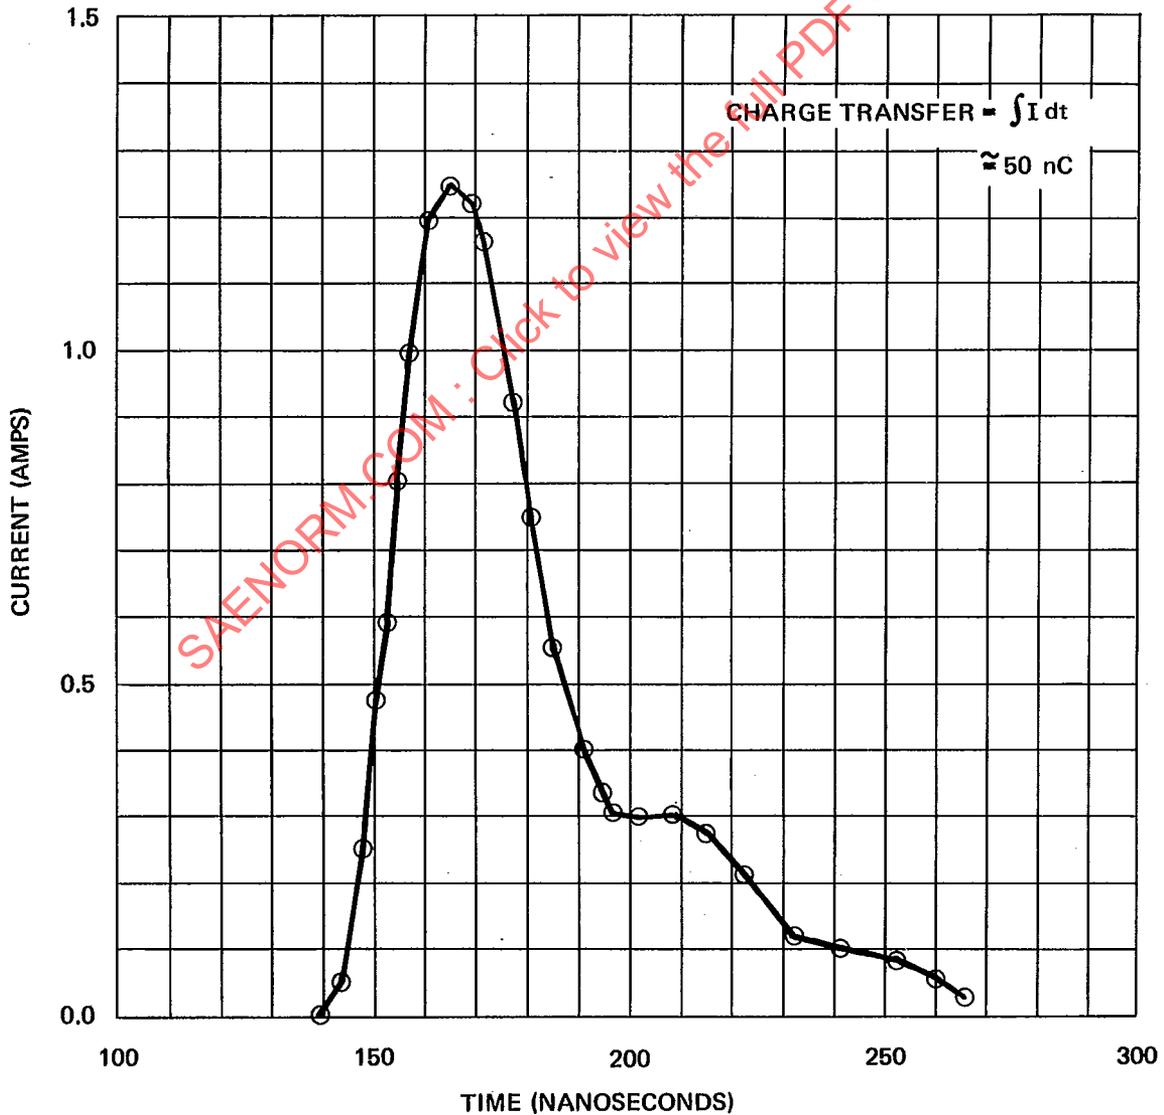


Figure 9. Typical Oscillograph Trace and Trace After Data Reduction (Ref 6)

- 15 -

very high frequency phenomena are involved, and that substantial amounts of energy can be expected to be radiated by the wires carrying the capacitor energy to the gap. Estimates are that between 10 and 50% of the capacitor energy can be radiated (Ref. 4); thus the actual energy dissipated in the gap at the minimum ignition condition may be less. A series of experiments using the first proposed configuration would go far to resolve this uncertainty.

- 4.2 Dielectric to Metal Discharge - Ignition Criterion: This situation applies to the case of discharges from a foam or fuel surface to a grounded metal object in the ullage space. In such discharges, the energy density is low near the dielectric, and high near the metal object. Measurement of the voltage and capacitance of a dielectric surface relative to a metal object is essentially impossible, so the techniques of Section 4.1 are not useful in making minimum ignition energy determinations. Discharge energy could also be calculated if the product of current and voltage could be integrated over the time of discharge; while the current can be measured (Fig. 9), as already noted the voltage cannot. Some estimates of spark energy have been made using a photomultiplier to observe incendiary sparks; these estimates show that an energy of 4.7 mJ is sufficient for ignition, but this value is not necessarily the minimum ignition energy (Ref. 5).

As an alternative to spark energy, the total charge transferred during an event has been proposed as a measure of spark incendivity for dielectric-metal discharges. The total charge transferred is easily computed by integrating current vs. time during the discharge event; this calculation involves finding the area under the curve of Figure 9. In measurements of discharges from explosion suppressant foams separated from a 1 inch (2.5 cm) diameter metal sphere by a 1/2 inch (1.2 cm) air gap, the minimum ignition charge transfer for an optimum propane/air mixture was approximately 45 nanoCoulombs (nC), and for JP-4 vapor/air was 70nC (Ref. 6); no lower values have been reported in the literature.

- 16 -

- 4.3 Influence of Temperature: The influence of temperature on minimum ignition energy has been investigated. The preponderant effect of temperature is traceable to its effect on the fuel-air ratio in the ullage space of fuel tanks. For situations in which the fuel is at equilibrium with its vapor, an increase in temperature increases the fuel vapor pressure and thus the fuel/air ratio (Fig. 10). The flammability


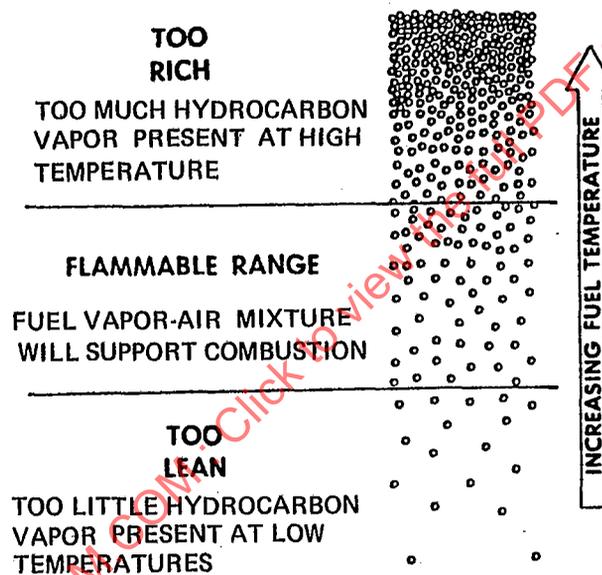


Figure 10. Flammability Concept (Ref 1)

- 17 -

limits of common fuels (including aviation gasoline and diesel fuel marine) are shown in Figure 11; evidently the vapor space

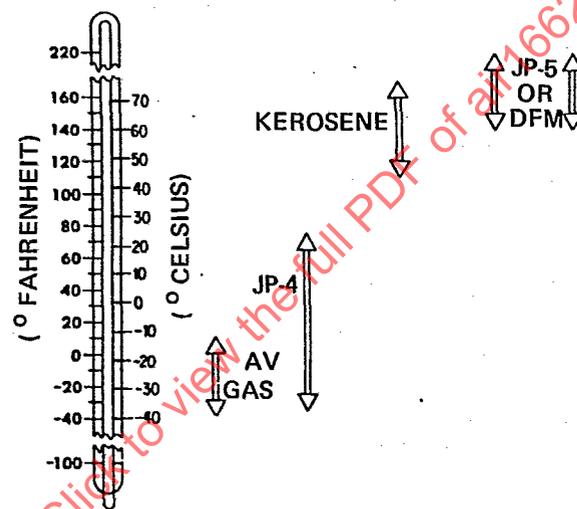

**Figure 11. Approximate Temperature Flammability Limits for Common Fuels. This is the Fuel Temperature Range at Sea Level Within Which the Vapor in Equilibrium With the Fuel will Form a Flammable Mixture With Air. (Ref 1)**

- 18 -

is not flammable when the fuel/air ratio is below the lean limit or above the rich limit, independent of spark ignition energy. Within the flammable zone, there is an optimum fuel/air ratio at which the fuel is most easily ignited, and above or below which the ignition energy required increases. Figure 12 shows the decrease in minimum ignition energy with increased temperature for a fuel-air spray.

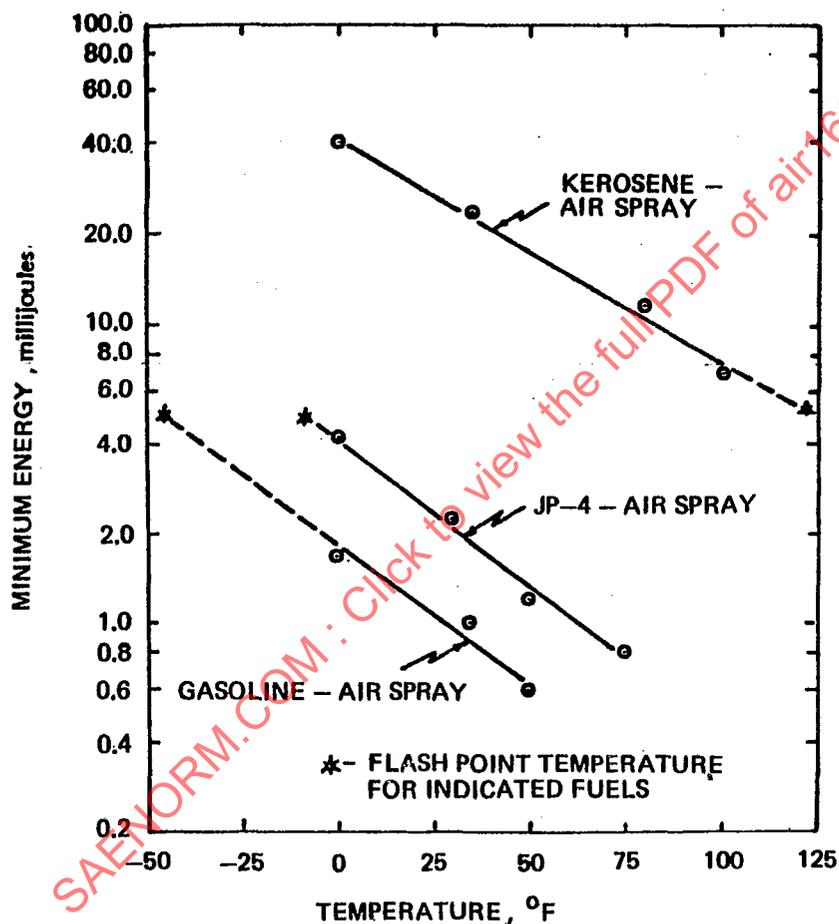


Figure 12. Minimum Spark Ignition Energies for Fuel/Air Spray Mixtures (Ref 1)

- 4.4 Effects of Fuel Mists: In the event that the fuel is not in equilibrium with its vapor, the usual temperature-vapor pressure expression for fuels does not apply. This is of special concern at temperatures where equilibrium relations would indicate the fuel-air ratio is too lean to burn. For example, in high speed fueling when mists can be created in the vapor space, the fuel mist can produce a flammable condition even at very low temperatures. This is because the vapor pressure in proximity

- 19 -

to a fuel droplet can be significantly higher than the vapor pressure of the bulk fuel. The effect is given, at least approximately, by the following equation (Ref. 7):

$$\ln \left( \frac{p}{p_0} \right) = \frac{2M\gamma}{RT\rho r} \quad \text{where:}$$

M is the droplet mass  
 p is the droplet vapor pressure  
 p<sub>0</sub> is the bulk fuel vapor pressure  
 R is the gas constant (for air to the accuracy of the equation)  
 T is the temperature (absolute)  
 r is the droplet radius  
 ρ is the fuel density  
 γ is the fuel surface tension

This increase in vapor pressure in mist filled ullages accounts for the flammability of fuel mists of otherwise room temperature safe fuels such as kerosene. Figure 12 shows that kerosene-air sprays can be ignited at temperatures well below the commonly accepted flash point.

5. CAUSE AND PREVENTION OF ELECTROSTATIC HAZARDS IN AIRCRAFT: A number of mechanisms have been identified which can introduce electrostatic charge into fuel tanks. As soon as charge is introduced, there is a tendency (because of the resultant electric fields) for the charges to separate from each other, and to migrate toward grounded metal surfaces. For a given electric field, the mobility of the charges varies directly as the fuel conductivity. If the rate of introduction of charge exceeds the rate at which charge either migrates to the walls or is otherwise neutralized, charge will accumulate, the resultant electric fields will intensify, and a discharge will result. If there are flammable vapors present and if the discharge has sufficient energy, an ignition may occur.
- 5.1 Causes of Electrostatic Hazards: The cause of electrostatic hazards is traceable to mechanisms to generate charge and to permit the charge to accumulate. These mechanisms are not always obvious.
- o Fuel flowing through a pipe at high velocity will acquire a net charge. If the pipe is metal and grounded, the opposite charge which is left on the pipe surface will flow to ground. If the pipe is a non-conductor such as nylon or teflon, not only is charge carried off by the fuel, but in addition the opposite charge will build up on the surface of the pipe, and can accumulate to the point that pinhole electrostatic discharge punctures of the pipe itself are produced.
  - o In aircraft ground refueling systems, the filter-separators used to remove dirt and water present large surface areas over which charge can separate in flowing fuel. In hydrant or tank truck refueling systems, the filter separator can create up to 200 times the charging rate that would otherwise occur in the refueling lines (Ref. 2).

- 20 -

o Some military aircraft use explosion suppressant foam in their fuel tanks to reduce combat vulnerability. These foams are a sponge-like material composed of skeletal networks of tiny lightweight strands of polyester-polyurethane or polyether-polyurethane. Unless precautions are taken, entering fuel can impinge on the foam and depending on the porosity of the foam, the impingement velocity, and the surface area impinged upon, can constitute a potent charge generator. In such a case, as with plastic pipes, one charge is left on the foam, and charge of the opposite sign is convected away by the fuel. The charge which resides on the foam (which is a good insulator) cannot easily migrate to ground, and so can quickly accumulate to levels where an incendiary discharge can occur. Incidents traceable to the presence of explosion suppressant foam began to surface in 1974 (Fig. 13) and continue to be a problem for the military services.

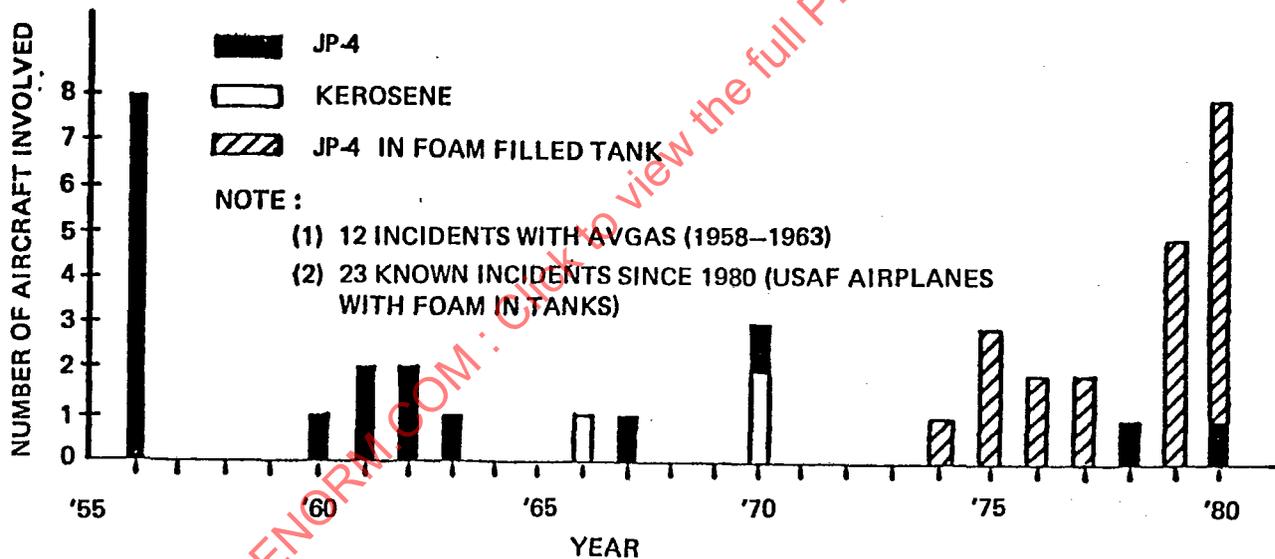


Figure 13. Aircraft Accidents Attributed to Static Electricity (Ref 1)

When incendiary events induced by discharges occur in foam protected tanks, the foam prevents explosion, and prevents large scale fire spreading; however, the charred foam must be replaced which is an expensive, time consuming task. Subtle problems with explosion suppressant foam found in the past have included the following: