

Issued 1949-05
Revised 1996-08
Reaffirmed 2012-10
Superseding AIR26

Number 70-90, 70L-90, 80-100, and 80L-100 Propeller Shaft Ends
Dual Rotation (Propeller Supplied Bearing)

RATIONALE

AIR26A has been reaffirmed to comply with the SAE five-year review policy.

1. SCOPE:

This SAE Aerospace Information Report (AIR) records the dimensions for the No. 70-90, 70L-90, 80-100, and 80L-100 dual rotation propeller shaft ends, which have been deleted from ARP375.

2. REFERENCES:

2.1 SAE Publications:

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

ARP375 Propeller Shaft Ends - Dual Rotation (Propeller Supplied Bearing)

2.2 Other Publications:

AND10152 Shaft Ends - Propeller

3. BACKGROUND:

3.1 ARP375, initially issued November 1, 1948, included dimensions and data for No. 70-90, 70L-90, 80-100, and 80L-100 dual rotation shafts. The 70-90 and 70L-90 shafts were intended for use with engines of 8,000 to 12,000 hp. However, at about this time it became apparent that the 70 and 70L shafts in these combinations were critically loaded due to gyroscopic and 1XP continuous bending moments being encountered in modern high-speed high wing-loading aircraft. Therefore, dimensions for the 80-90 shafts were developed for inclusion in the revised ARP375. Since it appeared that the 70-90, 70L-90, 80-100, and 80L-100 shafts would not be used, it was decided to delete them from ARP375 and include them in an Aerospace Information Report.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AIR26A>**

- 3.2 Although SAE Committee E-21 and P-6 had established the designations 70-90 for the shafts having a P dimension of 23.250 and 70L-90 for the shafts having a P dimension of 29.250, the Air Force and Navy in issuing AND10152, Shaft Ends - Propeller, revision 1, chose to show only the combination with the P dimension of 29.250 and to designate this as 70-90. In view of the previous correspondence, layouts, etc., which showed this combination as the 70L-90, the tables included herein do not agree with AND10152 in this regard, but retain the original designation from ARP375. The above is noted to prevent future confusion concerning these particular shaft designations.

SAENORM.COM : Click to view the full PDF of air26a

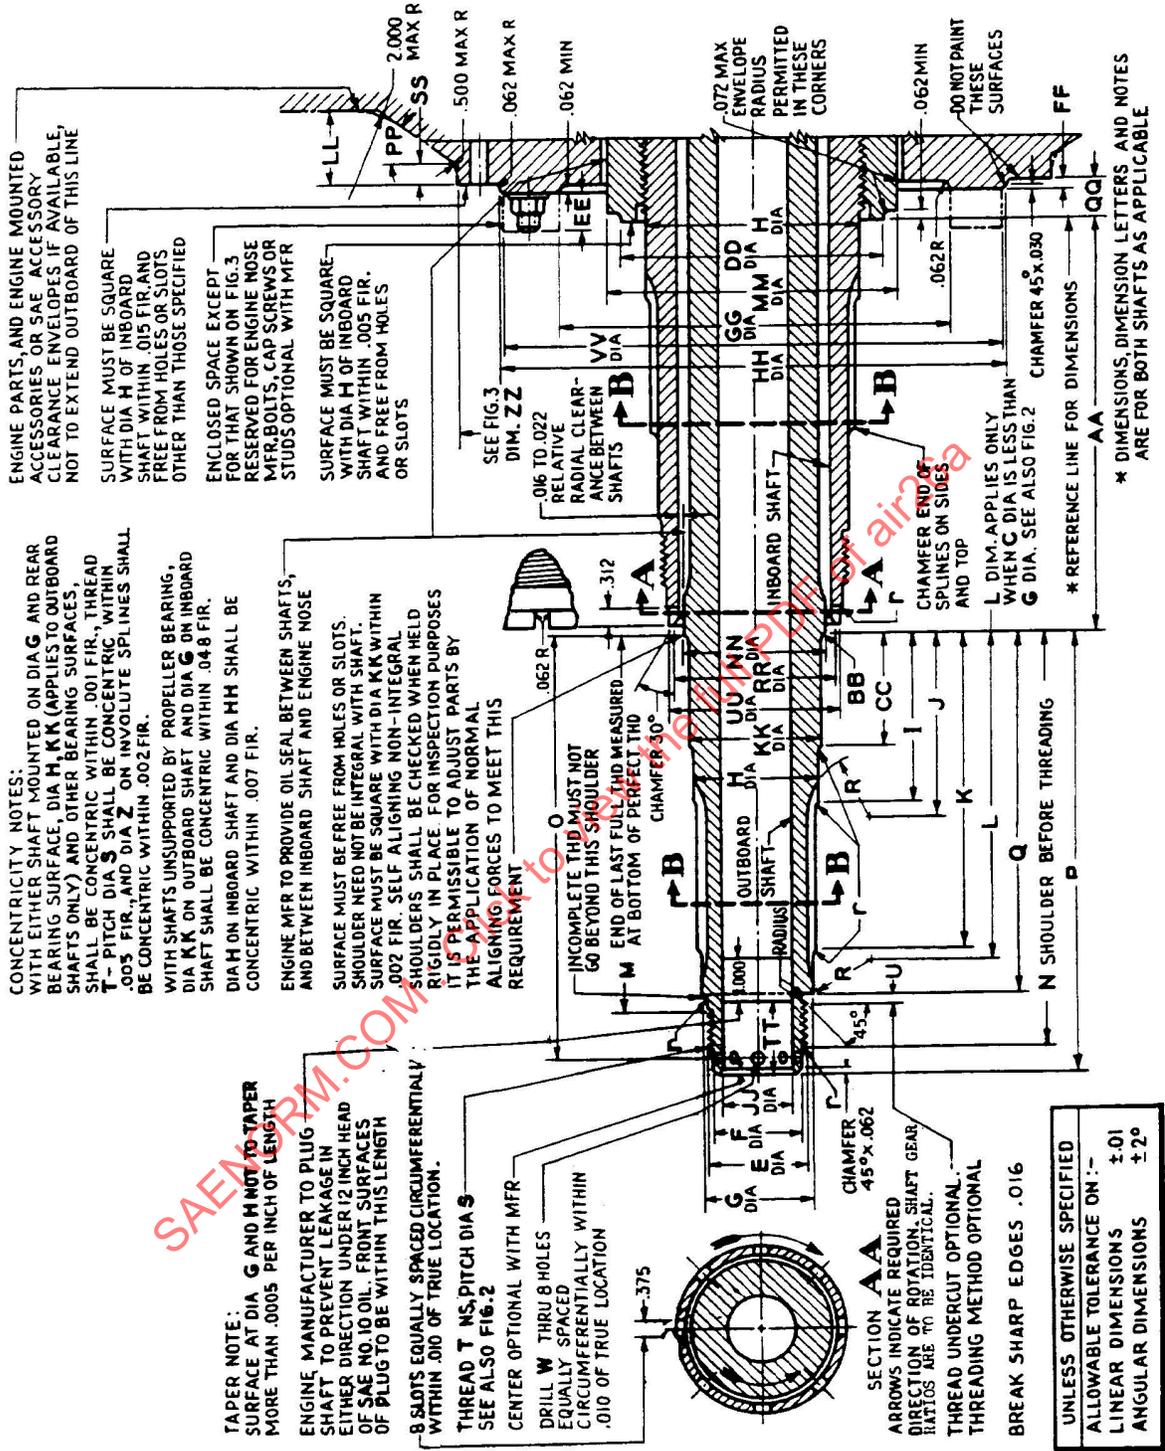


FIGURE 1

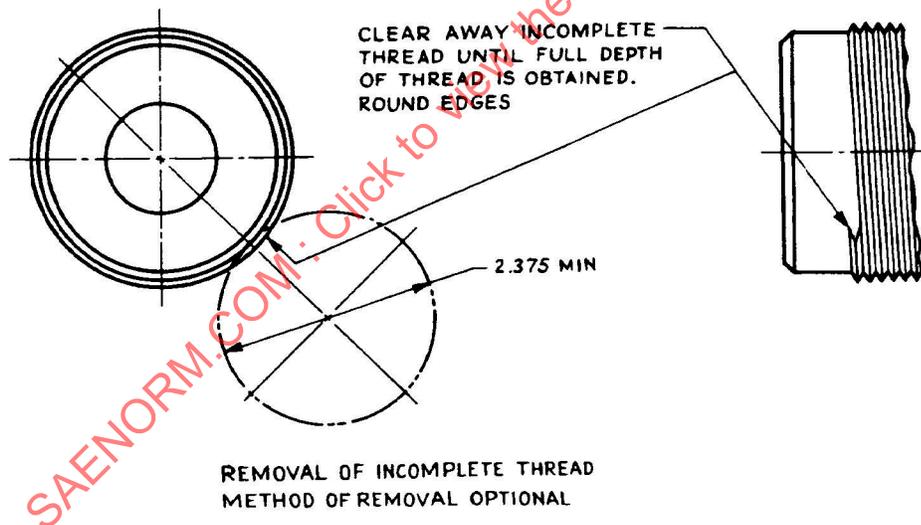
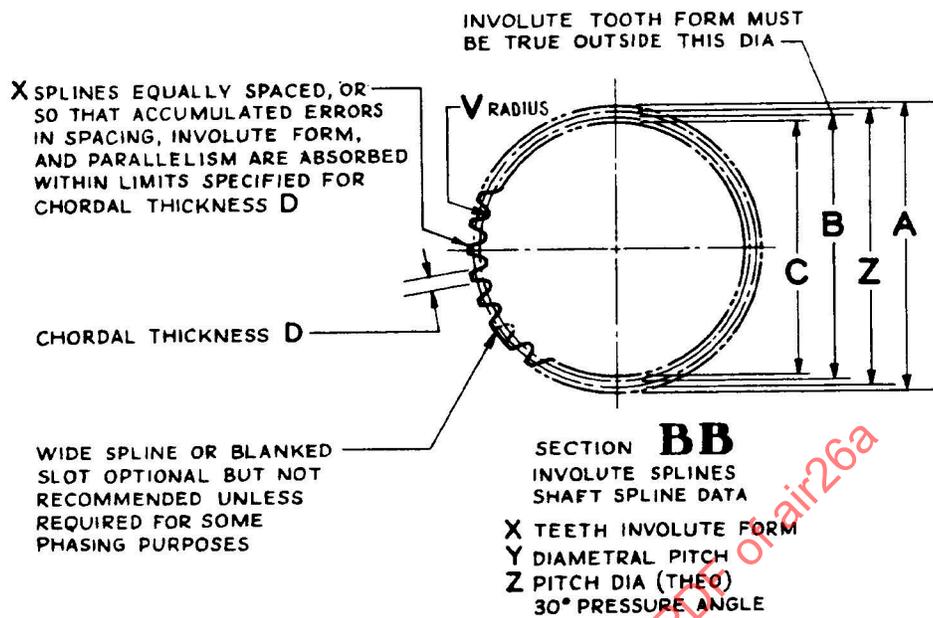


FIGURE 1 (Continued)