

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
9535

AMS-DTL-22499/1

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-DTL-22499/1B, AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-DTL-22499/1B. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of amsdtl22499/1

ISSUED 1998-09

PREPARED UNDER THE JURISDICTION OF AMS COMMITTEE "D, E, F, G, P"



AMS SPECIFICATION

SHIM STOCK, LAMINATED, ALUMINUM ALLOY

AMS-DTL-22499/1
SHEET 1 OF 3

Copyright 1998 Society of Automotive Engineers, Inc.
All rights reserved.


Printed in the U.S.A.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8510
TO PLACE A DOCUMENT ORDER: (724) 776-4970

FAX: (724) 776-0942
FAX: (724) 776-0942
SAE WEB ADDRESS: <http://www.sae.org>
Distributed under license from the IHS Archive

AMS-DTL-22499/1

THE REQUIREMENT FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-DTL-22499.

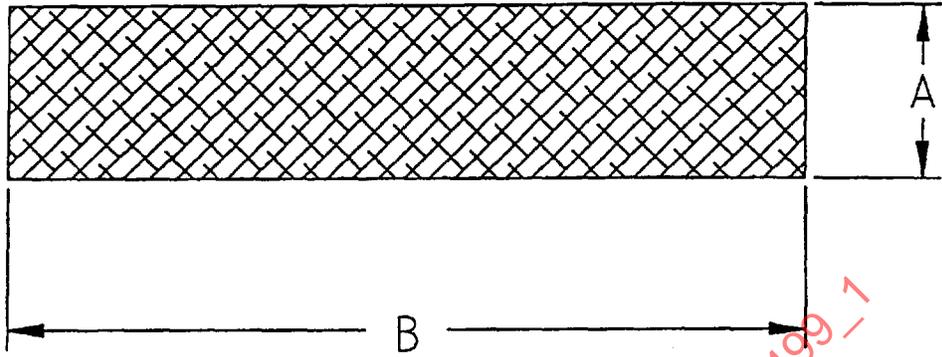

NOTE: All dimensions are in inches.

FIGURE 1 - BAR, METAL, FLAT

REQUIREMENTS

1. MATERIAL: ALUMINUM ALLOY AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. TYPES: I - ALL LAMINATIONS
II - ONE-HALF SOLID STOCK
CLASSES: 1. - .002 INCH LAMINATIONS
2. - .003 INCH LAMINATIONS
3. PART NUMBERS: THE PART NUMBER CONSISTS OF M22499/1 THE BASIC NUMBER OF THIS SPECIFICATION SHEET AND A DASH NUMBER TAKEN FROM TABLE 1.

SAENORM.COM : Click to view the full PDF of amsdtl22499_1

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AMS SPECIFICATION

SHIM STOCK, LAMINATED, ALUMINUM ALLOY

AMS-DTL-22499/1
SHEET 2 OF 3