


AS100001

Section 8.4 of the SAE Technical Board rules provides that: "All technical reports, including standards approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Technical Board, its Councils and Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents."

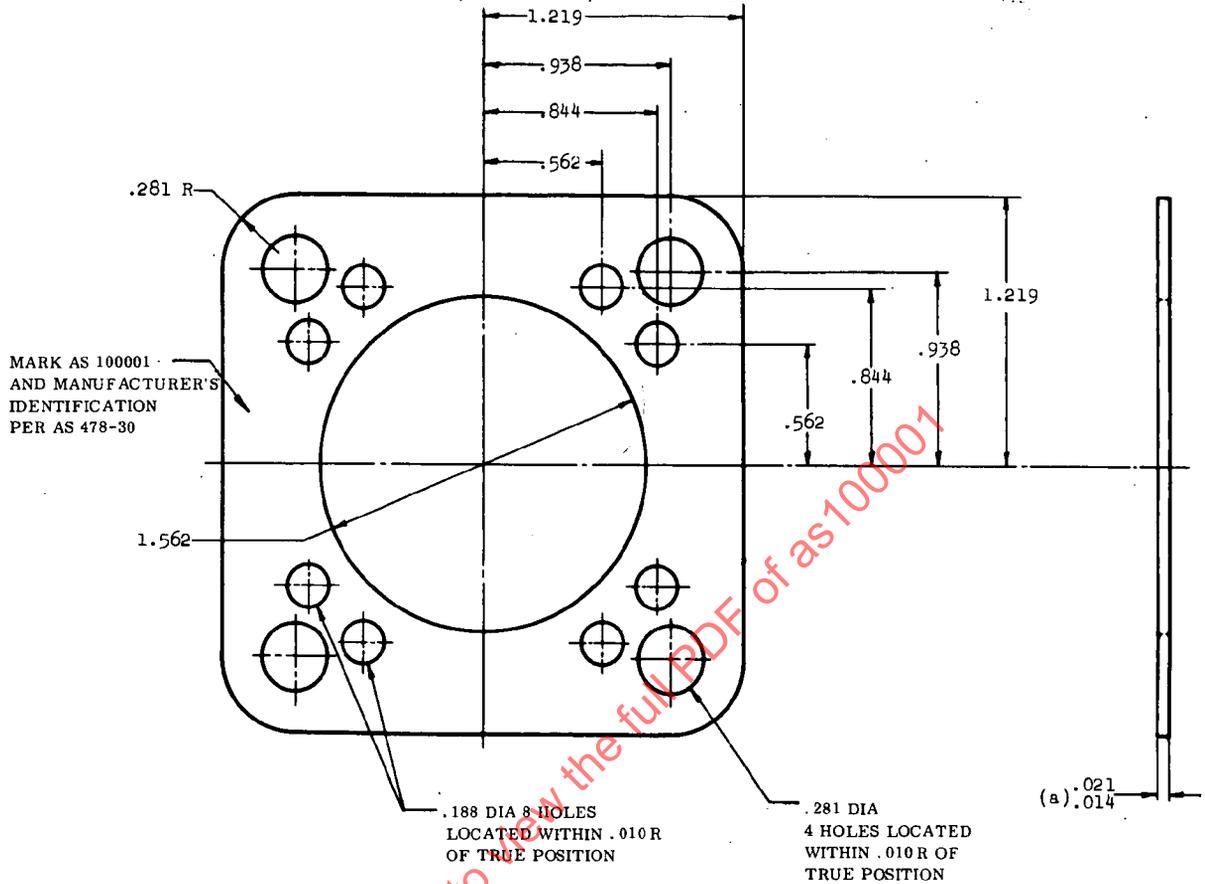

Ⓒ INACTIVE FOR NEW DESIGN AFTER 1 OCT 1967 USE MS9134.

REAFFIRMED

MAY 95

- (a) NOTE: COMPRESSIBILITY OF MATERIAL IS BASED ON .016 BASIC THICKNESS.
- MATERIAL: ASBESTOS AND SYNTHETIC RUBBER SHEET AMS 3232.
- EDGES SHALL BE CLEAN CUT.
- DIMENSIONS IN INCHES. UNLESS OTHER SPECIFIED: TOLERANCES: LINEAR DIMENSIONS $\pm .010$,
LINEAR DIMENSIONS FOR LOCATING HOLES ARE BASIC.
- TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION.

PREPARED BY COMMITTEE E 25, ENGINE & PROPELLER STANDARD UTILITY PARTS

Society of Automotive Engineers, Inc.
485 Lexington Avenue
New York City

AEROSPACE STANDARD

GASKET - TYPE X OR XV ENGINE ACCESSORY DRIVE

AS 100001


SAENORM.COM : Click to buy the full PDF of as100001

Issued 2-1-52 Revised (A) 5-2-63 (B) 2-15-64 (C) 11-15-67

AS100001

Section 8.4 of the SAE Technical Board rules provides that: "All technical reports, including standards approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report, in formulating and approving technical reports, the Technical Board, its Councils and Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against infringement of patents."

MARK AS 100001
AND MANUFACTURER'S
IDENTIFICATION
PER AS 478-30

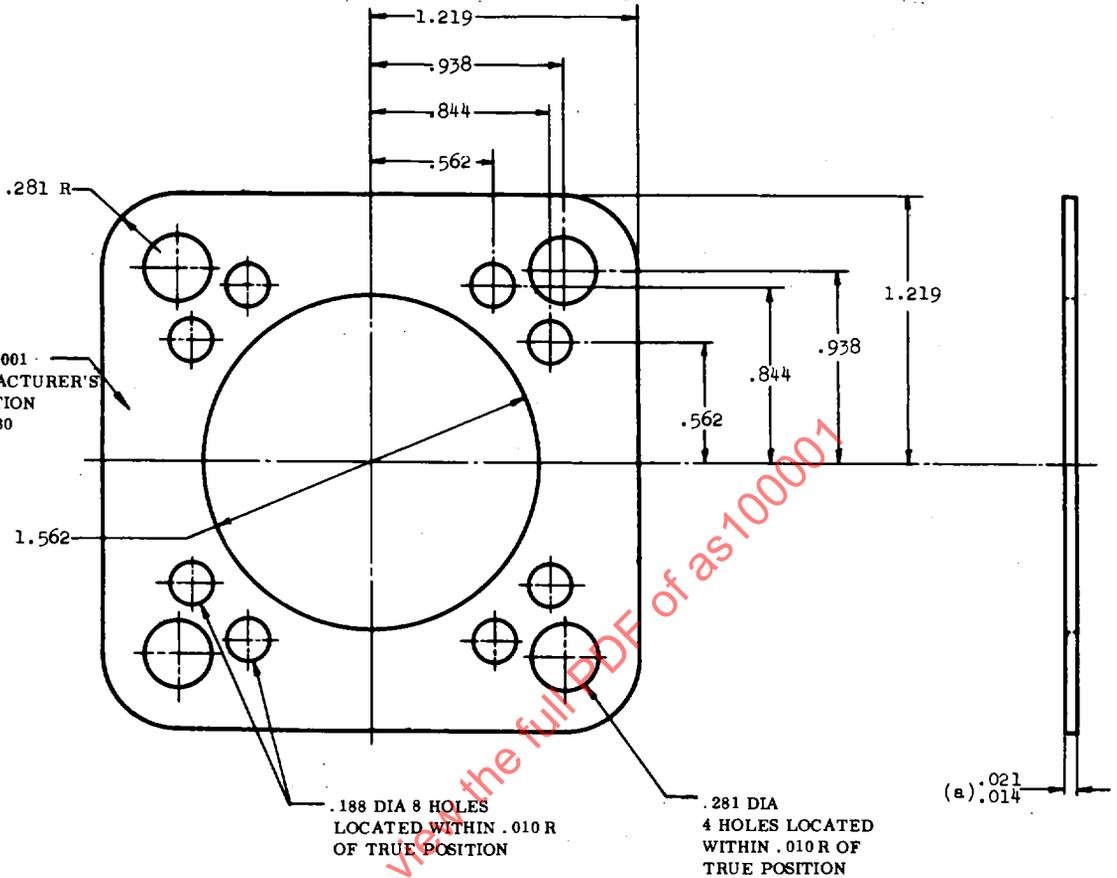

Ⓒ INACTIVE FOR NEW DESIGN AFTER 1 OCT 1967 USE MS9134.

1. (a) NOTE: COMPRESSIBILITY OF MATERIAL IS BASED ON .016 BASIC THICKNESS.
2. MATERIAL: ASBESTOS AND SYNTHETIC RUBBER SHEET AMS 3232.
3. EDGES SHALL BE CLEAN CUT.
4. DIMENSIONS IN INCHES. UNLESS OTHER SPECIFIED: TOLERANCES: LINEAR DIMENSIONS $\pm .010$.
LINEAR DIMENSIONS FOR LOCATING HOLES ARE BASIC.
5. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION.

PREPARED BY COMMITTEE E 25, ENGINE & PROPELLER STANDARD UTILITY PARTS

Society of Automotive Engineers, Inc.
485 Lexington Avenue
New York City

AEROSPACE STANDARD

GASKET - TYPE X OR XV ENGINE ACCESSORY DRIVE

AS 100001

Copyright 1967 by Society of Automotive Engineers, Inc.

REAFFIRMED

Printed in U.S.A.

12/91, 5/95

Issued 2-1-52 Revised (A) 5--63 (B) 2-15-64 (C) 11-15-67