

REV.
K

AS1002™

FEDERAL SUPPLY CLASS
4730

RATIONALE

DRAWING NOTE #11 INCORRECTLY REFERENCED AS1376 TABLE 2. ALSO, QPL NOTE /4/ HAS BEEN CHANGED, PER THE NEWLY ADOPTED VERBIAGE AGREED TO DURING OUR SEPTEMBER G3 CONFERENCE.

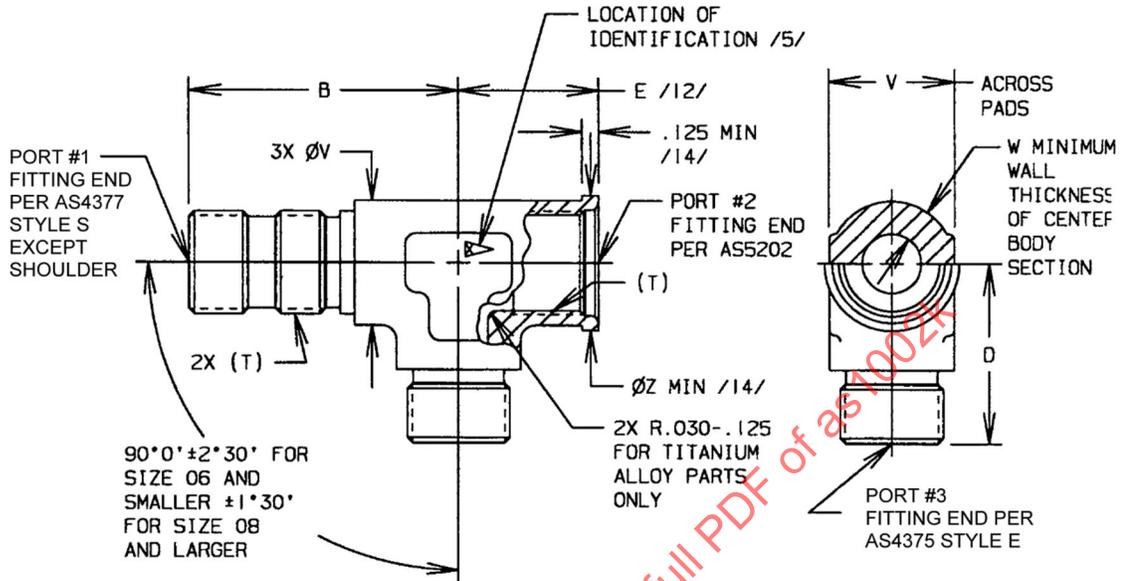


FIGURE 1 - FITTING, TEE, BULKHEAD END FOR OPTIONAL USE IN PORT INSTALLATION, PORT #2 SHOWN AS NON-REDUCER


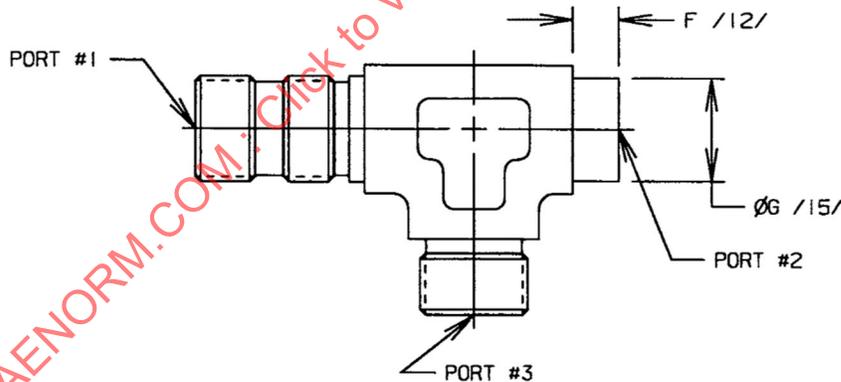


FIGURE 2 - FITTING, TEE, BULKHEAD END FOR OPTIONAL USE IN PORT INSTALLATION, PORT #2 SHOWN AS REDUCER, SAME AS FIGURE 1 EXCEPT AS SHOWN

For more information on this standard, visit <https://www.sae.org/standards/content/AS1002K/>



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: AS18280 /4/



AEROSPACE STANDARD

FITTING, TEE, STANDARD AND REDUCER, BULKHEAD AND INTERNAL PORT ON RUN, FLARELESS

AS1002™
SHEET 1 OF 6

REV.
K

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1966-03 REAFFIRMED 2005-06 REVISED 2022-05

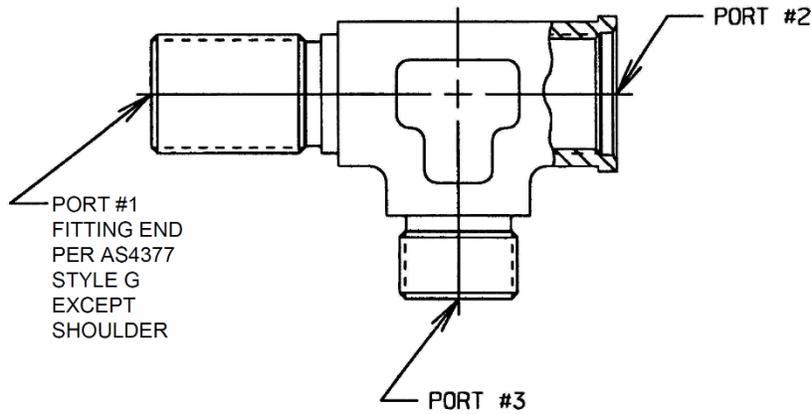


FIGURE 3 - FITTING, TEE, BULKHEAD END NOT FOR USE IN PORT INSTALLATION, PORT #2 SHOWN AS NON-REDUCER, SAME AS FIGURE 1 EXCEPT AS SHOWN

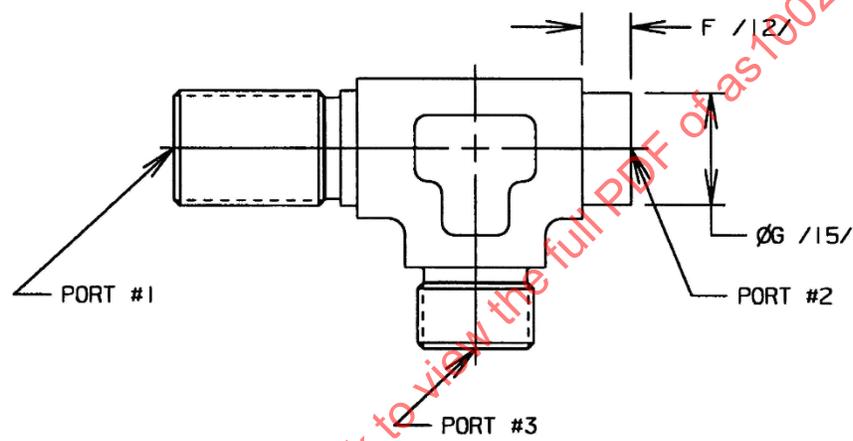


FIGURE 4 - FITTING, TEE, BULKHEAD END NOT FOR USE IN PORT INSTALLATION, PORT #2 SHOWN AS REDUCER, SAME AS FIGURE 1 EXCEPT AS SHOWN

TABLE 1 - DIMENSIONS AND WEIGHTS /16/

BASIC NO. AS1002 /13/ /25/ SIZE CODE	E /12/	F / 12/	V	W	Z /14/	LB/EA APPROX REF ALUM	LB/EA APPROX REF STEEL	LB/EA APPROX REF TI
02	.648	-	.485- .502	.090	.562	.018	.051	.029
03	.711	-	.547- .565	.100	.625	.039	.104	.060
04	.773	.375	.735- .753	.110	-	.083	.233	.134
05	.773	.375	.735- .753	.120	.750	.099	.278	.160
06	.836	.375	.860- .878	.120	-	.116	.326	.188
08	1.023	.469	1.047-1.065	.150	-	.197	.554	.319
10	1.180	.625	1.047-1.065	.170	1.125	.206	.579	.334
12	1.367	.688	1.297-1.317	.185	1.375	.360	1.012	.583
14	1.507	.706	1.547-1.567	.200	-	-	-	-
16	1.555	.719	1.605-1.630	.205	1.625	.455	1.340	.773
20	1.742	.781	1.855-1.880	.240	1.938	.672	1.950	1.125

TABLE 2 - LEG LENGTH B /17/

FORGING SIZE /13/	TUBE SIZE OF PORT #1										
	02	03	04	05	06	08	10	12	14	16	20
02	1.398	-	-	-	-	-	-	-	-	-	-
03	1.430	1.477	-	-	-	-	-	-	-	-	-
04	1.585	1.632	1.695	-	-	-	-	-	-	-	-
05	1.585	1.632	1.695	1.695	-	-	-	-	-	-	-
06	1.758	1.805	1.868	1.868	1.914	-	-	-	-	-	-
08	1.727	1.774	1.837	1.837	1.883	2.055	-	-	-	-	-
10	1.804	1.851	1.914	1.914	1.960	2.132	2.273	-	-	-	-
12	1.883	1.930	1.993	1.993	2.039	2.211	2.352	2.461	-	-	-
14	2.040	2.087	2.150	2.150	2.196	2.368	2.509	2.618	2.618	-	-
16	2.102	2.149	2.212	2.212	2.258	2.430	2.571	2.680	2.680	2.680	-
20	2.242	2.289	2.352	2.352	2.398	2.570	2.711	2.820	2.820	2.820	2.820

TABLE 3 - LEG LENGTH D /17/

FORGING SIZE /13/	TUBE SIZE OF PORT #3										
	02	03	04	05	06	08	10	12	14	16	20
02	.867	-	-	-	-	-	-	-	-	-	-
03	.883	.930	-	-	-	-	-	-	-	-	-
04	1.039	1.086	1.117	-	-	-	-	-	-	-	-
05	1.039	1.086	1.117	1.117	-	-	-	-	-	-	-
06	1.086	1.133	1.164	1.164	1.180	-	-	-	-	-	-
08	1.180	1.227	1.258	1.258	1.274	1.367	-	-	-	-	-
10	1.273	1.320	1.351	1.351	1.367	1.460	1.523	-	-	-	-
12	1.351	1.398	1.429	1.429	1.445	1.538	1.601	1.644	-	-	-
14	1.492	1.593	1.870	1.570	1.586	1.679	1.724	1.867	1.867	-	-
16	1.554	1.601	1.632	1.632	1.648	1.741	1.804	1.867	1.867	1.867	-
20	1.695	1.742	1.773	1.773	1.789	1.882	1.945	2.008	2.008	2.008	2.008

TABLE 4 - MACHINED ØG /15/ /17/

FORGING SIZE /13/	TUBE SIZE OF PORT #2										
	02	03	04	05	06	08	10	12	14	16	20
02	-	-	-	-	-	-	-	-	-	-	-
03	-	-	-	-	-	-	-	-	-	-	-
04	.594	.656	-	-	-	-	-	-	-	-	-
05	.594	.656	-	-	-	-	-	-	-	-	-
06	.594	.656	.719	.781	-	-	-	-	-	-	-
08	.594	.656	.719	.781	.844	-	-	-	-	-	-
10	.594	.656	.719	.781	.844	-	-	-	-	-	-
12	.594	.656	.719	.781	.844	1.062	-	-	-	-	-
14	.594	.656	.719	.781	.844	1.062	1.188	1.438	-	-	-
16	.594	.656	.719	.781	.844	1.062	1.188	1.438	1.562	-	-
20	.594	.656	.719	.781	.844	1.062	1.188	1.438	1.562	1.688	-



AEROSPACE STANDARD
 FITTING, TEE, STANDARD AND REDUCER,
 BULKHEAD AND INTERNAL PORT ON RUN,
 FLARELESS

AS1002™
 SHEET 3 OF 6

**REV.
 K**

TABLE 5 - TUBE SIZE AND CORRESPONDING THREAD

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3A AND CLASS 3B
02	.125	.3125-24 UNJF
03	.188	.3750-24 UNJF
04	.250	.4375-20 UNJF
05	.312	.5000-20 UNJF
06	.375	.5625-18 UNJF
08	.500	.7500-16 UNJF
10	.625	.8750-14 UNJF
12	.750	1.0625-12 UNJ
14	.875	1.1875-12 UNJ
16	1.000	1.3125-12 UNJ
20	1.250	1.6250-12 UNJ

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

- a. CODE LETTER DASH (-) - TYPE 4130 LOW ALLOY STEEL FORGING OR BAR PER AMS6370 OR AMS-S-6758 EXCEPT HEAT TREATMENT PER PROCUREMENT SPECIFICATION. /2/
- b. CODE LETTER D - TYPE 2024-T6 OR -T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS4133. /2/
- c. CODE LETTER F - TYPE 4130 LOW ALLOY STEEL FORGING OR BAR PER AMS6370 OR AMS-S-6758 EXCEPT HEAT TREATMENT PER PROCUREMENT SPECIFICATION. /2/
- d. CODE LETTER J - TYPE 304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5639 OR AMS-QQ-S-763 EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/
- e. CODE LETTER K - TYPE 316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5648 OR AMS-QQ-S-763 EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/
- f. CODE LETTER R - TYPE 321 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5645 OR AMS-QQ-S-763 EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/
- g. CODE LETTER S - TYPE 347 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5646 OR AMS-QQ-S-763 EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/
- h. CODE LETTER T - TYPE 6AL-4V TITANIUM ALLOY FORGING OR BAR PER AMS4928.
- i. CODE LETTER W - TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS4141 OR AMS-QQ-A-367; OR 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124; OR 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9. /2/

/2/ HEAT TREATMENT:

- a. MATERIAL CODE LETTER (-) AND F - HARDNESS SHALL BE 92 HRB TO 40 HRC PER PROCUREMENT SPECIFICATION.
- b. MATERIAL CODE LETTERS D AND W - ELECTRICAL CONDUCTIVITY AND HARDNESS PER PROCUREMENT SPECIFICATION.
- c. MATERIAL CODE LETTERS J, K, R, AND S - HARDNESS SHALL BE 80 HRB MINIMUM PER PROCUREMENT SPECIFICATION.
- d. OTHER MATERIAL CODES - NONE.

	AEROSPACE STANDARD	AS1002™ SHEET 4 OF 6	REV. K
	FITTING, TEE, STANDARD AND REDUCER, BULKHEAD AND INTERNAL PORT ON RUN, FLARELESS		