

REV. E

AS1032

FEDERAL SUPPLY CLASS
4730

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

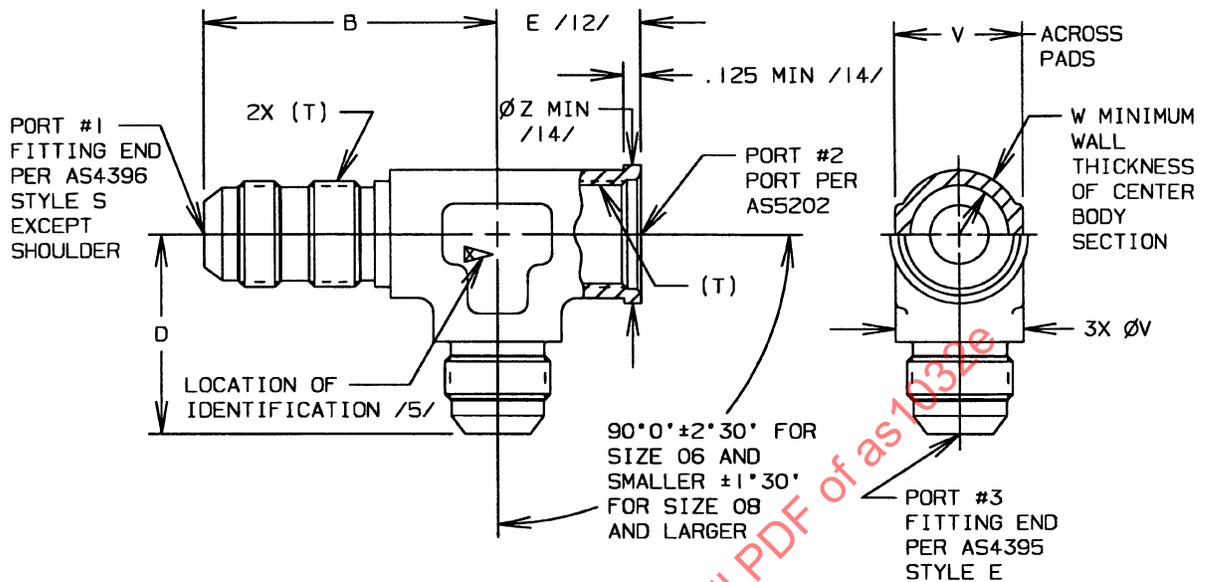


FIGURE 1 - FITTING, TEE, BULKHEAD END FOR OPTIONAL USE IN PORT PORT #2 SHOWN AS NON-REDUCER


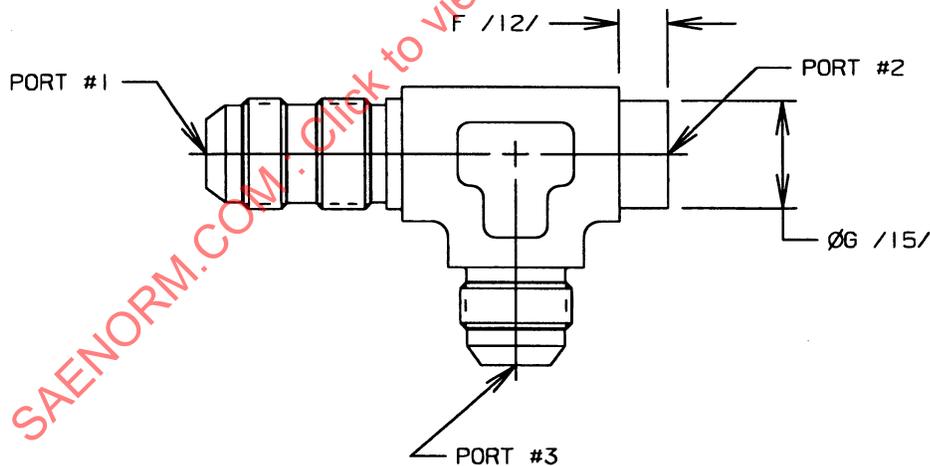


FIGURE 2 - FITTING, TEE, BULKHEAD END FOR OPTIONAL USE IN PORT PORT #2 SHOWN AS REDUCER SAME AS FIGURE 1 EXCEPT AS SHOWN

INACTIVE IN PART - SEE NOTE /24/

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS4875/1

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING, TEE, STANDARD AND REDUCER,
BULKHEAD ON RUN, INTERNAL PORT ON
RUN, FLARED

AS1032
SHEET 1 OF 7

REV. E

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1962-08 REVISED 2003-08 REAFFIRMED 2007-07

REV.
E

AS1032

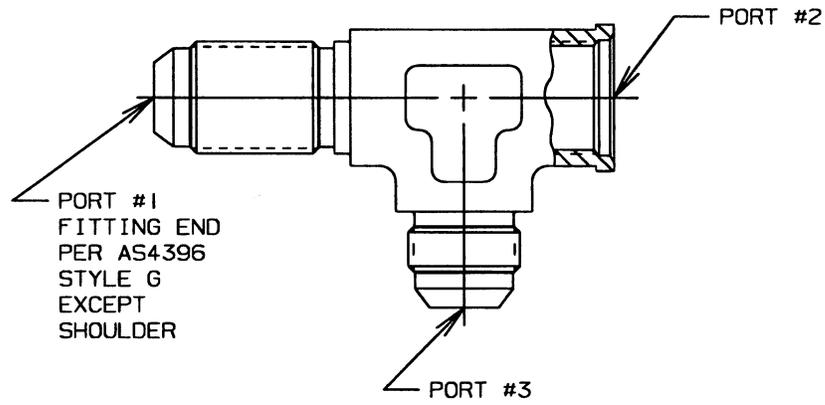


FIGURE 3 - FITTING, TEE, BULKHEAD END NOT FOR USE IN PORT
PORT #2 SHOWN AS NON-REDUCER
SAME AS FIGURE 1 EXCEPT AS SHOWN /23/

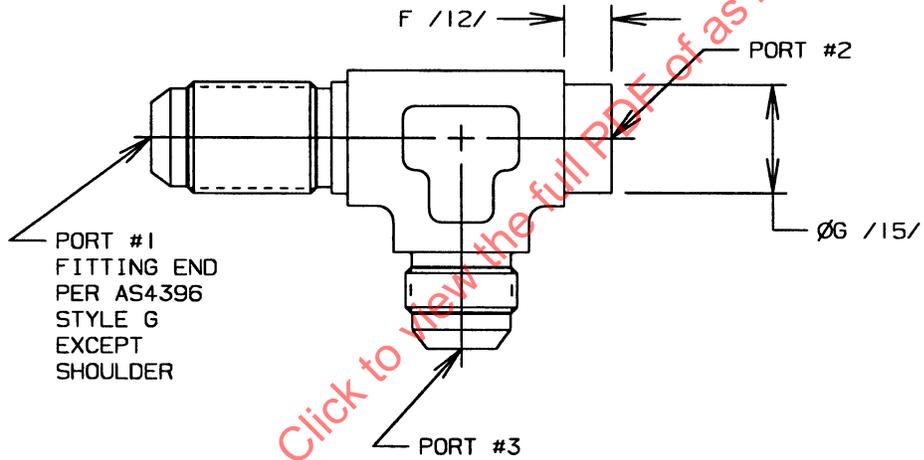


FIGURE 4 - FITTING, TEE, BULKHEAD END NOT FOR USE IN PORT
PORT #2 SHOWN AS REDUCER
SAME AS FIGURE 1 EXCEPT AS SHOWN /23/

REV.
E

AS1032

TABLE 1 - DIMENSIONS AND WEIGHTS /16/

BASIC NO. AS1032 /13/ /23/ SIZE CODE	E /12/	F /12/	V	W	Z /14/	LB/EA APPROX REF ALUM	LB/EA APPROX REF CRES	LB/EA APPROX REF TI
02	.648	-	.485-.502	.090	.562	.0348	.0998	.0551
03	.711	-	.547-.565	.100	.625	.0456	.131	.0722
04	.773	.375	.735-.753	.110	-	.0930	.267	.147
05	.773	.375	.735-.753	.120	-	.0895	.257	.142
06	.836	.375	.860-.878	.120	-	.134	.386	.213
08	1.023	.469	1.047-1.065	.150	-	.214	.617	.340
10	1.180	.625	1.047-1.065	.170	1.125	.221	.636	.351
12	1.367	.688	1.292-1.317	.185	1.375	.365	1.05	.579
16	1.555	.719	1.605-1.630	.205	1.625	.527	1.51	.835
20	1.742	.781	1.855-1.880	.240	1.938	.759	2.18	1.20

TABLE 2 - LEG LENGTH B

FORGING SIZE /13/	TUBE SIZE OF PORT #1 02	TUBE SIZE OF PORT #1 03	TUBE SIZE OF PORT #1 04	TUBE SIZE OF PORT #1 05	TUBE SIZE OF PORT #1 06	TUBE SIZE OF PORT #1 08	TUBE SIZE OF PORT #1 10	TUBE SIZE OF PORT #1 12	TUBE SIZE OF PORT #1 16	TUBE SIZE OF PORT #1 20
02	1.491	-	-	-	-	-	-	-	-	-
03	1.523	1.523	-	-	-	-	-	-	-	-
04	1.679	1.679	1.773	-	-	-	-	-	-	-
05	1.679	1.679	1.773	1.773	-	-	-	-	-	-
06	1.851	1.851	1.945	1.945	2.023	-	-	-	-	-
08	1.851	1.851	1.945	1.945	2.023	2.179	-	-	-	-
10	1.929	1.929	2.023	2.023	2.101	2.257	2.398	-	-	-
12	2.008	2.008	2.102	2.102	2.180	2.336	2.477	2.648	-	-
16	2.227	2.227	2.321	2.321	2.399	2.555	2.696	2.867	2.867	-
20	2.367	2.367	2.461	2.461	2.539	2.695	2.836	3.007	3.007	3.054

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING, TEE, STANDARD AND REDUCER,
BULKHEAD ON RUN, INTERNAL PORT ON
RUN, FLARED

AS1032
SHEET 3 OF 7

REV.
E

REV.
E

AS1032

TABLE 3 - LEG LENGTH D

FORGING SIZE /13/	TUBE SIZE OF PORT #3 02	TUBE SIZE OF PORT #3 03	TUBE SIZE OF PORT #3 04	TUBE SIZE OF PORT #3 05	TUBE SIZE OF PORT #3 06	TUBE SIZE OF PORT #3 08	TUBE SIZE OF PORT #3 10	TUBE SIZE OF PORT #3 12	TUBE SIZE OF PORT #3 16	TUBE SIZE OF PORT #3 20
02	.929	-	-	-	-	-	-	-	-	-
03	.961	.992	-	-	-	-	-	-	-	-
04	1.109	1.140	1.211	-	-	-	-	-	-	-
05	1.109	1.140	1.211	1.211	-	-	-	-	-	-
06	1.165	1.196	1.267	1.267	1.273	-	-	-	-	-
08	1.232	1.283	1.354	1.354	1.360	1.461	-	-	-	-
10	1.338	1.369	1.440	1.440	1.446	1.547	1.648	-	-	-
12	1.420	1.451	1.522	1.522	1.528	1.629	1.730	1.836	-	-
16	1.623	1.654	1.725	1.725	1.731	1.832	1.933	2.039	2.086	-
20	1.763	1.794	1.865	1.865	1.871	1.972	2.073	2.179	2.226	2.273

TABLE 4 - ØG /15/

FORGING SIZE /13/	TUBE SIZE OF PORT #2 02	TUBE SIZE OF PORT #2 03	TUBE SIZE OF PORT #2 04	TUBE SIZE OF PORT #2 05	TUBE SIZE OF PORT #2 06	TUBE SIZE OF PORT #2 08	TUBE SIZE OF PORT #2 10	TUBE SIZE OF PORT #2 12	TUBE SIZE OF PORT #2 16
03	-	-	-	-	-	-	-	-	-
04	.594	.656	-	-	-	-	-	-	-
05	.594	.656	-	-	-	-	-	-	-
06	.594	.656	.719	.781	-	-	-	-	-
08	.594	.656	.719	.781	.844	-	-	-	-
10	.594	.656	.719	.781	.844	-	-	-	-
12	.594	.656	.719	.781	.844	1.062	-	-	-
16	.594	.656	.719	.781	.844	1.062	1.188	1.438	-
20	.594	.656	.719	.781	.844	1.062	1.188	1.438	1.688

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING, TEE, STANDARD AND REDUCER,
BULKHEAD ON RUN, INTERNAL PORT ON
RUN, FLARED

AS1032
SHEET 4 OF 7

REV.
E

TABLE 5 - TUBE SIZE AND CORRESPONDING THREAD

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3A
02	.125	.3125-24 UNJF
03	.188	.3750-24 UNJF
04	.250	.4375-20 UNJF
05	.312	.5000-20 UNJF
06	.375	.5625-18 UNJF
08	.500	.7500-16 UNJF
10	.625	.8750-14 UNJF
12	.750	1.0625-12 UNJ
16	1.000	1.3125-12 UNJ
20	1.250	1.6250-12 UNJ

NOTES:

/1/ MATERIAL:

- a. DASH AS CODE LETTER - TYPE 4140 STEEL BAR PER AMS 6349 OR AMS 6382 OR TYPE 4130 STEEL FORGING OR BAR PER AMS 6370 OR AMS-S-6758 EXCEPT HEAT TREATMENT PER PROCUREMENT SPECIFICATION.
- b. CODE LETTER D - TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS 4133 OR AMS-QQ-A-367; OR 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6, OR 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6. /24/
- c. CODE LETTER J - TYPE 304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5639 OR AMS-QQ-S-763 EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION.
- d. CODE LETTER K - TYPE 316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5648 OR AMS-QQ-S-763 EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION.
- e. CODE LETTER R - TYPE 321 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS 5645 OR AMS-QQ-S-763 EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION.
- f. CODE LETTER T - 6AL-4V TITANIUM ALLOY FORGING OR BAR PER AMS 4928.
- g. CODE LETTER W - 7075-T73 ALUMINUM ALLOY FORGING PER AMS 4141 OR AMS-QQ-A-367; OR 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124; OR 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9.

2. HEAT TREATMENT:

- a. DASH AS CODE LETTER - HARDNESS SHALL BE 92 HRB TO 40 HRC PER PROCUREMENT SPECIFICATION.
- b. OTHER MATERIAL CODES - NONE.

3. FINISH:

- a. DASH AS CODE LETTER - CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2, DYE BLACK.
- b. MATERIAL CODE LETTER J - PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- c. MATERIAL CODE LETTER K - PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- d. MATERIAL CODE LETTER R - PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- e. MATERIAL CODE LETTER T - FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486 OR ANODIZE PER AMS 2488, TYPE 2.