

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION AN115851 THRU AN115900 REV. 3 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE AN115851 THRU AN115900 REV. 3. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.


THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as115851

**AS115851 THRU
AS115900**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.



PREPARED BY COMMITTEE E-25




AEROSPACE STANDARD

SCREW - FLAT FILLISTER,
DRILLED HEAD, .250-20

**AS115851 THRU
AS115900
SHEET 1 OF 3**

ISSUED 1999-08 REAFFIRMED 2005-05

**AS115851 THRU
AS115900**

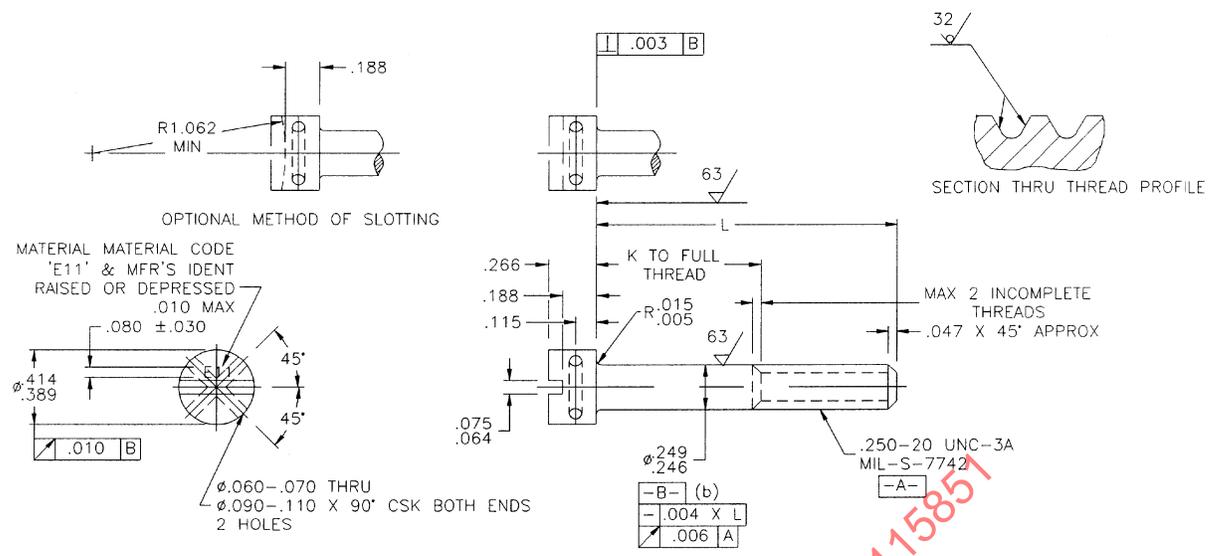

PART NO.	L	K	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060
AN115855	.375	(a)	AN115867	1.125	.375	AN115879	2.000	1.250
AN115856	.438	(a)	AN115868	1.188	.438	AN115880	2.125	1.375
AN115857	.500	(a)	AN115869	1.250	.500	AN115881	2.250	1.500
AN115858	.562	(a)	AN115870	1.312	.562	AN115882	2.375	1.625
AN115859	.625	(a)	AN115871	1.375	.625	AN115883	2.500	1.750
AN115860	.688	(a)	AN115872	1.438	.688	AN115884	2.625	1.875
AN115861	.750	(a)	AN115873	1.500	.750	AN115885	2.750	2.000
AN115862	.812	(a)	AN115874	1.562	.812	AN115886	2.875	2.125
AN115863	.875	.125	AN115875	1.625	.875	AN115887	3.000	2.250
AN115864	.938	.188	AN115876	1.688	.938			
AN115865	1.000	.250	AN115877	1.750	1.000			
AN115866	1.062	.312	AN115878	1.875	1.125			

(a) THREAD TO HEAD IN ACCORDANCE WITH AS3062
(b) FOR AN115855 THRU AN115865, DATUM A SHALL REPLACE DATUM B.