

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION AN115901 THRU AN115950 REV. 3 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE AN115901 THRU AN115950 REV. 3. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as115901

THIRD ANGLE PROJECTION



ISSUED 1998-10 REAFFIRMED 2003-10

AS115901 THRU
AS115950

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

PREPARED BY COMMITTEE E-25




AEROSPACE STANDARD

SCREW - FLAT FILLISTER, DRILLED HEAD, .250-28

AS115901 THRU
AS115950
SHEET 1 OF 3

**AS115901 THRU
AS115950**

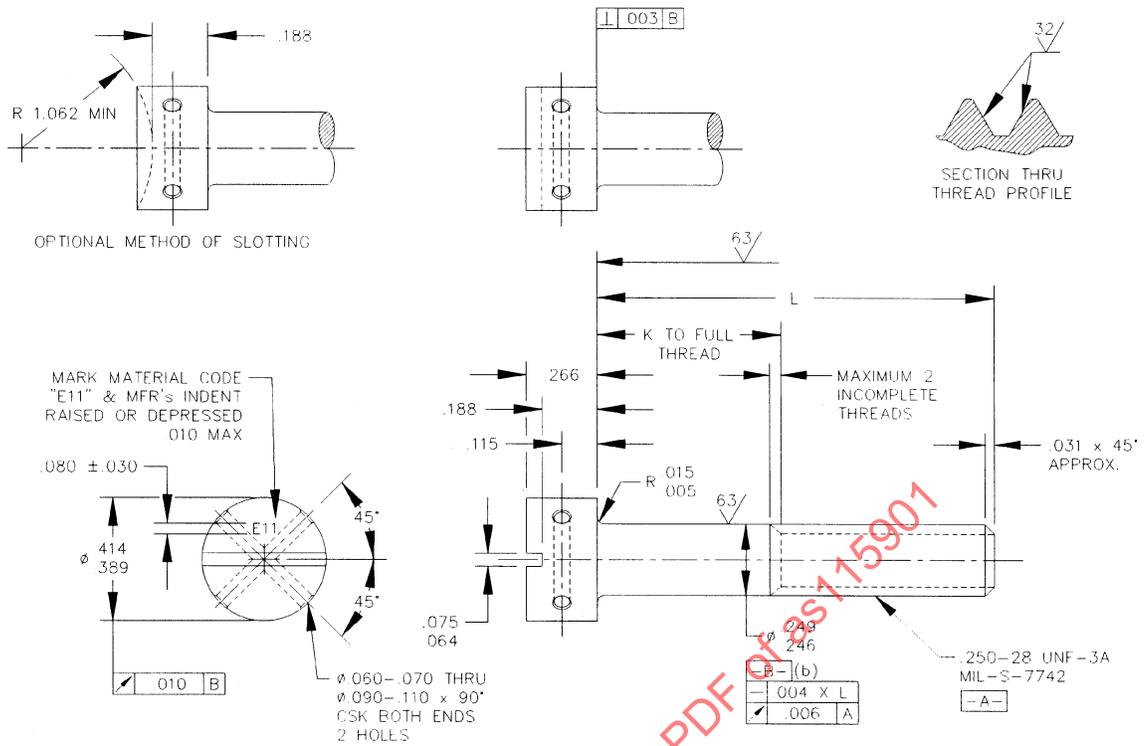

PART NO.	L	K	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060
AN115905	.375	(a)	AN115917	1.125	.375	AN115929	2.000	1.250
AN115906	.438	(a)	AN115918	1.188	.438	AN115930	2.125	1.375
AN115907	.500	(a)	AN115919	1.250	.500	AN115931	2.250	1.500
AN115908	.562	(a)	AN115920	1.312	.562	AN115932	2.375	1.625
AN115909	.625	(a)	AN115921	1.375	.625	AN115933	2.500	1.750
AN115910	.688	(a)	AN115922	1.438	.688	AN115934	2.625	1.875
AN115911	.750	(a)	AN115923	1.500	.750	AN115935	2.750	2.000
AN115912	.812	(a)	AN115924	1.562	.812	AN115936	2.875	2.125
AN115913	.875	.125	AN115925	1.625	.875	AN115937	3.000	2.250
AN115914	.938	.188	AN115926	1.688	.938			
AN115915	1.000	.250	AN115927	1.750	1.000			
AN115916	1.062	.312	AN115928	1.875	1.125			

- (a) THREAD TO HEAD IN ACCORDANCE WITH AS3062
 (b) FOR AN115905 THRU AN115915, DATUM A SHALL REPLACE DATUM B