

REV.  
K

AS120™

FEDERAL SUPPLY CLASS  
4720

RATIONALE

ADD CONFIGURATION FOR A NEW "N" CODE THIN WALL INTEGRAL FIRESLEEVE (15 MINUTE); ADD DRY FILM LUBE CONFIGURATION.

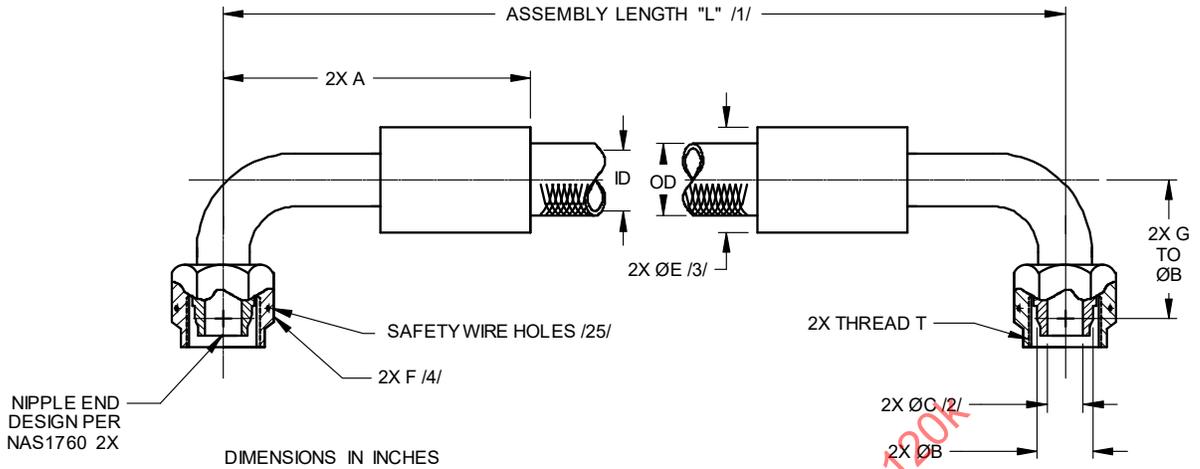


FIGURE 1 - HOSE AND FITTING DIMENSIONS

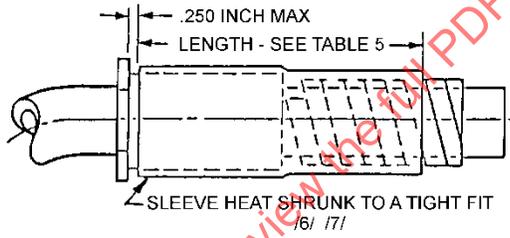


FIGURE 2 - TUBULAR/COIL ABRASION END


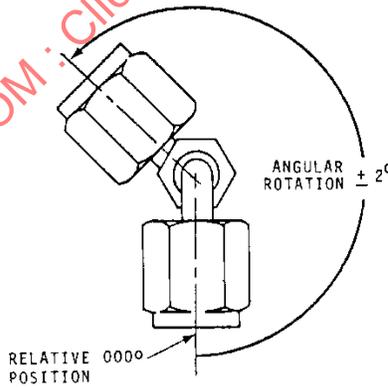


FIGURE 3 - FITTING ANGULAR ORIENTATION

For more information on this standard, visit  
<https://www.sae.org/standards/content/AS120K/>

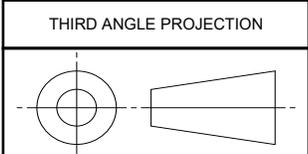

CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS1339 /20/



AEROSPACE STANDARD

HOSE ASSEMBLY, PTFE, CRES REINFORCED,  
3000 PSI, 400 °F, 90° TO 90°,  
FLARELESS, LIGHTWEIGHT

AS120™  
SHEET 1 OF 8

REV.  
K

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1976-08 REAFFIRMED 2007-07 REVISED 2021-05

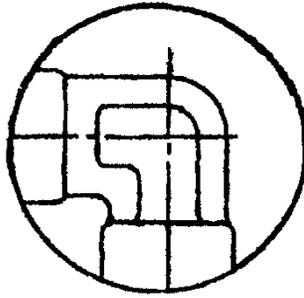


FIGURE 4 - ALTERNATE ELBOW CONFIGURATION /21/

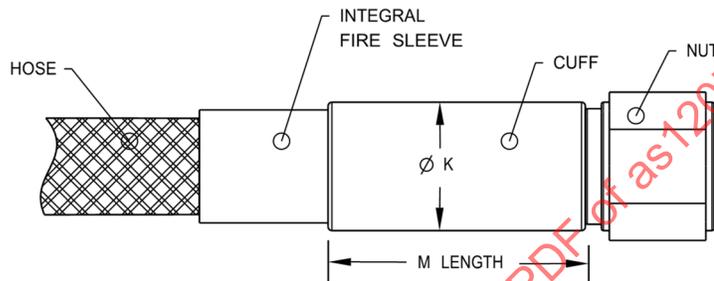


FIGURE 5 - INTEGRAL FIRESLEEVE CUFF DIMENSIONS - SEE TABLE 6 /30/

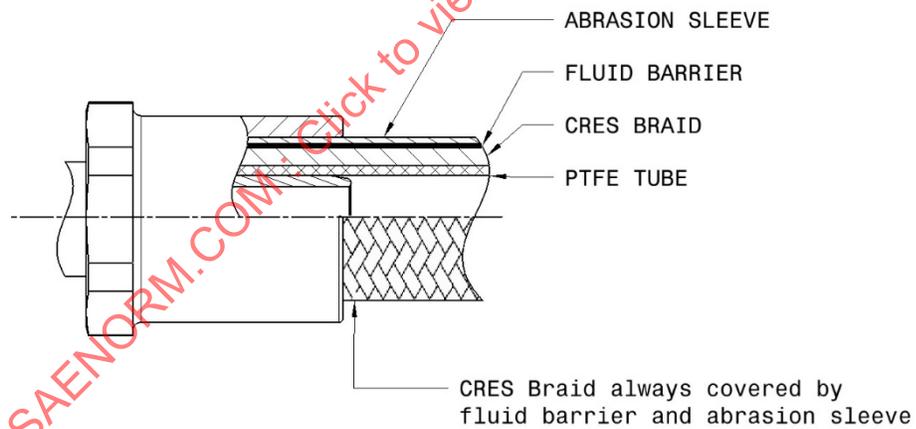


FIGURE 6 - FITTING CAPTURED INTEGRAL ABRASION SLEEVE WITH FLUID BARRIER /31/

|   |  |                               |                         |
|---|--|-------------------------------|-------------------------|
|  | <b>AEROSPACE STANDARD</b>  | <b>AS120™</b><br>SHEET 2 OF 8 | <b>REV.</b><br><b>K</b> |
|   | HOSE ASSEMBLY, PTFE, CRES REINFORCED,<br>3000 PSI, 400 °F, 90° TO 90°,<br>FLARELESS, LIGHTWEIGHT |                               |                         |

**TABLE 1 - DIMENSIONS (ALL JUMP SIZES ARE NEW)**

| HOSE ASSEMBLY NO. & SIZE /27/ | HOSE SIZE (REF) | FITTING TYPE (REF) /28/ | FITTING MATL | THREAD T PER AS8879 (REF) | HOSE ID MIN (REF) | A MAX | B GAGE DIA BASIC | C BALL DIA /2/ | E MAX WITHOUT SLEEVIN G /3/ | F HEX (REF) | G MIN | G MAX |
|-------------------------------|-----------------|-------------------------|--------------|---------------------------|-------------------|-------|------------------|----------------|-----------------------------|-------------|-------|-------|
| AS120E                        | .250            | R (-03)                 | CRES         | .3750-24UNJF-3B           | .212              | 1.75  | .2930            | .095           | .69                         | .50         | .69   | .97   |
| AS120E                        | .250            | S                       | CRES         | .4375-20UNJF-3B           | .212              | 1.75  | .2930            | .115           | .69                         | .56         | .69   | .88   |
| AS120E                        | .250            | E (-06)                 | CRES         | .5625-18UNJF-3B           | .212              | 2.00  | .4120            | .115           | .80                         | .69         | .88   | 1.09  |
| AS120G                        | .375            | R (-04)                 | CRES         | .4375-20UNJF-3B           | .298              | 1.84  | .4120            | .115           | .80                         | .69         | .71   | 1.09  |
| AS120G                        | .375            | S                       | CRES         | .5625-18UNJF-3B           | .298              | 2.00  | .4120            | .204           | .80                         | .69         | .88   | 1.09  |
| AS120G                        | .375            | E (-08)                 | CRES         | .7500-16UNJF-3B           | .298              | 2.38  | .5600            | .204           | .80                         | .88         | 1.00  | 1.31  |
| AS120H                        | .500            | R (-06)                 | CRES         | .5625-18UNJF-3B           | .391              | 2.12  | .5600            | .204           | .97                         | .69         | .88   | 1.31  |
| AS120H                        | .500            | S                       | CRES         | .7500-16UNJF-3B           | .391              | 2.38  | .5600            | .289           | .97                         | .88         | 1.00  | 1.31  |
| AS120H                        | .500            | E (-10)                 | CRES         | .8750-14UNJF-3B           | .391              | 2.81  | .6730            | .289           | .97                         | 1.00        | 1.16  | 1.50  |
| AS120J                        | .625            | R (-08)                 | CRES         | .7500-16UNJF-3B           | .485              | 2.48  | .6730            | .289           | 1.11                        | .88         | 1.00  | 1.50  |
| AS120J                        | .625            | S                       | CRES         | .8750-14UNJF-3B           | .485              | 2.81  | .6730            | .349           | 1.11                        | 1.00        | 1.19  | 1.50  |
| AS120J                        | .625            | E (-12)                 | CRES         | 1.0625-12UNJ-3B           | .485              | 3.25  | .8100            | .349           | 1.11                        | 1.25        | 1.25  | 1.75  |
| AS120K                        | .750            | R (-10)                 | CRES         | .8750-14UNJF-3B           | .602              | 2.81  | .8100            | .349           | 1.38                        | 1.00        | 1.38  | 1.75  |
| AS120K                        | .750            | S                       | CRES         | 1.0625-12UNJ-3B           | .602              | 3.25  | .8100            | .434           | 1.38                        | 1.25        | 1.38  | 1.75  |
| AS120K                        | .750            | E (-16)                 | CRES         | 1.3125-12UNJ-3B           | .602              | 4.00  | 1.0620           | .434           | 1.38                        | 1.50        | 1.69  | 2.19  |
| AS120M                        | 1.000           | R (-12)                 | CRES         | 1.0625-12UNJ-3B           | .852              | 3.25  | .9350            | .434           | 1.66                        | 1.50        | 1.69  | 2.06  |
| AS120M                        | 1.000           | S                       | CRES         | 1.3125-12UNJ-3B           | .852              | 4.00  | 1.0620           | .646           | 1.66                        | 1.50        | 1.69  | 2.06  |
| AS120M                        | 1.000           | E (-20)                 | CRES         | 1.6250-12UNJ-3B           | .852              | 4.00  | 1.3160           | .646           | 1.66                        | 1.81        | 1.82  | 2.40  |

SAENORM.COM : Click to view the full PDF of AS120

|   |  |                               |                         |
|---|--|-------------------------------|-------------------------|
|  | <b>AEROSPACE STANDARD</b>  | <b>AS120™</b><br>SHEET 3 OF 8 | <b>REV.</b><br><b>K</b> |
|   | HOSE ASSEMBLY, PTFE, CRES REINFORCED,<br>3000 PSI, 400 °F, 90° TO 90°,<br>FLARELESS, LIGHTWEIGHT |                               |                         |

**TABLE 2 - HOSE AND SLEEVE OUTSIDE DIAMETER**

| SLEEVE CODE | SLEEVE MATERIAL   | TEMP LIMIT °F | TOLE-RANCE | HOSE OR SLEEVE OUTSIDE DIAMETER |
|-------------|---|---------------|------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
|             |   |               |            | /5/ HOSE SIZE .250              | /5/ HOSE SIZE .375              | /5/ HOSE SIZE .500              | /5/ HOSE SIZE .625              | /5/ HOSE SIZE .750              | /5/ HOSE SIZE 1.000             |
| -           | (-) INDICATES HOSE ONLY, NO SLEEVE (REFER TO AS1339)                        | 400           | MAX MIN    |                                 |                                 |                                 |                                 |                                 |                                 |
| A           | ABRASION SLEEVE TUBULAR (TFE-AS1291-CODE B) /6/                             | 400           | MAX MIN    | .500<br>.440                    | .600<br>.540                    | .730<br>.670                    | .840<br>.780                    | 1.110<br>1.050                  | 1.400<br>1.340                  |
| B           | ABRASION SLEEVE COIL (NYLON AS1294) /7/                                     | 275           | MAX MIN    | .450<br>.390                    | .550<br>.490                    | .695<br>.635                    | .810<br>.750                    | 1.080<br>1.020                  | 1.360<br>1.300                  |
| C           | FIRE SLEEVE (AS1072 SIL-FG) (15 MINUTES) /8/ /9/ /13/                       | 400           | MAX MIN    | .625<br>.500                    | .750<br>.625                    | .875<br>.750                    | 1.000<br>.875                   | 1.250<br>1.125                  | 1.500<br>1.375                  |
| D           | ABRASION SLEEVE INTEGRAL SILICONE COMPOSITE /10/ /14/                       | 350           | MAX MIN    | .500<br>.460                    | .600<br>.560                    | .700<br>.660                    | .830<br>.790                    | 1.120<br>1.070                  | 1.400<br>1.350                  |
| E           | ABRASION SLEEVE SHRINK-ON (FEP) /11/  | 350           | MAX MIN    | .424<br>.374                    | .540<br>.480                    | .665<br>.615                    | .790<br>.730                    | 1.070<br>1.010                  | 1.350<br>1.290                  |
| F           | ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /11/                 | 275           | MAX MIN    | .450<br>.400                    | .560<br>.505                    | .695<br>.645                    | .810<br>.750                    | 1.080<br>1.020                  | 1.360<br>1.300                  |
| G           | FIRE SLEEVE (AS1072 SIL-FG) (5 MINUTES) /8/ /9/ /12/                        | 400           | MAX MIN    | .625<br>.500                    | .750<br>.625                    | .875<br>.750                    | 1.000<br>.875                   | 1.250<br>1.125                  | 1.500<br>1.375                  |
| H           | FIRE SLEEVE INTEGRAL SILICONE (15 MINUTES) /13/                             | 400           | MAX MIN    | .660<br>.600                    | .745<br>.685                    | .895<br>.835                    | 1.005<br>.945                   | 1.240<br>1.160                  | 1.515<br>1.455                  |
| J           | FIRE SLEEVE INTEGRAL SILICONE (5 MINUTES) /12/                              | 400           | MAX MIN    | .660<br>.600                    | .745<br>.685                    | .895<br>.835                    | 1.005<br>.945                   | 1.240<br>1.160                  | 1.515<br>1.455                  |
| K           | INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /10/                           | 300           | MAX MIN    | .490<br>.444                    | .570<br>.535                    | .695<br>.650                    | .800<br>.760                    | 1.070<br>1.030                  | 1.350<br>1.310                  |
| L           | ABRASION SLEEVE COIL (PTFE-AS1293) /7/                                      | 400           | MAX MIN    | .500<br>.440                    | .600<br>.540                    | .730<br>.670                    | .862<br>.802                    | 1.110<br>1.050                  | 1.400<br>1.340                  |
| M           | FITTING CAPTURED INTEGRAL ABRASION SLEEVE (BRAIDED) WITH FLUID BARRIER /31/ | 275           | MAX MIN    | .530<br>.444                    | .610<br>.530                    | .740<br>.650                    | .870<br>.760                    | 1.105<br>1.025                  | 1.450<br>1.300                  |
| N           | THIN WALL FIRE SLEEVE INTEGRAL SILICONE (15 MINUTES) /13/                   | 400           | MAX MIN    | .625<br>.490                    | .725<br>.585                    | .850<br>.715                    | .955<br>.820                    | 1.230<br>1.080                  | 1.515<br>1.370                  |

**TABLE 3 - ASSEMBLY LENGTH TOLERANCE**

| HOSE ASSEMBLY LENGTH      | TOLERANCE  |
|---------------------------|------------|
| UNDER 18 INCHES           | ±.125 INCH |
| 18 TO 36 INCHES EXCLUSIVE | ±.250 INCH |
| 36 TO 50 INCHES EXCLUSIVE | ±.500 INCH |
| 50 INCHES AND OVER        | ±1%        |

|   |  |                               |                         |
|---|--|-------------------------------|-------------------------|
|  | <b>AEROSPACE STANDARD</b>  | <b>AS120™</b><br>SHEET 4 OF 8 | <b>REV.</b><br><b>K</b> |
|   | HOSE ASSEMBLY, PTFE, CRES REINFORCED,<br>3000 PSI, 400 °F, 90° TO 90°,<br>FLARELESS, LIGHTWEIGHT |                               |                         |

**TABLE 4 - HOSE WEIGHT MAX - ALL OTHERS REF**

| HOSE OR SLEEVE CODE | HOSE OR TYPE SLEEVE  | UNITS | HOSE SIZE .250 | HOSE SIZE .375 | HOSE SIZE .500 | HOSE SIZE .625 | HOSE SIZE .750 | HOSE SIZE 1.000 |
|---------------------|--|-------|----------------|----------------|----------------|----------------|----------------|-----------------|
| -                   | HOSE ONLY  | LB/IN | .009           | .015           | .020           | .027           | .058           | .085            |
| A                   | ABRASION SLEEVE (TFE-AS1291-CODE B)                                    | LB/IN | .003           | .004           | .004           | .005           | .007           | .009            |
| B                   | ABRASION SLEEVE (NYLON AS1294)   | LB/IN | .001           | .002           | .003           | .003           | .004           | .005            |
| C                   | FIRESLEEVE (15 MINUTES) AS1072   | LB/IN | .007           | .009           | .011           | .012           | .017           | .021            |
| D                   | ABRASION SLEEVE INTEGRAL WITH HOSE                                     | LB/IN | .012           | .016           | .024           | .034           | .067           | .110            |
| E                   | ABRASION SLEEVE (FEP)  | LB/IN | .002           | .003           | .003           | .005           | .006           | .007            |
| F                   | ABRASION SLEEVE (AS1073-CODE B)  | LB/IN | .002           | .003           | .003           | .004           | .005           | .006            |
| G                   | FIRESLEEVE (5 MINUTES) AS1072  | LB/IN | .007           | .009           | .011           | .012           | .017           | .021            |
| H                   | FIRESLEEVE INTEGRAL (15 MINUTES) WITH HOSE                             | LB/IN | .019           | .027           | .035           | .047           | .099           | .117            |
| J                   | FIRESLEEVE INTEGRAL (5 MINUTES) WITH HOSE                              | LB/IN | .019           | .027           | .035           | .047           | .099           | .117            |
| K                   | HOSE   | LB/IN | .012           | .016           | .022           | .030           | .060           | .090            |
| L                   | ABRASION SLEEVE POLYESTER WITH HOSE ABRASION SLEEVE (PTFE-AS1293)      | LB/IN | .003           | .004           | .005           | .005           | .006           | .007            |
| M                   | FITTING CAPTURED INTEGRAL ABRASION SLEEVE (BRAIDED) WITH FLUID BARRIER | LB/IN | .004           | .005           | .006           | .007           | .010           | .015            |
| N                   | THIN WALL FIRESLEEVE INTEGRAL SILICONE (15 MINUTES) WITH HOSE          | LB/IN | .018           | .026           | .034           | .045           | .098           | .117            |
| NONE                | FIRESLEEVE CLAMP   | LB/EA | .020           | .020           | .025           | .026           | .026           | .033            |
| NONE                | FITTING END (HOSE SIZE - 90°) /32/                                     | LB/EA | .078           | .126           | .218           | .327           | .615           | .945            |

**TABLE 5 - SLEEVE LENGTH**

| HOSE SIZE | LENGTH (INCHES) |
|-----------|-----------------|
| E<br>G    | 2.00 ± .25      |
| H<br>J    | 2.50 ± .25      |
| K<br>M    | 3.00 ± .25      |

**TABLE 6 - INTEGRAL FIRE SLEEVE CUFF DIMENSIONS /30/**

| HOSE SIZE | "K" MAX (INCHES) | "M" MAX (INCHES) |
|-----------|------------------|------------------|
| 04        | .96              | 2.05             |
| 06        | 1.08             | 2.18             |
| 08        | 1.22             | 2.55             |
| 10        | 1.37             | 2.67             |
| 12        | 1.54             | 2.67             |
| 16        | 1.87             | 3.10             |

NOTES:

/1/ LENGTH "L" IS A THREE DIGIT NUMBER OF WHICH THE FIRST TWO DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE THIRD DIGIT, THE FRACTION OF AN INCH IN EIGHTHS. IF HOSE LENGTH IS AN EXACT WHOLE NUMBER IN INCHES (NO FRACTIONAL LENGTH ADDITIONS), FOURTH DIGIT SHALL BE SPECIFIED AS "0".

LENGTH "L" IS MEASURED FROM "GAGE POINT" TO "GAGE POINT." FOR LENGTH TOLERANCES SEE TABLE 3. "END TO END" LENGTH MEASUREMENT IS THE SAME AS THE "GAGE POINT" TO "GAGE POINT" MEASUREMENT BECAUSE EACH END FITTING IS A 90° ELBOW.

|   |  |                               |                         |
|---|--|-------------------------------|-------------------------|
|  | <b>AEROSPACE STANDARD</b>  | <b>AS120™</b><br>SHEET 5 OF 8 | <b>REV.</b><br><b>K</b> |
|   | HOSE ASSEMBLY, PTFE, CRES REINFORCED,<br>3000 PSI, 400 °F, 90° TO 90°,<br>FLARELESS, LIGHTWEIGHT |                               |                         |

- /2/ HOSE ASSEMBLY INSIDE DIAMETER SHALL BE VERIFIED BY PASSING THE DESIGNATED, OR LARGER, SPHERICAL BALL PER TABLE 1 THROUGH THE HOSE ASSEMBLY.
- /3/ DISTANCE ACROSS CORNERS OF THE COUPLING NUT MAY EXCEED THIS DIMENSION.
- /4/ STANDARD COUPLING NUTS SHALL BE IN ACCORDANCE WITH AS21921 OR AS4370 AND MATE WITH AS33514 OR AS4375 FITTING ENDS. NONSTANDARD COUPLING NUTS MAY BE USED, PROVIDED THEY ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT, AND PROVIDED THEY CANNOT BE REMOVED FROM THE FITTING. NUTS SHALL MEET TORQUE TEST REQUIREMENTS PER AS1339.
- /5/ DIAMETERS ARE LISTED FOR CLAMP SELECTION. TUBULAR SLEEVES MAY NOT BE A PERFECT ROUND AND SHALL BE MEASURED WITH A DIAMETER TAPE RULE (OFTEN REFERRED TO AS A PI-TAPE).
- /6/ TUBULAR ABRASION (TFE) SLEEVES SHALL HAVE AN ID NO GREATER THAN HOSE OD +.05 INCH. AXIAL MOVEMENT OF THE SLEEVE INSTALLED ON THE HOSE SHALL NOT EXCEED .05 INCH. ENDS OF THE TUBULAR SLEEVE SHALL BE TERMINATED WITH A LENGTH OF AMS-DTL-23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR, PER TABLE 5 FIGURE 2.
- /7/ COIL ABRASION SLEEVES, WHEN ASSEMBLED ON A STRAIGHT HOSE, SHALL HAVE AN AVERAGE GAP BETWEEN COILS NOT EXCEEDING .05 INCH. DISPLACEMENT OF THE COILS OF THE SLEEVE, CAUSING A GREATER GAP, SHALL NOT BE CAUSE FOR REJECTION IF THE COILS CAN BE REPOSITIONED TO MEET THE GAP REQUIREMENTS. ENDS OF THE COIL SLEEVE SHALL BE TERMINATED WITH A LENGTH OF HEAT SHRINKABLE SLEEVING IN ACCORDANCE WITH TABLE 5 AND FIGURE 2. CODE "B" (NYLON COIL) ABRASION SLEEVES SHALL BE TERMINATED WITH AMS-DTL-23053/5 CLASS 1 OR 3, COLOR BLACK. CODE "L" (COIL ABRASION) SLEEVES SHALL BE TERMINATED WITH AMS-DTL-23053/12, CLASS 1, COLOR TRANSPARENT, PTFE (OPTIONAL AMS-DTL-23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR).
- /8/ THE TABLE 2 SLEEVE DIAMETERS FOR AS1072 SLEEVES APPLY WHEN THE SLEEVE IS COMPRESSED, OR CLAMPED, TO CONTACT THE HOSE. IN THIS CASE A WRINKLE MAY OCCUR OVER APPROXIMATELY 10% OF THE SLEEVE CIRCUMFERENCE.
- /9/ THE CUT ENDS OF THE FIRESLEEVE SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION, TO PREVENT WICKING OF FLUIDS. THE FIRESLEEVE ENDS SHALL BE SECURED TO THE HOSE ASSEMBLY END FITTINGS WITH CORROSION RESISTANT STEEL BANDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRESLEEVE, WHICH EXPOSE THE FIBERGLASS, SHALL BE COATED WITH RTV SILICONE RUBBER.
- /10/ INTEGRAL ABRASION SLEEVE SHALL FORM AN INTEGRAL, PERMANENT PART OF THE HOSE AND SHALL TERMINATE A MAXIMUM OF .200 INCH FROM THE END OF THE COLLAR.
- /11/ FEP AND POLYOLEFIN SHRINK ABRASION SLEEVES SHALL BE SHRUNK TO A SNUG FIT OVER THE HOSE AND END FITTING COLLARS.
- /12/ ADD "AS1055 TYPE IIb CLASS A-S/P" OR AS150 TYPE IX bA" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE, "FIRE RESISTANT" (5 MINUTES), WITH AS1055.
- /13/ ADD "AS1055 TYPE IIb CLASS B-S/P" OR "AS150 TYPE IX bB" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE, "FIRE PROOF" (15 MINUTES), WITH AS1055.
- /14/ SLEEVES CODED "D" ARE INACTIVE FOR FUTURE DESIGN AND SUPERSEDED BY CODE "K", AS OF THE RELEASE DATE OF REVISION "B" OF THIS STANDARD.
15. CONSTRUCTION AND PERFORMANCE: REFER TO AS1339. FITTINGS SHALL BE PERMANENTLY ATTACHED TO THE HOSE.
16. OPERATING CHARACTERISTICS: REFER TO AS1339.
17. MATERIALS:
- HOSE AND FITTINGS: PER AS1339.
  - SLEEVES: SEE APPLICABLE STANDARD, TABLE 2.
18. MARKING: MARKING SHALL BE PER AS1339 ON A STAINLESS STEEL BAND NOT OVER 1.0 INCH WIDE, OR ON THE COLLAR. THE CHARACTERS SHALL BE A MINIMUM OF .06 INCH HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOVEMENT AND RESULTANT CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND. HOSE ASSEMBLY DATE AND "PT" SYMBOL SHALL BE PERMANENTLY MARKED ON THE BAND OR ON AN END FITTING OR A FIRESLEEVE CLAMP.

|   |  |                               |                         |
|---|--|-------------------------------|-------------------------|
|  | <b>AEROSPACE STANDARD</b>  | <b>AS120™</b><br>SHEET 6 OF 8 | <b>REV.</b><br><b>K</b> |
|   | HOSE ASSEMBLY, PTFE, CRES REINFORCED,<br>3000 PSI, 400 °F, 90° TO 90°,<br>FLARELESS, LIGHTWEIGHT |                               |                         |