



AEROSPACE STANDARD

AS 1250

Society of Automotive Engineers, Inc.
400 COMMONWEALTH DRIVE, WARRENDALE, PA. 15086

Issued 1-15-76
Revised

ELBOW - FLARED TUBE, 90° WITH SEAL RING

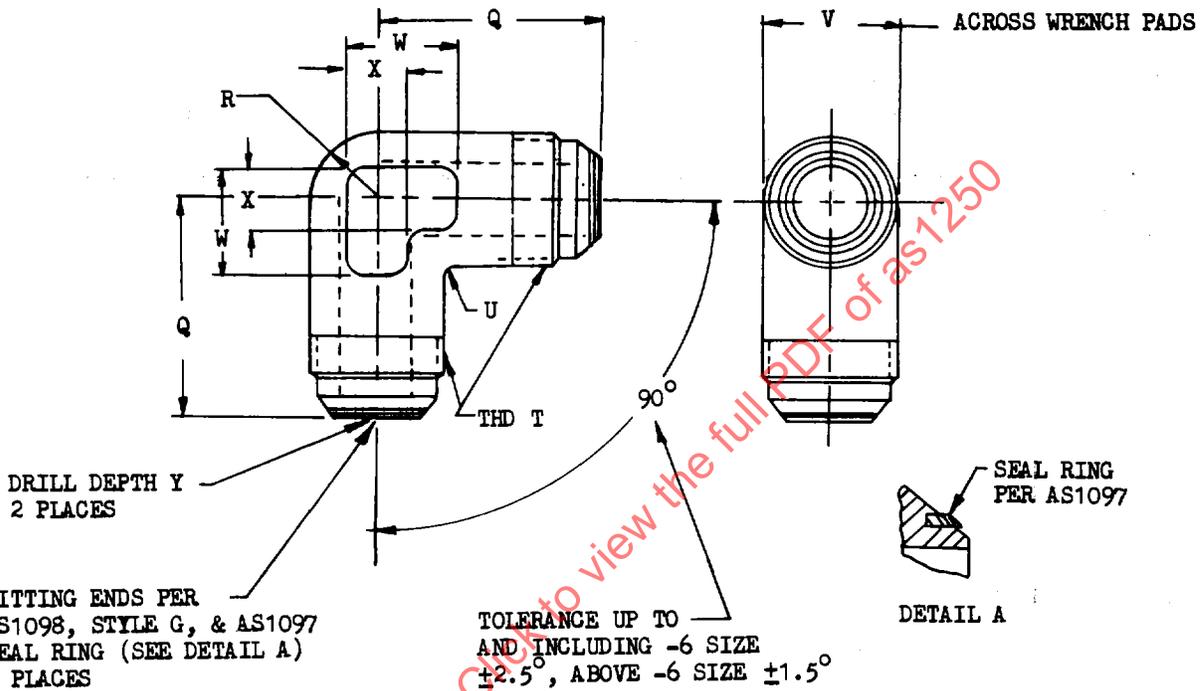


TABLE I (INCHES)

PART NUMBER SEE NOTE [4]	TUBING OD	THREAD T (REF)	+ .047 - .000	R RAD	U RAD	V	W APPROX	X APPROX	+ .047 - .000	WEIGHT LB (MAX)
AS1250-4	1/4	.4375-20	.891	.219	.063	.438	.375	.250	.938	.050
-6	3/8	.5625-18	1.063	.281	.094	.563	.500	.313	1.125	.087
-8	1/2	.7500-16	1.250	.375	.094	.750	.625	.438	1.313	.192
-10	5/8	.875-14	1.453	.438	.094	.875	.750	.438	1.516	.289
-12	3/4	1.0625-12	1.656	.531	.094	1.063	.875	.500	1.719	.436
-16	1	1.3125-12	1.813	.656	.125	1.313	1.063	.625	1.938	.659
-20	1-1/4	1.625-12	2.063	.813	.125	1.625	1.250	.750	2.188	1.162
AS1250-24	1-1/2	1.875-12	2.328	.938	.125	1.875	1.438	.875	2.484	1.528

- NOTES:
1. BREAK ALL SHARP EDGES, REMOVE ALL BURRS AND SLIVERS.
 2. DIMENSIONS IN INCHES, AND MILLIMETERS.
 3. TOLERANCES UNLES NOTED: DECIMALS: $\frac{\pm .406 \text{ mm}}{\pm .016 \text{ INCHES}}$, ANGLES: $\pm 0.5^\circ$
 - [4] ADD J, K, OR S AFTER PART NUMBER TO DESIGNATE MATERIAL.
 5. EXAMPLE OF PART NUMBER:
AS1250-4J = 1/4 OD TUBE CONNECTION OF 304 MATERIAL WITH AS1097 SEAL.

SAE Technical Board rules provide that: "All technical reports, including standards, approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents."