

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. C
AS1369™

FEDERAL SUPPLY CLASS
4730

RATIONALE


THIS TECHNICAL REPORT IS BEING STABILIZED BECAUSE IT COVERS TECHNOLOGY, PRODUCTS, OR PROCESSES WHICH ARE MATURE AND NOT LIKELY TO CHANGE IN THE FORESEEABLE FUTURE.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as1369c

For more information on this standard, visit
<https://www.sae.org/standards/content/AS1369C/>

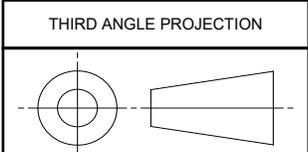

CUSTODIAN: G-3/G-3B		PROCUREMENT SPECIFICATION: KSC-F-124 /4/	
	AEROSPACE STANDARD		AS1369™
	FITTING, PLUG, FLARED TUBE, FOR SEAL RING		

ISSUED 1976-07 REVISED 2006-07 REAFFIRMED 2013-01 STABILIZED 2024-01

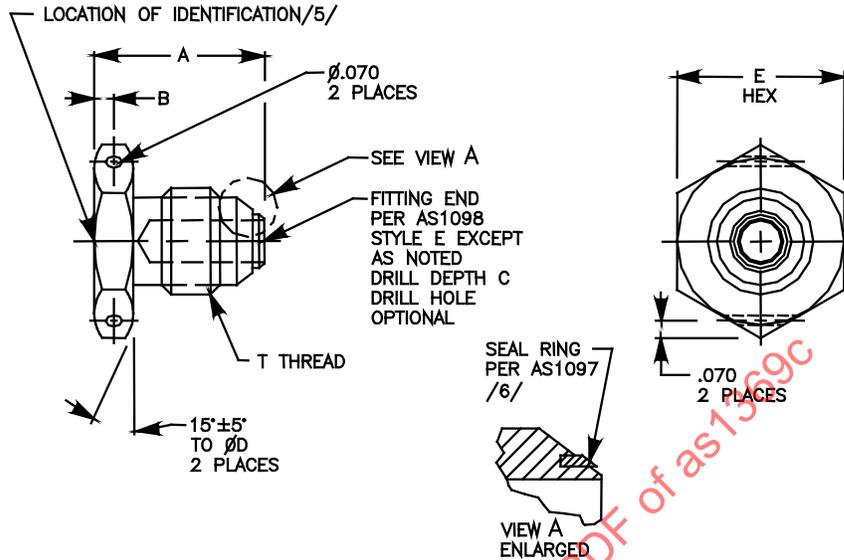


FIGURE 1 - FITTING, PLUG, FLARED TUBE

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NUMBER AS1369 /14/ SIZE CODE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3A	A +.000 -.060	B ±.030	C +.000 -.060	D ±.010	E	LB/EA APPROX REF ALUM	LB/EA APPROX REF CRES
04	.250	.4375-20UNJF	.750	.092	.531	.668	.678-.691	.0072	.0209
06	.375	.5625-18UNJF	.828	.128	.563	.792	.802-.815	.0134	.039
08	.500	.7500-16UNJF	.953	.140	.625	.980	.990-1.003	.0279	.081
10	.625	.8750-14UNJF	1.125	.176	.766	1.103	1.113-1.128	.0455	.132
12	.750	1.0625-12UNJ	1.219	.170	.813	1.353	1.363-1.380	.072	.210
16	1.000	1.3125-12UNJ	1.297	.185	.813	1.603	1.613-1.630	.107	.311
20	1.250	1.6250-12UNJ	1.375	.201	.750	1.853	1.863-1.880	.162	.470
24	1.500	1.8750-12UNJ	1.500	.201	.813	2.099	2.109-2.135	.246	.714
28	1.750	2.2500-12UNJ	1.625	.201	.781	2.474	2.484-2.510	.361	1.047
32	2.000	2.5000-12UNJ	1.750	.201	.828	2.724	2.734-2.760	.578	1.680



AEROSPACE STANDARD

FITTING, PLUG, FLARED TUBE,
FOR SEAL RING

AS1369™
SHEET 1 OF 3

REV.
C

NOTES:

1/ MATERIAL:

- a. CODE LETTER D: TYPE 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR AMS 4112; OR, TYPE 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6.
- b. CODE LETTER J: 304 CORROSION RESISTANT STEEL BAR PER AMS-QQ-S-763 OR AMS 5639.
- c. CODE LETTER K: 316 CORROSION RESISTANT STEEL BAR PER AMS-QQ-S-763 OR AMS 5648.
- d. CODE LETTER R: 321 CORROSION RESISTANT STEEL BAR PER AMS-QQ-S-763 OR AMS 5645.
- e. CODE LETTER S: 347 CORROSION RESISTANT STEEL BAR PER AMS-QQ-S-763 OR AMS 5646.
- f. CODE LETTER W: TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9 OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124.

2. HEAT TREAT:

- a. ALL CODE LETTERS: NONE

3. FINISH:

- a. MATERIAL CODE LETTER D: ANODIZE PER MIL-A-8625 TYPE II, CLASS 2, DYE BLUE AND DUPLEX SEAL PER PROCUREMENT SPECIFICATION.
- b. MATERIAL CODE LETTERS J, K, R AND S; PASSIVATE PER AMS 2700, TYPE 6 OR TYPE 7.
- c. MATERIAL CODE LETTER W: ANODIZE PER AMS 2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE BROWN, DUPLEX SEAL PER PROCUREMENT SPECIFICATION.

/4/ PROCUREMENT SPECIFICATION: KSC-F-124 JOHN F KENNEDY SPACE CENTER, NASA, SPECIFICATION FOR FITTINGS (PRESSURE CONNECTIONS), FLARED TUBE. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER LISTED IN "PERFORMANCE REVIEW INSTITUTE" (PRI) "QUALIFIED MANUFACTURER LIST" (QML) FOR THIS TYPE PRODUCT. THE QML IS AVAILABLE AT www.eauditnet.com. NADCAP QML AS7112, 7112/2

/5/ IDENTIFICATION: MARK PER AS478 CLASS C OR CLASS D; METHOD 7A3, 15A3 OR 15B.

- a. FOR SIZES 06 (.375 OD TUBE SIZE) AND SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS" AND MATERIAL CODE LETTER.
- b. FOR SIZES 08 (.500 OD TUBE SIZE) AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER AND MATERIAL CODE LETTER.

/6/ THE SEAL RING IS ORDERED SEPARATELY AS AN AS1097.

7. INTERPRETATION OF DRAWING PER ARP4296.

8. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M: REQUIREMENTS PER ASME B46.1 UNLESS OTHERWISE SPECIFIED; MACHINED SURFACES ARE TO BE 125 μ in Ra.

9. BREAK EDGES TO .003-.015 OTHERWISE SPECIFIED.

10. DIMENSIONING AND TOLERANCING: ASME Y14.5M-1994

	AEROSPACE STANDARD	AS1369™ SHEET 2 OF 3	REV. C
	FITTING, PLUG, FLARED TUBE, FOR SEAL RING		