

SAE-AS14238

ADOPTION NOTICE

SAE-AS14238, Bushing, Sleeve Flanged, Press Fit, Ream Type, issued August 1997, was adopted on 25 August 1997 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Naval Air Systems Command, Attn: Commander, Naval Air Warfare Center Aircraft Division, Code 414100B120-3, Highway 547, Lakehurst, NJ 08733-5100. DoD activities may obtain copies of this document from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. The private sector and other Government agencies may purchase copies from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

Custodians:

Army - AV
Navy - AS
Air Force - 99

Adopting activity:

Navy - AS
(Project 3120-0796)

SAENORM.COM : Click to view the full PDF of as 14238

FSC 3120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
3120

AS14238

NOTICE

This document has been taken directly from U.S. Military Standard, MS14238A, and contains only minor editorial and format changes required to bring it into conformance with the publishing requirements of SAE technical standards.

The original Military Standard was adopted as an SAE standard under the provisions of the SAE Technical Standards Board (TSB) Rules and Regulations (TSB 001) pertaining to accelerated adoption of government specifications and standards. TSB rules provide for (a) the publication of portions of unrevised government specifications and standards without consensus voting at the SAE Committee level, (b) the use of the existing government specification or standard format, and (c) the exclusion of any qualified product list (QPL) sections.

SAENORM.COM : Click to view the full PDF of as14238

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1997-08

PREPARED BY AIRFRAME CONTROL BEARINGS GROUP



AEROSPACE STANDARD

BUSHING, SLEEVE FLANGED, PRESS FIT, REAM TYPE

AS14238
SHEET 1 OF 3

Copyright 1997 Society of Automotive Engineers, Inc.
All rights reserved.

Printed in the U.S.A.


QUESTIONS REGARDING THIS DOCUMENT:
TO PLACE A DOCUMENT ORDER:

(412) 772-8510
(412) 776-4970

FAX: (412) 776-0243

Ⓕ Distributed under license from the IHS Archive

AS14238

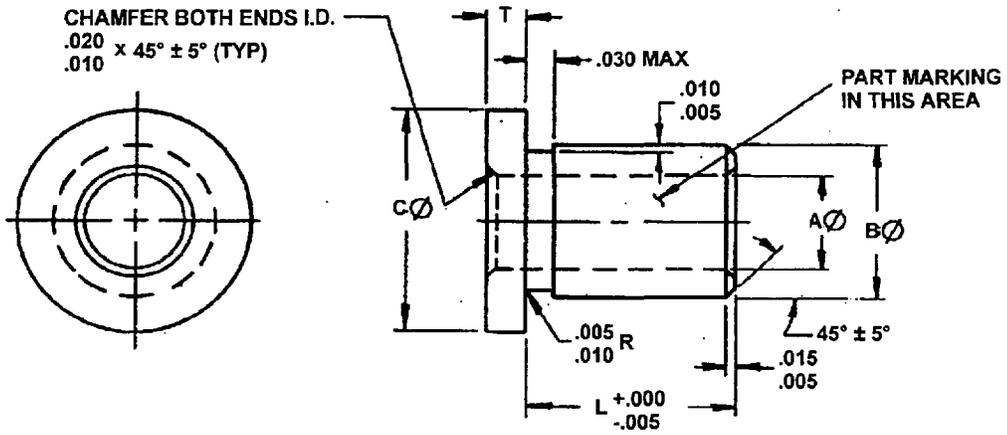

SIZE DASH NO.	ROD DIA.	A Ø	B Ø	RECH'D HOUSING BORE	INTERFERENCE FIT (REF)	C Ø	T ±.002
-03	.1900	.177 .184	.3142 .3137	.3133 .3125	.0017 .0004	.447 .427	.062
-04	.2500	.235 .243	.3767 .3762	.3768 .3750	.0017 .0004	.510 .490	.062
-05	.3125	.299 .307	.4393 .4388	.4383 .4375	.0018 .0005	.572 .552	.062
-06	.3750	.356 .364	.5020 .5013	.5008 .5000	.0020 .0005	.635 .615	.062
-07	.4375	.421 .428	.5646 .5639	.5634 .5625	.0021 .0005	.697 .677	.062
-08	.5000	.483 .490	.6272 .6264	.6259 .6250	.0022 .0005	.760 .740	.062
-10	.6250	.608 .615	.8150 .8140	.8134 .8125	.0025 .0006	1.010 .990	.094
-10A	.6250	.608 .615	.8150 .8140	.8134 .8125	.0025 .0006	1.010 .990	.062
-12	.7500	.732 .742	.9400 .9390	.9384 .9375	.0025 .0006	1.135 1.115	.094
-14	.8750	.857 .867	1.0651 1.0641	1.0635 1.0625	.0026 .0006	1.260 1.240	.094
-16	1.0000	.982 .992	1.1901 1.1891	1.1885 1.1875	.0026 .0006	1.385 1.365	.094
-18	1.1250	1.107 1.117	1.3151 1.3141	1.3136 1.3125	.0026 .0006	1.510 1.490	.125
-20	1.2500	1.232 1.242	1.4401 1.4391	1.4386 1.4375	.0026 .0006	1.635 1.615	.125

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD
BUSHING, SLEEVE FLANGED, PRESS FIT, REAM TYPE

AS14238
SHEET 2 OF 3