

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS15002

FEDERAL SUPPLY CLASS
4730

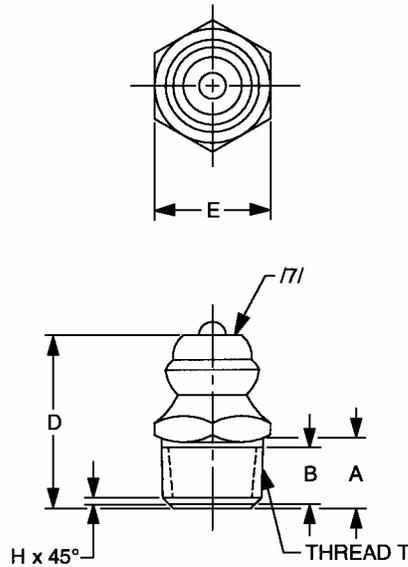


FIGURE 1 - FITTING, STRAIGHT


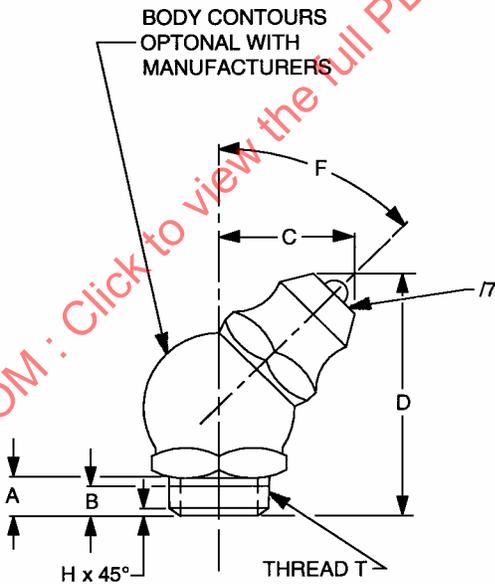


FIGURE 2 - FITTING, ELBOW

INACTIVE IN PART - SEE NOTE /16/

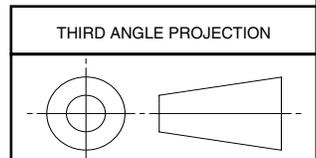

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS35411 /5/



AEROSPACE STANDARD
FITTING, LUBRICATION, HYDRAULIC, SURFACE CHECK,
STRAIGHT THREADS, STEEL, TYPE II

AS15002
SHEET 1 OF 3

REV.
A

Copyright 2005 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

SAENORM.COM : Click to view the full PDF of as15002a

ISSUED 2001-05 REVISED 2005-08

TABLE 1 - DIMENSIONS AD WEIGHTS

PART NUMBER	FIG.	THREAD T PER FED-STD-H28/2	A ±.031	B /6/	C MAX.	D MAX.	E ±.003	F ±5°	H	LB/100 APPROX. REF STEEL
AS15002-1	1	.250-28 UNF-2A	.125	.075	—	.531	.281	—	.036	
AS15002-2	1	.3125-32 UNEF-2A	.125	.075	—	.562	.312	—	.031	
AS15002-3	2	.250-28 UNF-2A	.125	.075	.438	.750	.375	45°	.036	
AS15002-4	1	.3125-32 UNEF-2A	.125	.075	.500	.750	.375	65°	.031	

NOTES:

1. MATERIALS: STEEL. SEE PROCUREMENT SPECIFICATION.
2. HEAT TREATMENT: NONE.
3. FINISH: CADMIUM PLATE OR ZINC PLATE. SEE PROCUREMENT SPECIFICATION.
 - a. CODE LETTER C – CADMIUM PLATE /17/
 - b. CODE LETTER P – ZINC PLATE
4. IDENTIFICATION: MARK PER AS478 METHOD 35D MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, AND PART NUMBER.
- /5/ PROCUREMENT SPECIFICATION: AS35411 EXCEPT AS SPECIFIED ON THIS STANDARD. THE DRAWING AND ALL THE SPECIFIED DOCUMENTS DEFINE THE REQUIREMENTS FOR THE END PRODUCT. ALL THE REQUIREMENTS MUST BE MET IN ORDER TO IDENTIFY THE ITEM WITH THAT PART NUMBER.
- /6/ MINIMUM EFFECTIVE THREAD LENGTH.
- /7/ FITTING END IN ACCORDANCE WITH AS15000, STYLE OPTIONAL.
8. INTENDED USE: THIS PART IS INTENDED FOR USE IN LUBRICATING CONNECTIONS AT PRESSURES TO 8000 psi.
9. THIS STANDARD IS A CONVERSION OF MILITARY STANDARD MS15002, FITTINGS, LUBRICATION (HYDRAULIC) SURFACE CHECK, STRAIGHT THREADS, STEEL, TYPE II, AND IS NOT A WORD-FOR-WORD CONVERSION.
10. INTERPRETATION OF DRAWING PER ARP4296.
11. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M; REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, MACHINED SURFACES TO BE 125 µin Ra. SURFACES OF HEX FLATS MAY BE 250 µin Ra.
12. BREAK EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONING AND TOLERANCING: ASME Y14.5M-1994.
14. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±0°30'.