

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS15003

FEDERAL SUPPLY CLASS
4730

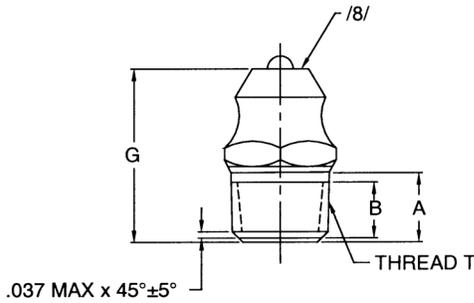



FIGURE 1 - FITTING, STRAIGHT


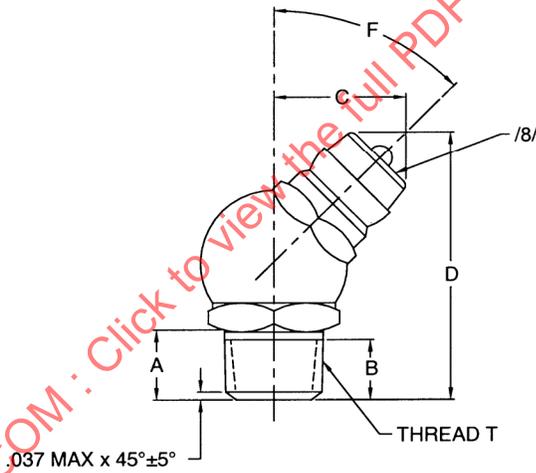


FIGURE 2 - FITTING, ELBOW

SAENORM.COM : Click to view the full PDF of as15003a

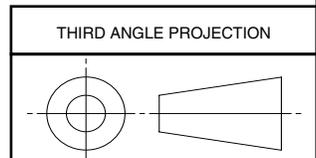

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS35411 /5/



AEROSPACE STANDARD

FITTING, LUBRICATION, HYDRAULIC, SURFACE CHECK,
1/8 PIPE THREADS, STEEL, TYPE III

AS15003
SHEET 1 OF 3

REV.
A

Copyright 2005 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2001-05 REVISED 2005-08

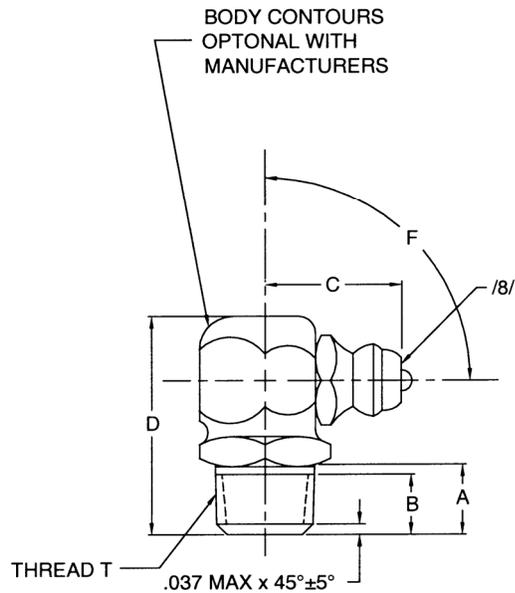


FIGURE 3 - FITTING, ELBOW 90°

TABLE 1 - DIMENSIONS AD WEIGHTS

PART NUMBER	FIG.	THREAD T /6/	A ±.031	B /7/	C MAX.	D MAX.	E ±.003	F ±5°	G ±.062	LB/100 APPROX. REF STEEL
AS15003-1	1	1/8-27	.281	.1875	—	—	.438	—	.688	
AS15003-2	1	1/8-27	.750	.1875	—	—	.438	—	1.250	
AS15003-3	2	1/8-27	.281	.1875	.375	1.156	.438	30°	—	
AS15003-4	2	1/8-27	.281	.1875	.500	1.094	.438	45°	—	
AS15003-5	2	1/8-27	.281	.1875	.625	.969	.438	65°	—	
AS15003-6	3	1/8-27	.281	.1875	.625	.938	.438	90°	—	
AS15003-7	3	1/8-27	.281	.1875	.562	1.188	.438	105°	—	

NOTES:

1. MATERIAL: STEEL. SEE PROCUREMENT SPECIFICATION.
2. HEAT TREATMENT: NONE.
3. FINISH:
 - a. CODE LETTER C – CADMIUM PLATE, SEE PROCUREMENT SPECIFICATION. /17/
 - b. CODE LETTER P – ZINC PLATE, SEE PROCUREMENT SPECIFICATION.
4. IDENTIFICATION: MARK PER AS478 METHOD 35D MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, AND PART NUMBER.

/5/ PROCUREMENT SPECIFICATION: AS35411 EXCEPT AS SPECIFIED ON THIS STANDARD. THE DRAWING AND ALL THE SPECIFIED DOCUMENTS DEFINE THE REQUIREMENTS FOR THE END PRODUCT. ALL THE REQUIREMENTS MUST BE MET IN ORDER TO IDENTIFY THE ITEM WITH THAT PART NUMBER.