


Submitted for recognition as an American National Standard


FEDERAL SUPPLY CLASS  
4720

REV.  
B

AS1506

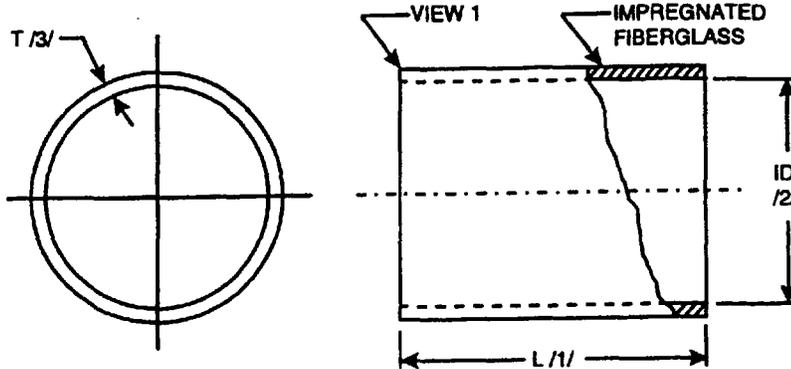

BEADED ENDS IN ACCORDANCE WITH AS1501  
APPLICABLE TO GRADES "A" AND "B"



VIEW 1

FIGURE 1

TABLE 1 - TABULATION OF OPERATING PRESSURE AND PART NUMBER GRADES

GRADE	TYPE (OPERATING TEMPERATURE)	OPERATING PRESSURE RATING (PSI) (*0" PSI TO PRESSURE LISTED BELOW) /4/											
		HOSE INSIDE DIAMETER (INCHES)											
		01	02	03	04	05	06	07	08	09	10	11	12
A /5/	I	40	34	28	22	16	12	8	6	4	3	3	2
A /6/	II												
C /7/	I	20	17	14	11	8	6	4	3	2	2	1	1
D /7/	II												

TABLE 2 - TABULATION OF HOSE LENGTH SPECIFICATIONS

ID HOSE INSIDE DIAMETER (INCH)	L - HOSE LENGTH (INCHES)		
	GRADES "A" AND "B" MINIMUM /8/	GRADES "C" AND "D" MINIMUM /8/	ALL GRADES MAXIMUM
.50 TO 4.00	3.50	2.75	6.00
4.25 TO 12.00	3.75	3.00	

TABLE 3 - TABULATION OF AVAILABLE HOSE LENGTH INCREMENTS AND TOLERANCES

L - HOSE LENGTH (INCHES)	AVAILABLE LENGTH INCREMENT (INCH)	L - LENGTH TOLERANCE (INCH)
2.00 TO 6.00	.25	±.12

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS1501



**AEROSPACE STANDARD**

HOSE, AIR DUCT, SEMIFLEXIBLE, SLEEVE SECTION,  
UNREINFORCED, SELF EXTINGUISHING

**AS1506**  
SHEET 1 OF 3

**REV.  
B**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1978-11 REVISED 1998-06

REV. B  
AS1506

FLAG NOTES:

- /1/ LENGTH "L" IS A TWO DIGIT NUMBER OF WHICH THE FIRST DIGIT DESCRIBES THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE SECOND DIGIT, THE FRACTION OF AN INCH IN FOURTHS. SEE TABLE 2 AND 3 FOR LENGTH SPECIFICATION AND TOLERANCES.
- /2/ DIAMETERS ARE IN .25 INCH INCREMENTS. MINIMUM INSIDE DIAMETER (ID) IS .50 INCH AND MAXIMUM INSIDE DIAMETER (ID) IS 12.00 INCHES. INSIDE DIAMETER TOLERANCE IS -.01 TO +.03 INCH.
- /3/ HOSE WALL THICKNESS VARIES FROM .040 TO .080 INCH FOR GRADES "A" AND "B" AND .020 TO .050 INCH FOR GRADES "C" AND "D".
- /4/ FOR FRACTIONAL DIAMETER HOSE OPERATING PRESSURE, USE PRESSURE LISTED FOR NEXT LARGEST HOSE DIAMETER.
- /5/ GRADES "A" - MAXIMUM HOSE WEIGHT: .10 LB/FT (LENGTH)/INCH DIAMETER  
 MAXIMUM HOSE LEAKAGE: .01 SCFM/FT (LENGTH)/INCH DIAMETER  
 TOTAL JOINT LEAKAGE: .10 SCFM/INCH DIAMETER
- /6/ GRADE "B" - MAXIMUM HOSE WEIGHT: .12 LB/FT (LENGTH)/INCH DIAMETER  
 MAXIMUM HOSE LEAKAGE: .01 SCFM/FT (LENGTH)/INCH DIAMETER  
 TOTAL JOINT LEAKAGE: .10 SCFM/INCH (DIAMETER)
- /7/ GRADES "C" AND "D" - MAXIMUM HOSE WEIGHT: .075 LB/FT (LENGTH)/INCH DIAMETER  
 MAXIMUM HOSE LEAKAGE: .02 SCFM/FT (LENGTH)/INCH DIAMETER  
 TOTAL JOINT LEAKAGE: .10 SCFM/INCH DIAMETER
- /8/ MINIMUM HOSE LENGTH MAY BE REDUCED BY .75 WHEN USING NAS 1922 CLAMP.

PROCUREMENT SPECIFICATION: AS1501, FORM 4, TYPES I AND II

MATERIAL: IN ACCORDANCE WITH AS1501

FINISH: AS MANUFACTURED

MARKING: IN ACCORDANCE WITH AS1501

OPERATING TEMPERATURE: TYPE I, -65 °F TO +250 °F (-54 °C TO +121 °C)  
TYPE II, -65 °F TO +500 °F (-54 °C TO +260 °C)

GENERAL NOTES:

- A. HOSE SOFT ENDS SHALL BE SUITABLE FOR INSTALLATION OVER A RIGID TUBE END WITH MS33660, TYPE "A" BEAD, OR AS5131.
- B. HOSE CLAMP AND TORQUE REQUIREMENTS SHOULD BE SPECIFIED ON INSTALLATION DRAWING. ALLOWABLE HOSE PRESSURE AND HOSE END LEAKAGE ARE DEPENDENT ON TYPE CLAMP USED, CLAMP TORQUE AND STIFFNESS AND CONFIGURATION OF RIGID HOSE END.
- C. DO NOT USE UNASSIGNED DIAMETER AND LENGTH CODES.
- D. THE CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT.

**SAE** The Engineering Society  
 For Advancing Mobility  
 Land Sea Air and Space  
**INTERNATIONAL**  
 400 Commonwealth Drive, Warrendale, PA 15096-0001

**AEROSPACE STANDARD**  
 HOSE, AIR DUCT, SEMIFLEXIBLE, SLEEVE SECTION,  
 UNREINFORCED, SELF EXTINGUISHING

**AS1506**  
 SHEET 2 OF 3

**REV. B**