
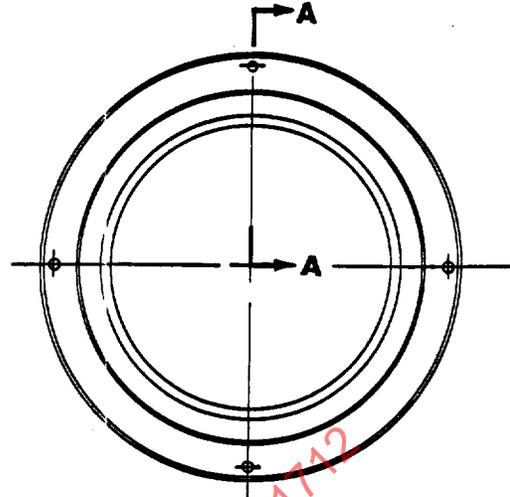


AS1712

SAE Technical Board rules provide that: "All technical reports, including standards approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents."

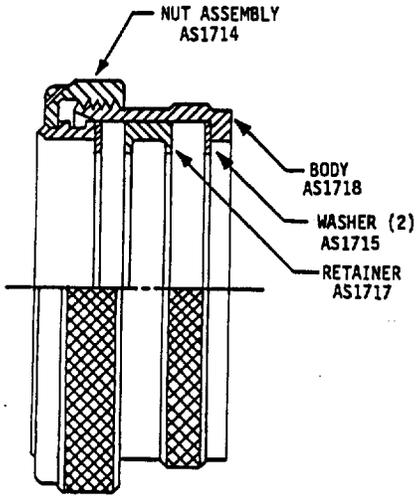

SECTION A-A

**COUPLING SUB-ASSEMBLY, FLEXIBLE**

COUPLING SUB-ASSEMBLY WEIGHTS

AS1712 DASH NO.	TUBE SIZE (REF)	O-RING DASH NO. (REF) ①	SUB-ASSEMBLY WEIGHT MAXIMUM (LBS)
- 08	1/2	114	
- 10	5/8	116	
- 12	3/4	212	
- 16	1	216	
- 20	1 1/4	220	
- 24	1 1/2	326	
- 28	1 3/4	328	
- 32	2	330	
- 36	2 1/4	332	
- 40	2 1/2	334	
- 48	3	338	
- 56	3 1/2	342	
- 64	4	346	
- 72	4 1/2	426	
- 80	5	430	
- 88	5 1/2	434	

FLAG NOTES:

- ① THE DASH NUMBERS LISTED IN THE TABULATION ARE STANDARD O-RING SIZES AS DEFINED BY AS568, AND ARE NOT A PART OF THIS ASSEMBLY.

SAENORM.COM · Click to view the full PDF of as1712

Issued May, 1982 Revised

Society of Automotive Engineers, Inc.  
400 COMMONWEALTH DRIVE WARRENDALE, PA 15096

**AEROSPACE STANDARD**  
COUPLING SUB-ASSEMBLY, FLEXIBLE,  
VARIABLE CAVITY, THREADED, FERRULE TYPE TUBE ENDS

**AS1712** SH 1 OF 2