

AS1714
REV. B

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

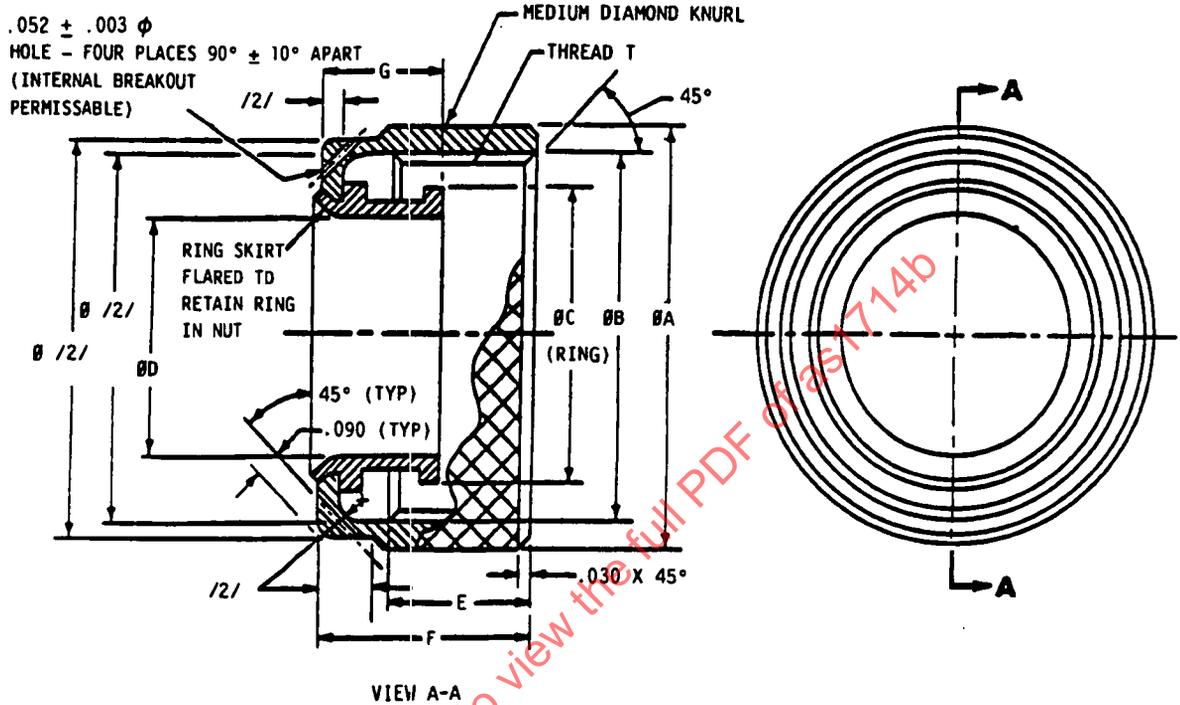


FIGURE 1

SAENORM.COM : Click to view the full PDF of AS1714b

ISSUED 1982-05 REVISED 1992-07-15 (B)

CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: 1/2 AS1710

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

NUT ASSEMBLY, COUPLING, FLEXIBLE,
VARIABLE CAVITY, THREADED,
FERRULE TYPE TUBE ENDS

AS1714

SHEET 1 OF 3

REV.

B

REV.
B

AS1714

TABLE 1 - COUPLING NUT ASSEMBLY DIMENSIONS AND WEIGHTS

AS1714 DASH NO	TUBE SIZE (REF)	THREAD T PER H2B/2	A		C +.000/- .005 /1/	D MIN	E COMPL THREAD DEPTH		WEIGHT MAX (LB) ALUMINUM		WEIGHT MAX (LB) CRES
			MAX DIA OF KNURL	B ±.005			F	G			
08	.500	1.000-12 UNF-2B	1.157	1.045	.780	.693	.361	.638	.390	.019	.054
10	.625	1.125-12 UNF-2B	1.282	1.170	.905	.818	.361	.638	.390	.025	.068
12	.750	1.375-12 UNF-2B	1.532	1.420	1.086	.998	.334	.611	.363	.030	.083
16	1.000	1.625-12 UN-2B	1.782	1.670	1.362	1.274	.334	.611	.363	.036	.100
20	1.250	1.875-12 UN-2B	2.032	1.920	1.612	1.524	.334	.611	.363	.042	.117
24	1.500	2.250-12 UN-2B	2.407	2.295	1.882	1.794	.334	.611	.363	.051	.143
28	1.750	2.500-12 UN-2B	2.657	2.545	2.132	2.044	.334	.611	.363	.060	.168
32	2.000	2.875-12 UN-2B	3.052	2.905	2.435	2.317	.334	.611	.363	.080	.222
36	2.250	3.125-12 UN-2B	3.302	3.170	2.685	2.567	.334	.611	.363	.089	.247
40	2.500	3.250-12 UN-2B	3.427	3.295	2.935	2.817	.334	.611	.363	.085	.236
44	2.750	3.500-12 UN-2B	3.677	3.545	3.185	3.067	.334	.611	.363	.092	.257
48	3.000	3.750-12 UN-2B	3.927	3.795	3.435	3.317	.334	.611	.363	.100	.280
56	3.500	4.250-12 UN-2B	4.427	4.295	3.947	3.829	.334	.611	.363	.123	.343
64	4.000	4.750-12 UN-2B	4.928	4.796	4.456	4.338	.334	.611	.363	.137	.383
72	4.500	5.500-12 UN-2B	5.678	5.546	4.957	4.839	.306	.611	.363	.197	.552
80	5.000	6.000-12 UN-2B	6.178	6.046	5.494	5.359	.306	.611	.333	.217	.608
88	5.500	6.375-12 UNS-2B	6.553	6.421	5.995	5.859	.334	.644	.366	.212	.594