

REV.
C

AS1714

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


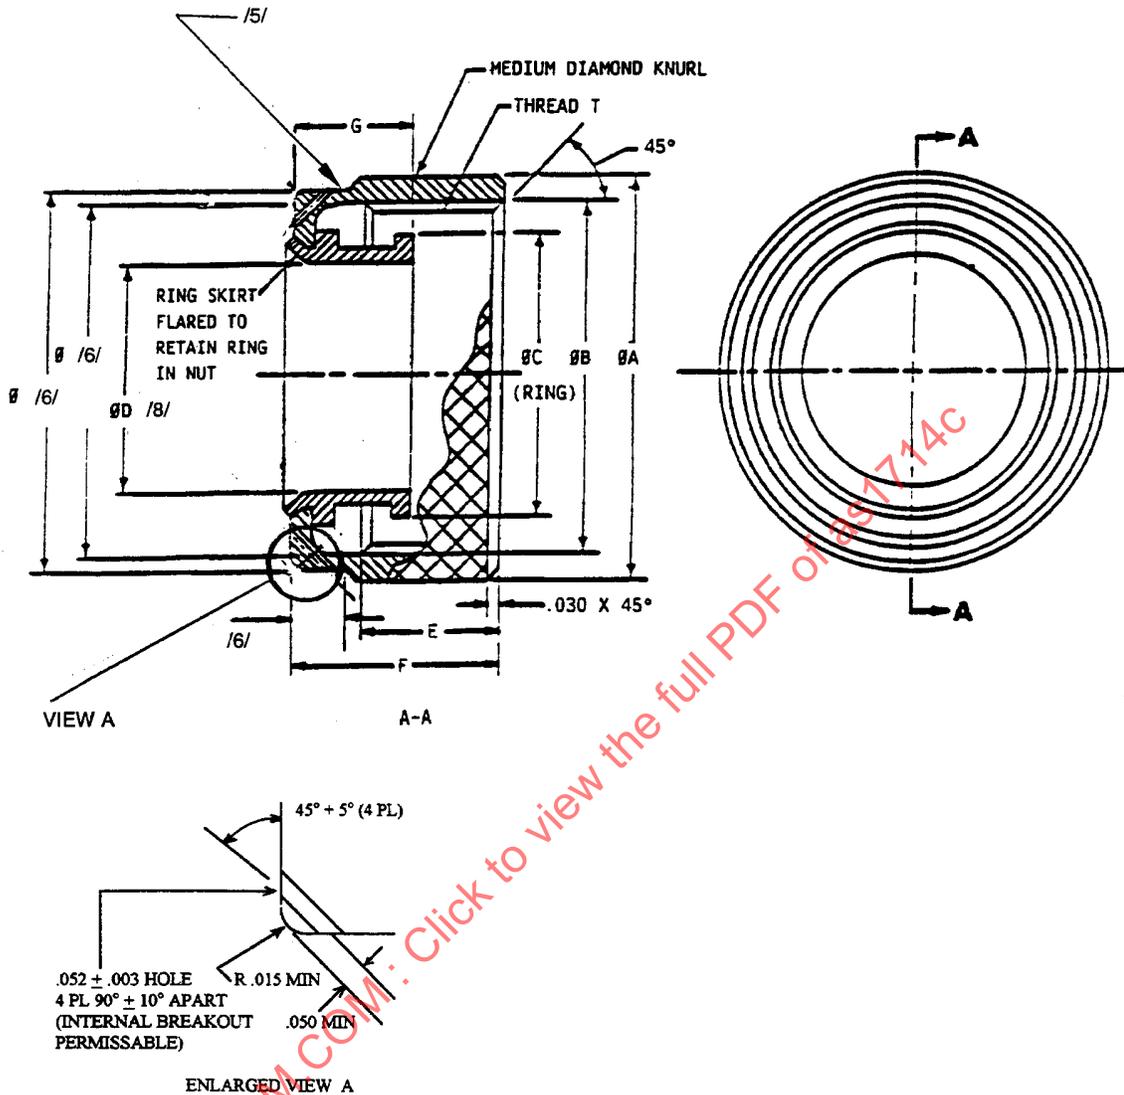


FIGURE 1 - NUT ASSEMBLY

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /4/ AS1710



AEROSPACE STANDARD

NUT ASSEMBLY, COUPLING, FLEXIBLE, VARIABLE CAVITY, THREADED, FERRULE TYPE TUBE ENDS

AS1714
SHEET 1 OF 3

REV. C

ISSUED 1982-05 REVISED 1995-09 REAFFIRMED 2001-12

REV.
C

AS1714

TABLE 1 - COUPLING NUT ASSEMBLY DIMENSIONS AND WEIGHTS

BASIC NO. AS1714 SIZE CODE	(TUBE SIZE)	THREAD T PER FED-STD-H28/2	A		C +0.000/-0.005 /13/	D MIN	E COMPL THREAD			LB/EA MAX ALUMINUM	LB/EA MAX CRES
			MAX DIA OF KNUURL	B ±.005			DEPTH MIN	F	G		
08	.500	1.000-12 UNF-2B	1.157	1.045	.780	.693	.361	.638	.390	.024	.054
10	.625	1.125-12 UNF-2B	1.282	1.170	.905	.818	.361	.638	.390	.025	.068
12	.750	1.375-12 UNF-2B	1.532	1.420	1.086	.998	.334	.611	.363	.030	.083
16	1.000	1.625-12 UN-2B	1.782	1.670	1.362	1.274	.334	.611	.363	.036	.100
20	1.250	1.875-12 UN-2B	2.032	1.920	1.612	1.524	.334	.611	.363	.042	.117
24	1.500	2.250-12 UN-2B	2.407	2.295	1.882	1.794	.334	.611	.363	.051	.143
28	1.750	2.500-12 UN-2B	2.657	2.545	2.132	2.044	.334	.611	.363	.060	.168
32	2.000	2.875-12 UN-2B	3.052	2.905	2.435	2.317	.334	.611	.363	.080	.222
36	2.250	3.125-12 UN-2B	3.302	3.170	2.685	2.567	.334	.611	.363	.089	.247
40	2.500	3.250-12 UN-2B	3.427	3.295	2.935	2.817	.334	.611	.363	.085	.236
44	2.750	3.500-12 UN-2B	3.677	3.545	3.185	3.067	.334	.611	.363	.092	.257
48	3.000	3.750-12 UN-2B	3.927	3.795	3.435	3.317	.334	.611	.363	.100	.280
56	3.500	4.250-12 UN-2B	4.427	4.295	3.947	3.829	.334	.611	.363	.123	.343
64	4.000	4.750-12 UN-2B	4.928	4.796	4.456	4.338	.334	.611	.363	.137	.383
72	4.500	5.500-12 UN-2B	5.678	5.546	4.957	4.839	.306	.611	.363	.197	.552
80	5.000	6.000-12 UN-2B	6.178	6.046	5.494	5.359	.306	.611	.333	.217	.608
88	5.500	6.375-12 UNS-2B	6.553	6.421	5.995	5.859	.334	.644	.366	.212	.594

SAENORM.COM : Click to view the full PDF of AS1714C