

**AS1716** REV. **B**

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

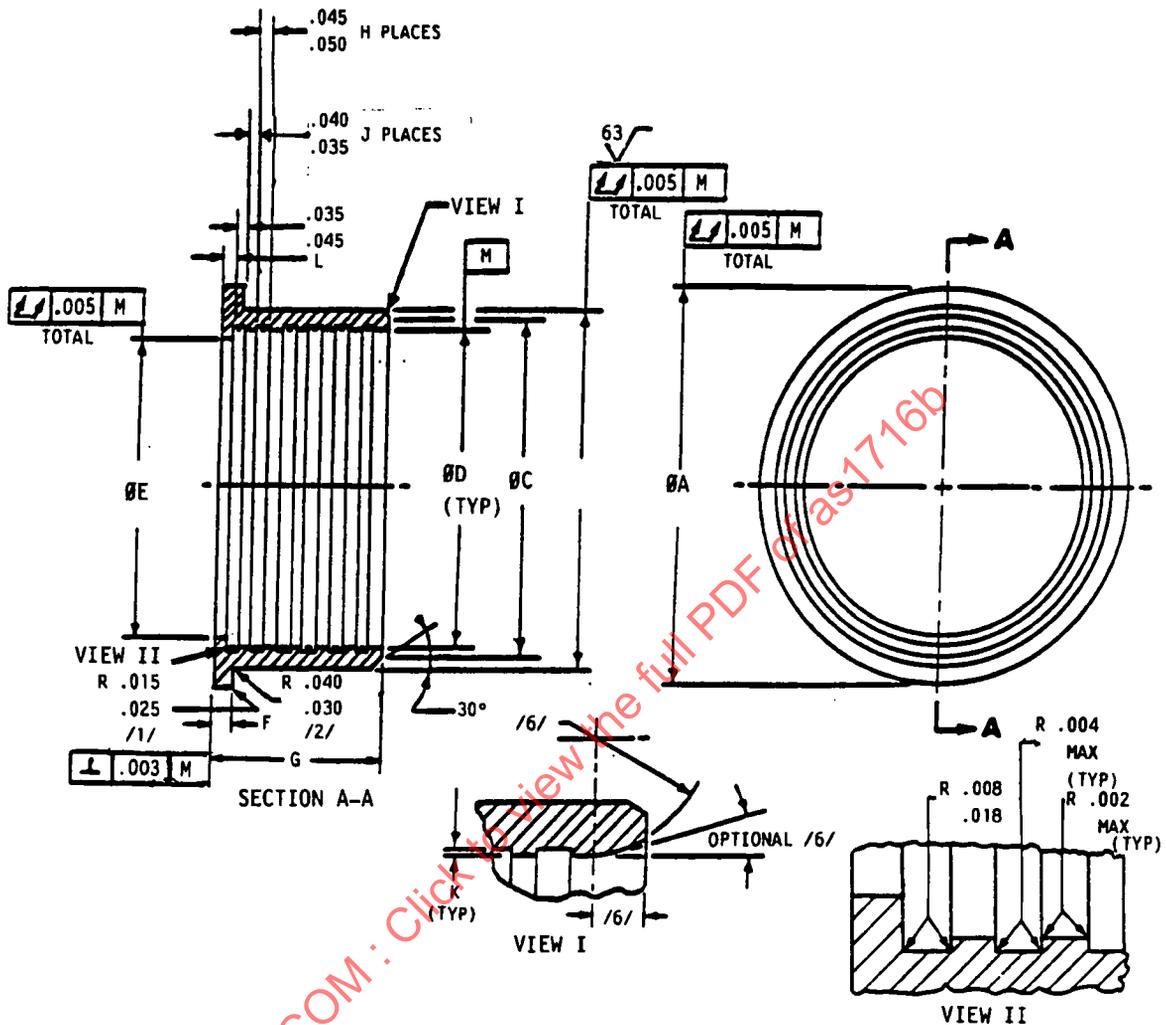


FIGURE 1

SAENORM.COM: Click to view the full PDF of as1716b

CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /2/ AS1710

**SAE** The Engineering Society  
For Advancing Mobility  
Land Sea Air and Space  
**INTERNATIONAL**

400 Commonwealth Drive, Warrendale, PA 15096-0001

**AEROSPACE STANDARD**

FERRULE, COUPLING, FLEXIBLE,  
VARIABLE CAVITY, THREADED,  
FERRULE TUBE END

**AS1716**

SHEET 1 OF 3

**REV.**

**B**

ISSUED 1982-05 REVISED 1992-07-15 (B)

TABLE 1 - FERRULE DIMENSIONS AND WEIGHTS

AS1716 DASH NO	TUBE O.D. (REF)	A /3/	B + .000/- .005	C	D /4/	E ± .005	F + .005/- .000	G	H PLCS	J PLCS	K /5/	WEIGHT MAX	
												L	LB
08	.500	.686	.625	.592	.504	.483	.035	.555	4	4	.010	.045/.035	.006
10	.625	.811	.750	.717	.630	.609	.035	.555	4	4	.010	.045/.035	.008
12	.750	.989	.891	.859	.755	.734	.040	.555	4	4	.010	.045/.035	.011
16	1.000	1.265	1.142	1.109	1.005	.984	.040	.579	4	4	.010	.045/.035	.014
20	1.250	1.515	1.392	1.359	1.256	1.235	.040	.579	4	4	.010	.045/.035	.017
24	1.500	1.785	1.642	1.600	1.506	1.480	.040	.685	5	5	.010	.045/.035	.024
28	1.750	2.035	1.892	1.850	1.756	1.730	.040	.685	5	5	.010	.045/.035	.029
32	2.000	2.308	2.145	2.100	2.006	1.980	.060	.685	5	5	.010	.045/.035	.035
36	2.250	2.558	2.395	2.350	2.257	2.220	.060	.692	5	5	.010	.045/.035	.039
40	2.500	2.808	2.645	2.600	2.507	2.465	.060	.692	5	5	.010	.065/.055	.042
44	2.750	3.058	2.895	2.850	2.757	2.715	.060	.692	5	5	.010	.065/.055	.049
48	3.000	3.308	3.145	3.100	3.007	2.965	.060	.692	5	5	.010	.065/.055	.052
56	3.500	3.820	3.645	3.600	3.509	3.467	.060	.722	5	5	.016	.065/.055	.063
64	4.000	4.329	4.154	4.110	4.009	3.975	.060	.722	5	5	.016	.065/.055	.069
72	4.500	4.830	4.655	4.610	4.509	4.475	.060	.770	6	6	.024	.090/.080	.090
80	5.000	5.330	5.155	5.110	5.009	4.975	.075	.966	8	8	.024	.090/.080	.114
88	5.500	5.830	5.655	5.610	5.511	5.475	.075	.966	8	8	.024	.090/.080	.124