

REV.  
C

AS1716

FEDERAL SUPPLY CLASS  
4730

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."  
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


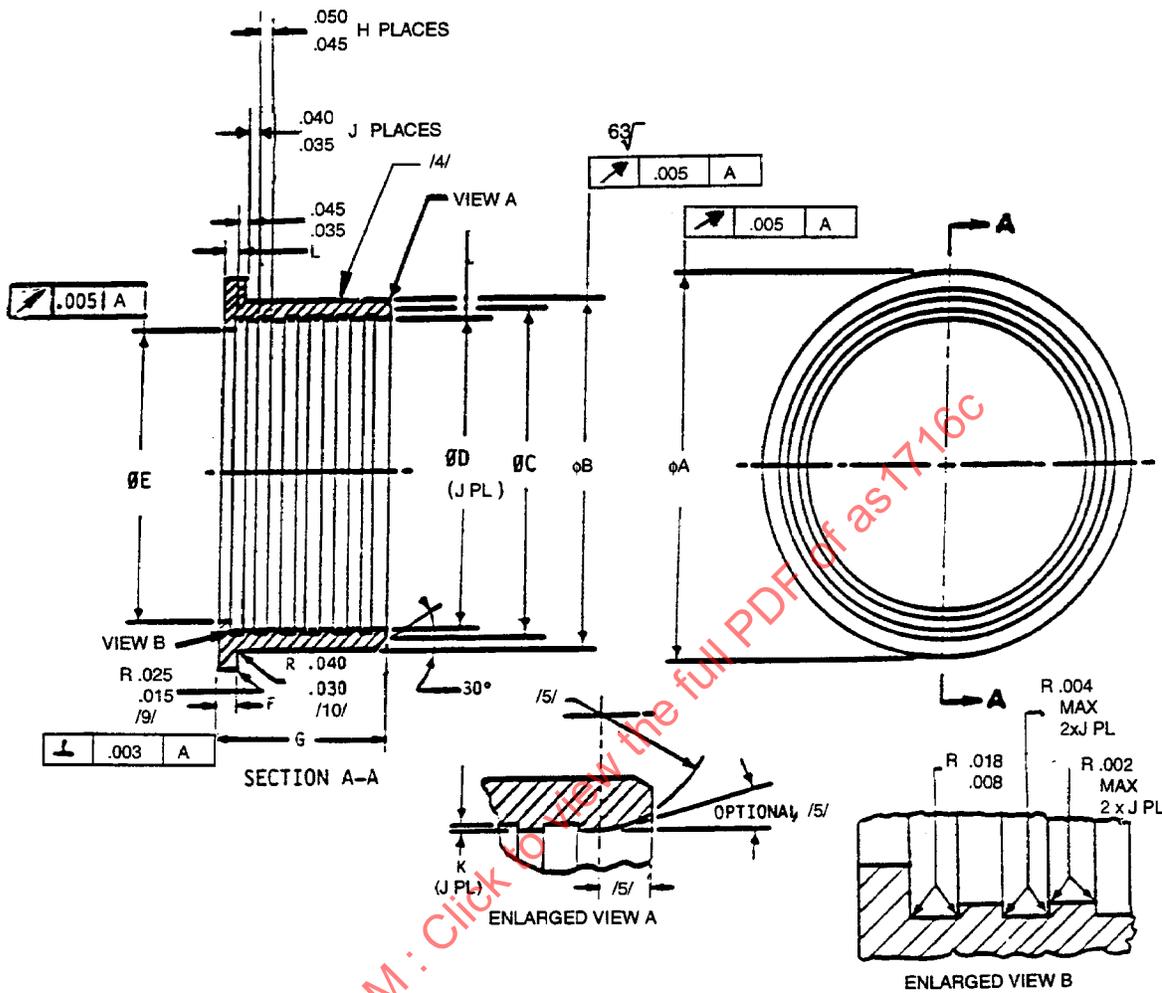


FIGURE 1 - FERRULE

SAENORM.COM : Click to view the full PDF of as1716c

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1710

**SAE** The Engineering Society  
For Advancing Mobility  
Land Sea Air and Space  
**INTERNATIONAL**  
400 Commonwealth Drive, Warrendale, PA 15096-0001

**AEROSPACE STANDARD**

FERRULE, COUPLING, FLEXIBLE, VARIABLE  
CAVITY, THREADED, FERRULE TUBE END

**AS1716**  
SHEET 1 OF 3

**REV.  
C**

ISSUED 1982-05 REVISED 1995-09 REAFFIRMED 2001-12

TABLE 1 - FERRULE DIMENSIONS AND WEIGHTS

BASIC NO.	(TUBE O.D.)	A /11/	B +.000/-0.005	C	D /12/	E ±.005	F +.005/-0.000	G	H PLCS	J PLCS	K /13/	L	LB/EA MAX
AS1716													
SIZE CODE													
08	.500	.686	.625	.592	.504	.483	.035	.555	4	4	.010	.045/.035	.006
10	.625	.811	.750	.717	.630	.609	.035	.555	4	4	.010	.045/.035	.008
12	.750	.989	.891	.859	.755	.734	.040	.555	4	4	.010	.045/.035	.011
16	1.000	1.265	1.142	1.109	1.005	.984	.040	.579	4	4	.010	.045/.035	.014
20	1.250	1.515	1.392	1.359	1.256	1.235	.040	.579	4	4	.010	.045/.035	.017
24	1.500	1.785	1.642	1.600	1.506	1.480	.040	.685	5	5	.010	.045/.035	.024
28	1.750	2.035	1.892	1.850	1.756	1.730	.040	.685	5	5	.010	.045/.035	.029
32	2.000	2.308	2.145	2.100	2.006	1.980	.060	.685	5	5	.010	.045/.035	.035
36	2.250	2.558	2.395	2.350	2.257	2.220	.060	.692	5	5	.010	.045/.035	.039
40	2.500	2.808	2.645	2.600	2.507	2.465	.060	.692	5	5	.010	.065/.055	.042
44	2.750	3.058	2.895	2.850	2.757	2.715	.060	.692	5	5	.010	.065/.055	.049
48	3.000	3.308	3.145	3.100	3.007	2.965	.060	.692	5	5	.010	.065/.055	.052
56	3.500	3.820	3.645	3.600	3.509	3.467	.060	.722	5	5	.016	.065/.055	.063
64	4.000	4.329	4.154	4.110	4.009	3.975	.060	.722	5	5	.016	.065/.055	.069
72	4.500	4.830	4.655	4.610	4.509	4.475	.060	.770	6	6	.024	.090/.080	.090
80	5.000	5.330	5.155	5.110	5.009	4.975	.075	.966	8	8	.024	.090/.080	.114
88	5.500	5.830	5.655	5.610	5.511	5.475	.075	.966	8	8	.024	.090/.080	.124