

REV.
C

AS1718

FEDERAL SUPPLY CLASS
4730

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


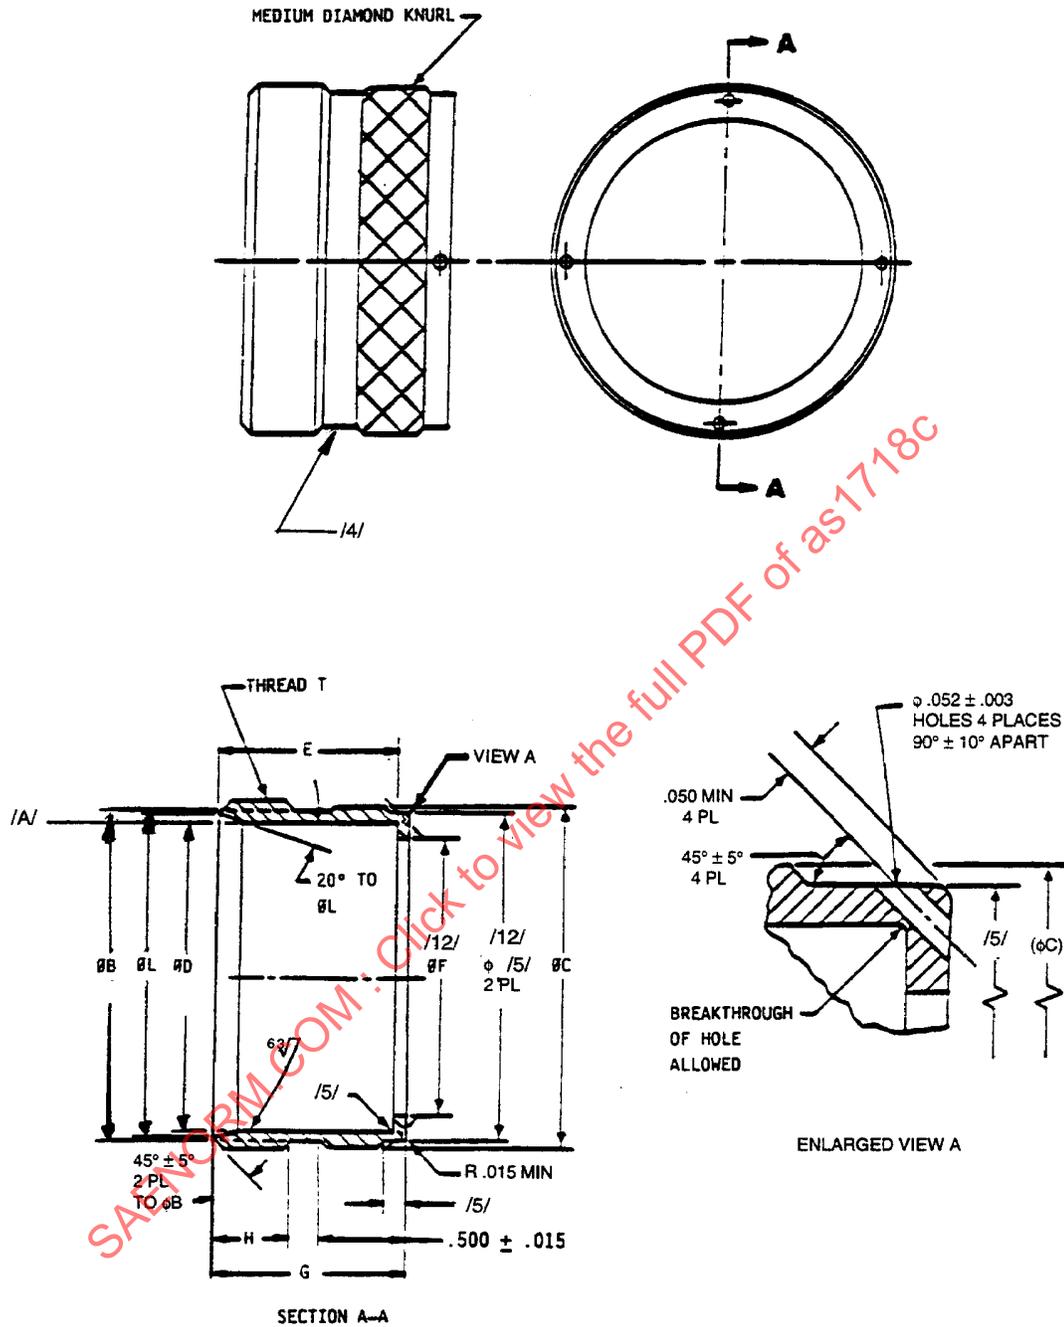


FIGURE 1 - BODY

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1710

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

COUPLING BODY, FLEXIBLE, VARIABLE CAVITY,
THREADED FERRULE TYPE TUBE ENDS

AS1718
SHEET 1 OF 3

**REV.
C**

ISSUED 1982-05 REVISED 1995-09 REAFFIRMED 2001-12

TABLE 1 - COUPLING BODY DIMENSIONS AND WEIGHTS

BASIC NO. AS1718 SIZE CODE	(TUBE SIZE)	THREAD PER FED-STD-H28/2	B		D /10/		E		F		G		H		L		LB/EA MAX
			/9/	KNURL MAX	+ .004/- .000	+ .010/- .000	+ .010/- .000	+ .010/- .000	+ .000/- .010	±.015	/11/	L					
08	.500	1.000-12 UNF-2A	.884	.919	.800	.790	.693	.875	.312	.837	.014						
10	.625	1.125-12 UNF-2A	1.009	1.044	.925	.790	.818	.875	.312	.962	.016						
12	.750	1.375-12 UNF-2A	1.259	1.254	1.135	.932	.998	1.017	.312	1.187	.023						
16	1.000	1.625-12 UN-2A	1.509	1.514	1.395	.992	1.274	1.078	.312	1.447	.029						
20	1.250	1.875-12 UN-2A	1.759	1.764	1.645	.992	1.524	1.078	.312	1.697	.034						
24	1.500	2.250-12 UN-2A	2.134	2.133	2.014	1.176	1.794	1.265	.375	2.066	.050						
28	1.750	2.500-12 UN-2A	2.384	2.383	2.264	1.176	2.044	1.265	.375	2.316	.056						
32	2.000	2.875-12 UN-2A	2.739	2.673	2.524	1.176	2.317	1.255	.500	2.586	.094						
36	2.250	3.125-12 UN-2A	2.993	2.923	2.774	1.176	2.567	1.255	.500	2.836	.104						
40	2.500	3.250-12 UN-2A	3.114	3.173	3.023	1.176	2.817	1.255	.500	3.086	.085						
44	2.750	3.500-12 UN-2A	3.364	3.424	3.274	1.176	3.067	1.255	.500	3.336	.098						
48	3.000	3.750-12 UN-2A	3.614	3.656	3.506	1.176	3.317	1.255	.500	3.569	.108						
56	3.500	4.250-12 UN-2A	4.114	4.156	4.006	1.248	3.829	1.360	.500	4.069	.131						
64	4.000	4.750-12 UN-2A	4.613	4.665	4.515	1.274	4.338	1.366	.500	4.578	.143						
72	4.500	5.500-12 UN-2A	5.363	5.282	5.132	1.432	4.839	1.524	.500	5.215	.234						
80	5.000	6.000-12 UN-2A	5.863	5.802	5.626	1.662	5.339	1.772	.500	5.710	.310						
88	5.500	6.375-12 UNS-2A	6.238	6.302	6.126	1.645	5.839	1.755	.500	6.190	.300						