



REV.  
E

AS1732

FEDERAL SUPPLY CLASS  
4730

RATIONALE

AS1732E HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

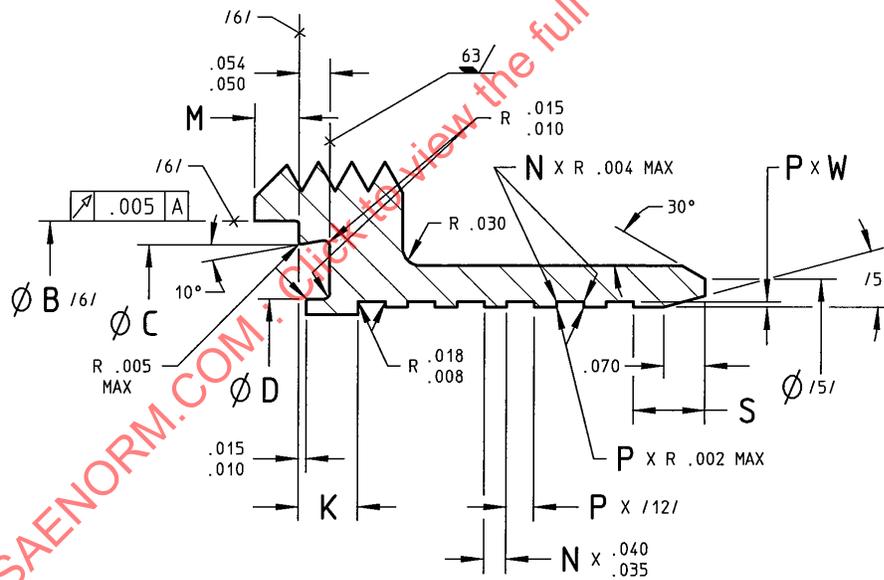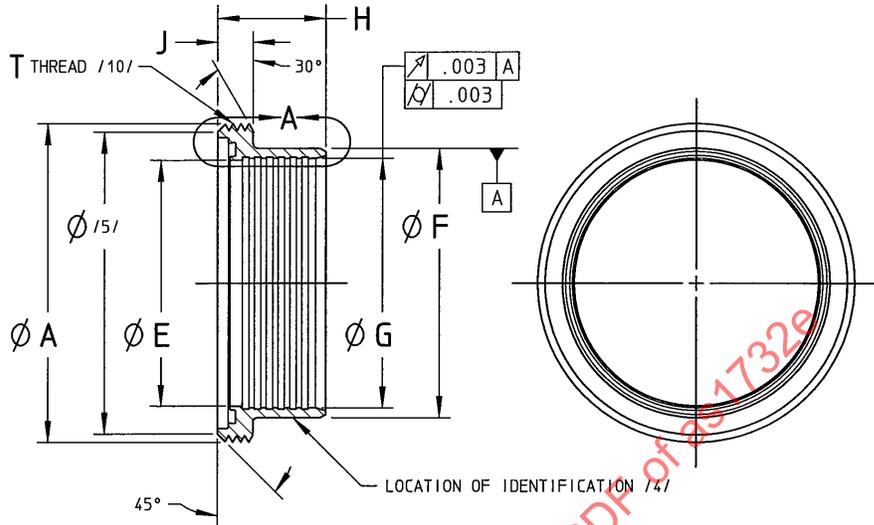


ENLARGED VIEW A

FIGURE 1 – BODY

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS1732E>

THIRD ANGLE PROJECTION

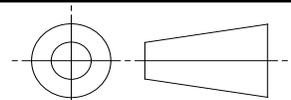

CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1730



AEROSPACE STANDARD

BODY, COUPLING, RIGID, FIXED CAVITY, THREADED, FERRULE TYPE TUBE ENDS, TYPE I

AS1732  
SHEET 1 OF 4

REV.  
E

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

TABLE 1 - COUPLING BODY DIMENSIONS

BASIC NO. AS1732 SIZE CODE /14/	(TUBE SIZE)	THREAD T PER FED-STD-H28/2 OR ASME B1.1 /10/ MOD	A	B	C	D	E	F	G	G TOL	H
			+0.005 -0.000	+0.005 -0.000	+0.010 -0.000	+0.000 -0.010	+0.005 -0.000	+0.005 -0.000			
04	.250	.687-12 UN-2A	.680	.529	.480	.298	.233	.375	.254	+0.005/-0.000	.645
05	.312	.750-12 UN-2A	.743	.580	.535	.353	.295	.437	.316	+0.005/-0.000	.645
06	.375	.812-12 UN-2A	.805	.635	.590	.408	.358	.500	.379	+0.005/-0.000	.645
08	.500	.937-12 UN-2A	.930	.762	.716	.534	.483	.625	.504	+0.005/-0.000	.645
10	.625	1.062-12 UN-2A	1.055	.900	.850	.668	.609	.750	.630	+0.005/-0.000	.675
12	.750	1.250-12 UNF-2A	1.243	1.033	.984	.802	.734	.890	.755	+0.005/-0.000	.675
16	1.000	1.500-12 UNF-2A	1.493	1.284	1.235	1.053	.984	1.142	1.005	+0.005/-0.000	.675
20	1.250	1.750-12 UN-2A	1.743	1.534	1.485	1.303	1.235	1.392	1.256	+0.005/-0.000	.675
24	1.500	2.000-12 UN-2A	1.993	1.783	1.735	1.553	1.480	1.642	1.506	+0.005/-0.000	.760
28	1.750	2.250-12 UN-2A	2.243	2.045	1.965	1.783	1.730	1.895	1.756	+0.005/-0.000	.760
32	2.000	2.500-12 UN-2A	2.493	2.292	2.235	2.053	1.981	2.145	2.006	+0.005/-0.000	.760
36	2.250	2.750-12 UN-2A	2.743	2.545	2.485	2.283	2.231	2.395	2.257	+0.005/-0.000	.760
40	2.500	3.000-12 UN-2A	2.993	2.800	2.713	2.531	2.481	2.645	2.507	+0.005/-0.000	.760
44	2.750	3.250-12 UN-2A	3.243	3.045	2.961	2.781	2.731	2.895	2.757	+0.005/-0.000	.760
48	3.000	3.625-12 UN-2A	3.618	3.395	3.340	3.158	2.979	3.145	3.007	+0.005/-0.000	.705
56	3.500	4.125-12 UN-2A	4.118	3.895	3.840	3.658	3.479	3.645	3.509	+0.005/-0.000	.705
64	4.000	4.625-12 UNS-2A /10/	4.603	4.395	4.340	4.158	3.979	4.155	4.009	+0.005/-0.000	.705
72	4.500	5.125-12 UNS-2A /10/	5.103	4.895	4.840	4.658	4.479	4.655	4.509	+0.006/-0.000	.884
80	5.000	5.625-12 UNS-2A /10/	5.602	5.378	5.325	5.143	4.979	5.155	5.009	+0.006/-0.000	.868

SAENORM.COM : Click to view the full PDF of as1732e

TABLE 2 - COUPLING BODY DIMENSIONS AND DESIGN INFORMATION

BASIC NO. AS1732 SIZE CODE /14/	J	K LENGTH	K TOL	M	N PLACES	P PLACES	S LENGTH	S TOL	W	O- RINGS DASH NO. /11/	ALUM WEIGHT LB/EA APPROX REF
04	.234	.090	+0.005/-0.000	.045	4	5	.127	+0.020/-0.010	.008-.010	012	.007
05	.234	.090	+0.005/-0.000	.045	4	5	.127	+0.020/-0.010	.008-.010	013	.008
06	.234	.090	+0.005/-0.000	.045	4	5	.127	+0.020/-0.010	.008-.010	014	.010
08	.234	.090	+0.005/-0.000	.045	4	5	.127	+0.020/-0.010	.008-.010	016	.013
10	.250	.100	±0.010	.045	4	5	.150	±0.015	.008-.010	018	.016
12	.250	.100	±0.010	.045	4	5	.150	±0.015	.008-.010	020	.021
16	.250	.100	±0.010	.045	4	5	.150	±0.015	.008-.010	024	.027
20	.250	.100	±0.010	.045	4	5	.150	±0.015	.008-.010	028	.033
24	.250	.100	±0.010	.045	5	6	.150	±0.015	.008-.010	030	.041
28	.250	.100	±0.010	.075	5	6	.125	+0.020/-0.010	.008-.010	032	.045
32	.250	.105	±0.010	.075	5	6	.125	+0.020/-0.010	.008-.010	034	.050
36	.279	.110	±0.010	.075	5	6	.125	+0.020/-0.010	.008-.010	036	.058
40	.279	.110	±0.010	.075	5	6	.125	+0.020/-0.010	.008-.010	038	.064
44	.279	.110	±0.010	.075	5	6	.125	+0.020/-0.010	.008-.010	040	.071
48	.309	.060	±0.010	.075	5	6	.125	+0.020/-0.010	.008-.010	042	.094
56	.309	.060	±0.010	.075	5	6	.125	+0.020/-0.010	.014-.016	044	.106
64	.309	.100	±0.010	.075	4	5	.142	±0.015	.014-.016	046	.120
72	.409	.100	±0.010	.075	6	7	.151	+0.020/-0.010	.020-.024	048	.178
80	.409	.100	±0.010	.075	6	7	.135	+0.020/-0.010	.020-.024	050	.196

SAENORM.COM : Click to view the full PDF of AS1732