
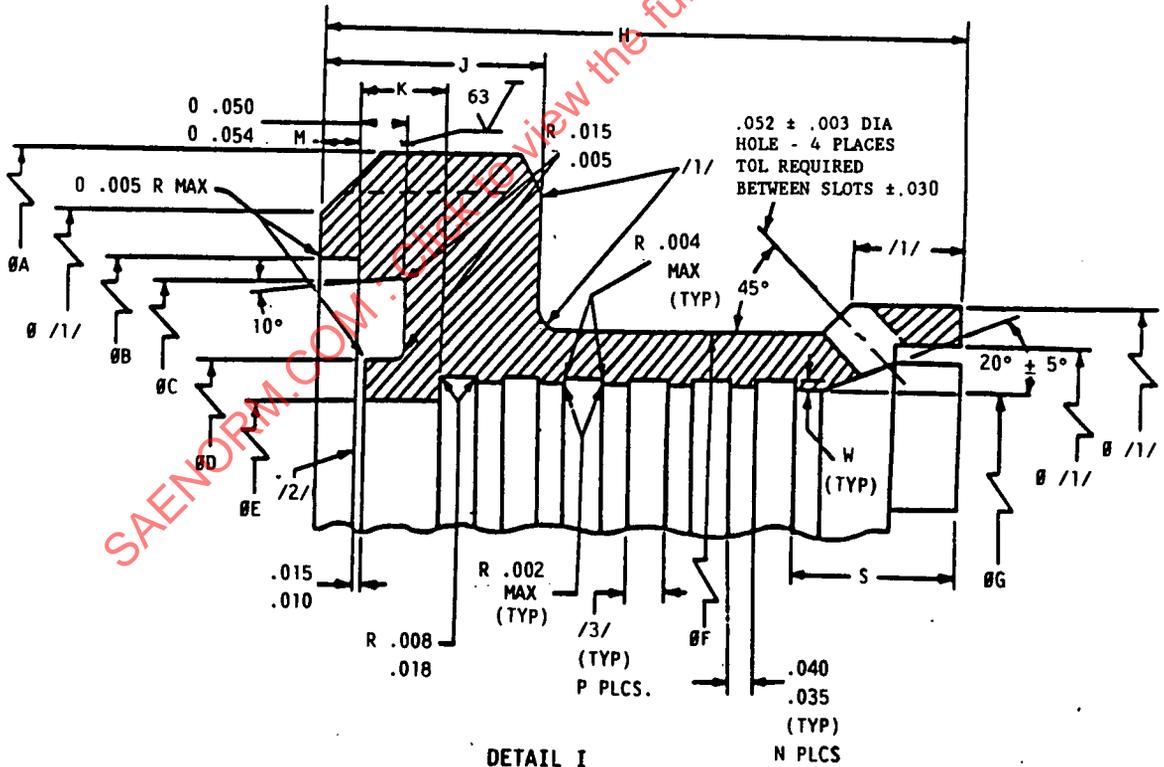


AS1733 REV. B

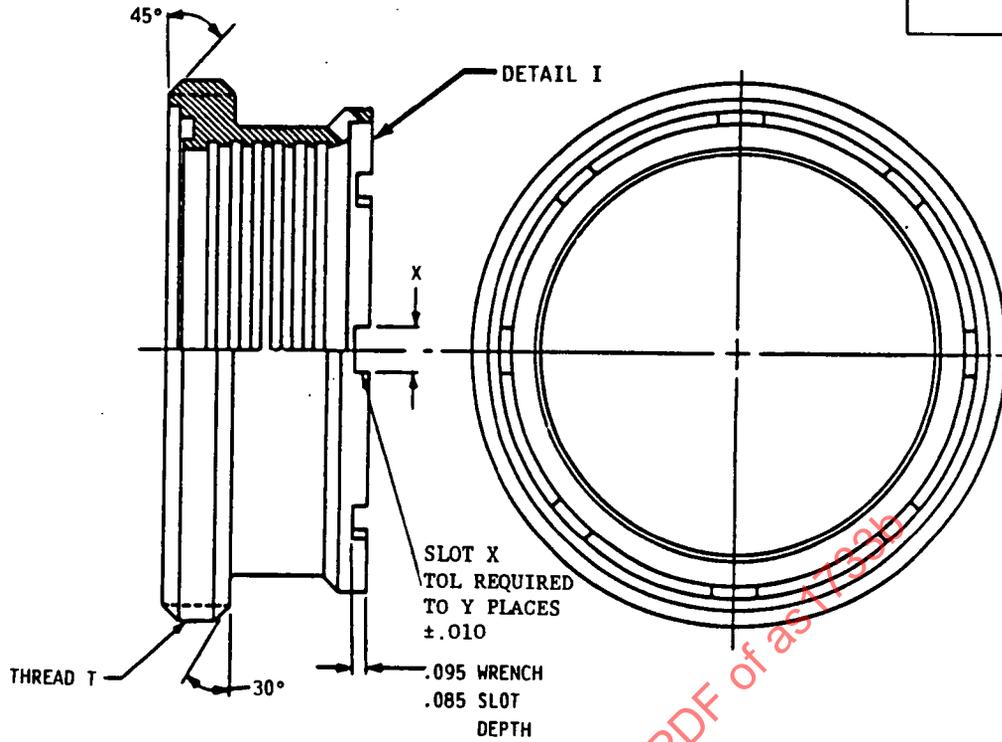

DETAIL I

FIGURE 1

CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: AS1730

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BODY, COUPLING, RIGID,
FIXED CAVITY, THREADED,
FERRULE TYPE TUBE ENDS, TYPE II

AS1733

SHEET 1 OF 4

REV.

B

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1984-01 REVISED 1991-10-30

TABLE 1 - BODY DIMENSIONS

AS1733 DASH NUMBER	TUBE SIZE (REF)	THREAD T PER H28/2	ϕA +.005/- .000	ϕB +.005/- .000	ϕC +.010/- .000	ϕD +.000/- .010	ϕE +.005/- .000	ϕF +.005/- .000	ϕG TOL	H
04	.250	.687-12 UN-2A	.680	.529	.480	.298	.228	.375	.254	+.005/- .000 .720
05	.312	.750-12 UN-2A	.743	.580	.535	.353	.290	.437	.316	+.005/- .000 .720
06	.375	.812-12 UN-2A	.805	.635	.590	.408	.353	.500	.379	+.005/- .000 .720
08	.500	.937-12 UN-2A	.930	.762	.716	.534	.479	.625	.504	+.005/- .000 .720
10	.625	1.062-12 UN-2A	1.055	.900	.850	.668	.604	.750	.630	+.005/- .000 .735
12	.750	1.250-12 UNF-2A	1.243	1.033	.984	.802	.729	.890	.755	+.005/- .000 .735
16	1.000	1.500-12 UNF-2A	1.493	1.284	1.235	1.053	.980	1.142	1.005	+.005/- .000 .735
20	1.250	1.750-12 UN-2A	1.743	1.534	1.485	1.303	1.230	1.392	1.256	+.005/- .000 .735
24	1.500	2.000-12 UN-2A	1.993	1.783	1.735	1.553	1.480	1.642	1.506	+.005/- .000 .825
28	1.750	2.250-12 UN-2A	2.243	2.045	1.965	1.783	1.730	1.895	1.756	+.005/- .000 .835
32	2.000	2.500-12 UN-2A	2.493	2.292	2.235	2.053	1.981	2.145	2.006	+.005/- .000 .835
36	2.250	2.750-12 UN-2A	2.743	2.545	2.485	2.283	2.231	2.395	2.257	+.005/- .000 .835
40	2.500	3.000-12 UN-2A	2.993	2.800	2.713	2.531	2.481	2.645	2.507	+.005/- .000 .835
44	2.750	3.250-12 UN-2A	3.243	3.045	2.961	2.781	2.731	2.895	2.757	+.005/- .000 .835
48	3.000	3.625-12 UN-2A	3.618	3.395	3.340	3.158	2.979	3.145	3.007	+.005/- .000 .785
56	3.500	4.125-12 UN-2A	4.118	3.895	3.840	3.658	3.479	3.645	3.509	+.005/- .000 .785
64	4.000	4.250-12 /4/	4.603	4.395	4.340	4.158	3.979	4.155	4.009	+.005/- .000 .770
72	4.500	5.125-12 /4/	5.103	4.895	4.840	4.658	4.479	4.655	4.509	+.006/- .000 .950
80	5.000	5.625-12 /4/	5.602	5.378	5.325	5.143	4.979	5.155	5.009	+.006/- .000 .950

TABLE 2 - BODY DIMENSIONS AND DESIGN INFORMATION

AS1733 OASH NUMBER	J	K LENGTH	K TOL	M	N PLACES LANO	P PLACES GROOVE	S +.020/- .010	W	X	Y PLACES	O-RINGS OASH NO (REF) /5/	WEIGHT MAX LB
04	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	012	.008
05	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	013	.009
06	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	014	.011
08	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	016	.014
10	.250	.100	±.010	.045	4	5	.225	.008/.010	.125	8	018	.017
12	.250	.100	±.010	.045	4	5	.225	.008/.010	.187	8	020	.022
16	.250	.100	±.010	.045	4	5	.225	.008/.010	.187	8	022	.025
20	.250	.100	±.010	.045	4	5	.225	.008/.010	.187	8	028	.033
24	.250	.100	±.010	.045	5	6	.225	.008/.010	.187	8	030	.041
28	.250	.100	±.010	.075	5	6	.205	.008/.010	.250	8	032	.046
32	.250	.105	±.010	.075	5	6	.205	.008/.010	.250	8	034	.052
36	.279	.110	±.010	.075	5	6	.205	.008/.010	.250	8	036	.060
40	.279	.110	±.010	.075	5	6	.205	.008/.010	.250	8	038	.067
44	.279	.110	±.010	.075	5	6	.205	.008/.010	.250	8	040	.092
48	.309	.060	±.010	.075	5	6	.205	.008/.010	.250	8	042	.092
56	.309	.060	±.010	.075	5	6	.205	.014/.016	.250	8	044	.105
64	.309	.100	±.010	.075	4	5	.230	.014/.016	.250	8	046	.118
72	.409	.100	±.010	.075	6	7	.260	.020/.024	.250	8	048	.196
80	.409	.100	±.010	.075	6	7	.260	.020/.024	.250	8	050	.229