



REV.  
E

AS1733

RATIONALE

AS1733E HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE invites your written comments and suggestions. SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled.

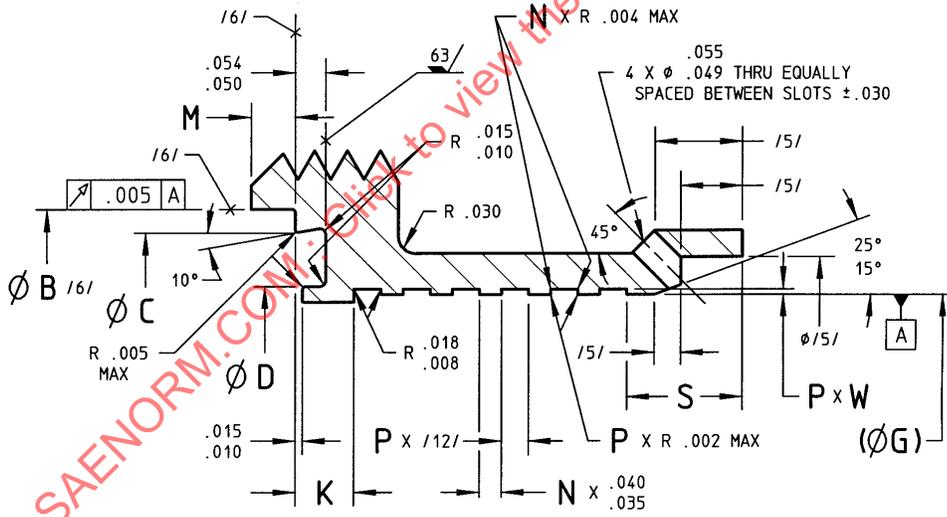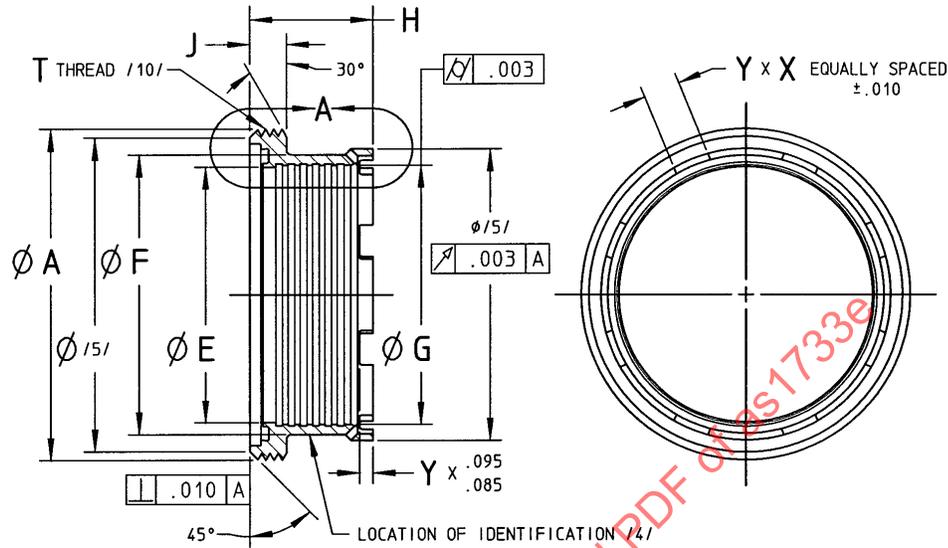


ENLARGED VIEW A

FIGURE 1 - BODY

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS1733E>

THIRD ANGLE PROJECTION

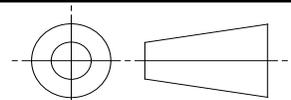

CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1730



AEROSPACE STANDARD

BODY, COUPLING, RIGID, FIXED CAVITY, THREADED, FERRULE TYPE TUBE ENDS, TYPE II

AS1733  
SHEET 1 OF 4

REV.  
E

TABLE 1 - BODY DIMENSIONS

BASIC NO. AS1733 SIZE CODE /14/	(TUBE SIZE)	THREAD T PER FED-STD-H28/2 OR ASME B1.1 /10/ MOD	A +.005 -.000	B +.005 -.000	C +.010 -.000	D +.000 -.010	E +.005 -.000	F +.005 -.000	G	G TOL	H
04	.250	.687-12 UN-2A	.680	.529	.480	.298	.233	.375	.254	+0.005/-0.000	.720
05	.312	.750-12 UN-2A	.743	.580	.535	.353	.295	.437	.316	+0.005/-0.000	.720
06	.375	.812-12 UN-2A	.805	.635	.590	.408	.358	.500	.379	+0.005/-0.000	.720
08	.500	.937-12 UN-2A	.930	.762	.716	.534	.483	.625	.504	+0.005/-0.000	.720
10	.625	1.062-12 UN-2A	1.055	.900	.850	.668	.609	.750	.630	+0.005/-0.000	.735
12	.750	1.250-12 UNF-2A	1.243	1.033	.984	.802	.734	.890	.755	+0.005/-0.000	.735
16	1.000	1.500-12 UNF-2A	1.493	1.284	1.235	1.053	.984	1.142	1.005	+0.005/-0.000	.735
20	1.250	1.750-12 UN-2A	1.743	1.534	1.485	1.303	1.235	1.392	1.256	+0.005/-0.000	.735
24	1.500	2.000-12 UN-2A	1.993	1.783	1.735	1.553	1.480	1.642	1.506	+0.005/-0.000	.825
28	1.750	2.250-12 UN-2A	2.243	2.045	1.965	1.783	1.730	1.895	1.756	+0.005/-0.000	.835
32	2.000	2.500-12 UN-2A	2.493	2.292	2.235	2.053	1.981	2.145	2.006	+0.005/-0.000	.835
36	2.250	2.750-12 UN-2A	2.743	2.545	2.485	2.283	2.231	2.395	2.257	+0.005/-0.000	.835
40	2.500	3.000-12 UN-2A	2.993	2.800	2.713	2.531	2.481	2.645	2.507	+0.005/-0.000	.835
44	2.750	3.250-12 UN-2A	3.243	3.045	2.961	2.781	2.731	2.895	2.757	+0.005/-0.000	.835
48	3.000	3.625-12 UN-2A	3.618	3.395	3.340	3.158	2.979	3.145	3.007	+0.005/-0.000	.785
56	3.500	4.125-12 UN-2A	4.118	3.895	3.840	3.658	3.479	3.645	3.509	+0.005/-0.000	.785
64	4.000	4.625-12 UNS-2A /10/	4.603	4.395	4.340	4.158	3.979	4.155	4.009	+0.005/-0.000	.770
72	4.500	5.125-12 UNS-2A /10/	5.103	4.895	4.840	4.658	4.479	4.655	4.509	+0.006/-0.000	.950
80	5.000	5.625-12 UNS-2A /10/	5.602	5.378	5.325	5.143	4.979	5.155	5.009	+0.006/-0.000	.950

SAENORM.COM : Click to view the full PDF of AS1733

	<b>AEROSPACE STANDARD</b>	<b>AS1733</b> SHEET 2 OF 4	<b>REV.</b> <b>E</b>
	BODY, COUPLING, RIGID, FIXED CAVITY, THREADED, FERRULE TYPE TUBE ENDS, TYPE II		

TABLE 2 - BODY DIMENSIONS AND DESIGN INFORMATION

BASIC NO. AS1733 SIZE CODE /14/	J	K LEN GTH	K TOL	M	N PLACES LAND	P PLACES GROOVE	S +.020 -.010	W	X	Y PLACES	O- RINGS DASH NO. /11/	ALUM WEIGHT LB/EA APPROX REF
04	.234	.090	+0.005/-0.000	.045	4	5	.210	.008-.010	.125	4	012	.008
05	.234	.090	+0.005/-0.000	.045	4	5	.210	.008-.010	.125	4	013	.009
06	.234	.090	+0.005/-0.000	.045	4	5	.210	.008-.010	.125	4	014	.011
08	.234	.090	+0.005/-0.000	.045	4	5	.210	.008-.010	.125	4	016	.014
10	.250	.100	±0.010	.045	4	5	.225	.008-.010	.125	8	018	.017
12	.250	.100	±0.010	.045	4	5	.225	.008-.010	.187	8	020	.022
16	.250	.100	±0.010	.045	4	5	.225	.008-.010	.187	8	024	.028
20	.250	.100	±0.010	.045	4	5	.225	.008-.010	.187	8	028	.033
24	.250	.100	±0.010	.045	5	6	.225	.008-.010	.187	8	030	.043
28	.250	.100	±0.010	.075	5	6	.205	.008-.010	.250	8	032	.048
32	.250	.105	±0.010	.075	5	6	.205	.008-.010	.250	8	034	.054
36	.279	.110	±0.010	.075	5	6	.205	.008-.010	.250	8	036	.063
40	.279	.110	±0.010	.075	5	6	.205	.008-.010	.250	8	038	.070
44	.279	.110	±0.010	.075	5	6	.205	.008-.010	.250	8	040	.077
48	.309	.060	±0.010	.075	5	6	.205	.008-.010	.250	8	042	.101
56	.309	.060	±0.010	.075	5	6	.205	.014-.016	.250	8	044	.114
64	.309	.100	±0.010	.075	4	5	.230	.014-.016	.250	8	046	.127
72	.409	.100	±0.010	.075	6	7	.260	.020-.024	.250	8	048	.186
80	.409	.100	±0.010	.075	6	7	.260	.020-.024	.250	8	050	.205

SAENORM.COM : Click to view the full PDF of AS1733E