
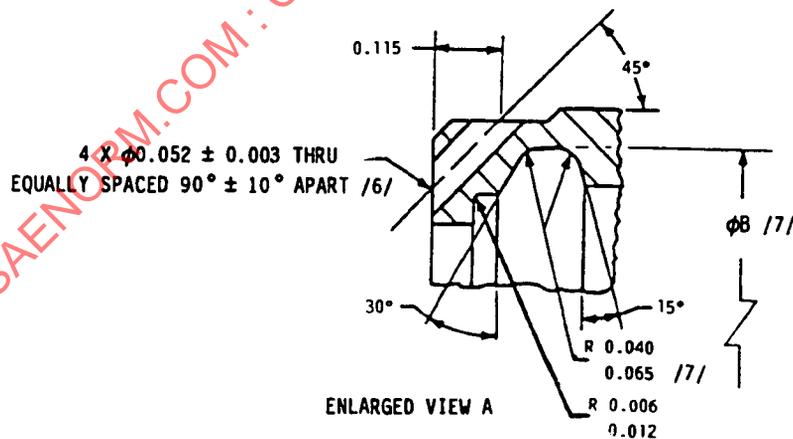


REV.
B

AS1734

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

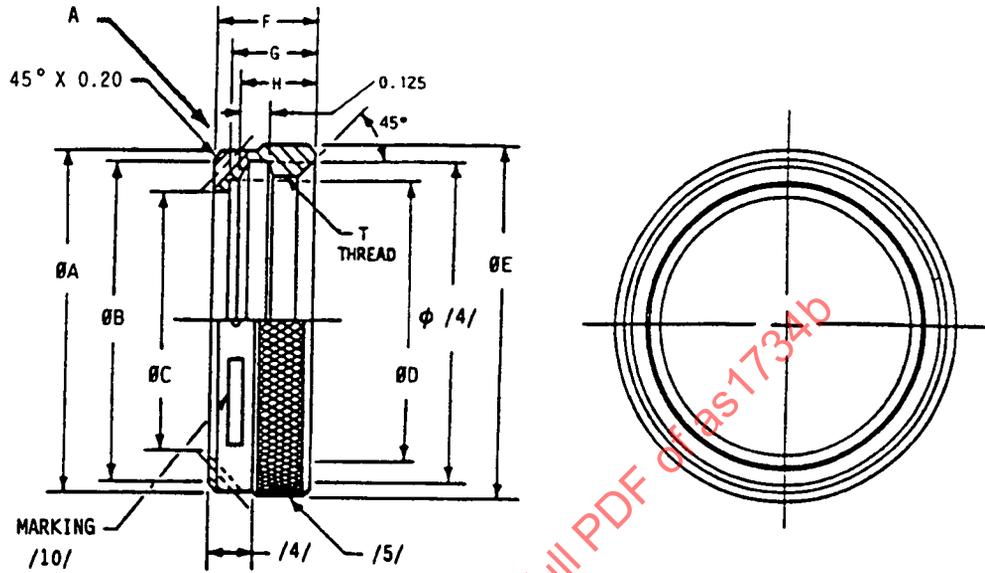

ENLARGED VIEW A

FIGURE 1 - NUT

CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ /11/ AS1730

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

NUT, COUPLING, RIGID,
FIXED CAVITY, THREADED,
FERRULE TYPE TUBE ENDS, TYPE I

AS1734

SHEET 1 OF 3

REV.

B

REVISED 1993-09-16 (B)

ISSUED 1984-01

TABLE 1 - NUT DIMENSIONS AND WEIGHTS

BASIC NO. AS1734 SIZE CODE	(TUBE SIZE)	THREAD T PER H28/2	A +.010/- .000	B +.010/- .000	C +.005/- .000	D DIA	D TOL	E MAX	F +.010/- .000	G +.010/- .000	H	WEIGHT MAX LB	
04	.250	.687-12 UN-2B	.787	.691	.529	.583	+.002/- .000	.829	.408	.338	.300	.300	.008
05	.312	.750-12 UN-2B	.850	.753	.580	.644	+.002/- .000	.892	.408	.338	.300	.300	.009
06	.375	.812-12 UN-2B	.912	.816	.635	.689	+.002/- .000	.954	.408	.338	.300	.300	.010
08	.500	.937-12 UN-2B	1.037	.941	.762	.815	+.003/- .000	1.079	.408	.338	.300	.300	.012
10	.625	1.062-12 UN-2B	1.172	1.066	.900	.960	+.003/- .000	1.214	.424	.354	.315	.315	.013
12	.750	1.250-12 UNF-2B	1.360	1.253	1.033	1.128	+.003/- .000	1.402	.424	.354	.315	.315	.015
16	1.000	1.500-12 UNF-2B	1.610	1.503	1.284	1.366	+.003/- .000	1.652	.424	.354	.315	.315	.017
20	1.250	1.750-12 UN-2B	1.860	1.753	1.534	1.628	+.003/- .000	1.902	.484	.414	.375	.375	.026
24	1.500	2.000-12 UN-2B	2.110	2.003	1.783	1.878	+.003/- .000	2.152	.499	.429	.375	.375	.028
28	1.750	2.250-12 UN-2B	2.360	2.253	2.045	2.138	+.003/- .000	2.402	.499	.429	.375	.375	.030
32	2.000	2.500-12 UN-2B	2.620	2.503	2.292	2.382	+.003/- .000	2.662	.499	.429	.375	.375	.035
36	2.250	2.750-12 UN-2B	2.870	2.753	2.549	2.638	+.003/- .000	2.912	.560	.455	.392	.392	.042
40	2.500	3.000-12 UN-2B	3.125	3.003	2.800	2.888	+.003/- .000	3.162	.560	.455	.392	.392	--
44	2.750	3.250-12 UN-2B	3.370	3.253	3.045	3.138	+.003/- .000	3.412	.560	.455	.392	.392	.060
48	3.000	3.625-12 UN-2B	3.751	3.628	3.395	3.513	+.004/- .000	3.793	.560	.455	.392	.392	.080
56	3.500	4.125-12 UN-2B	4.256	4.128	3.895	4.013	+.004/- .000	4.298	.560	.455	.392	.392	.090
64	4.000	4.625-12 UN-2B	4.756	4.613	4.395	4.513	+.004/- .000	4.798	.560	.455	.392	.392	.133
72	4.500	5.125-12 UN-2B	5.266	5.113	4.895	5.015	+.005/- .000	5.308	.678	.543	.475	.475	.186
80	5.000	5.625-12 UN-2B	5.765	5.613	5.378	5.500	+.005/- .000	5.807	.678	.543	.475	.475	.211