


ASI790

SAE Technical Board rules provide that: "All technical reports, including standards approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report in formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against infringement of patents."

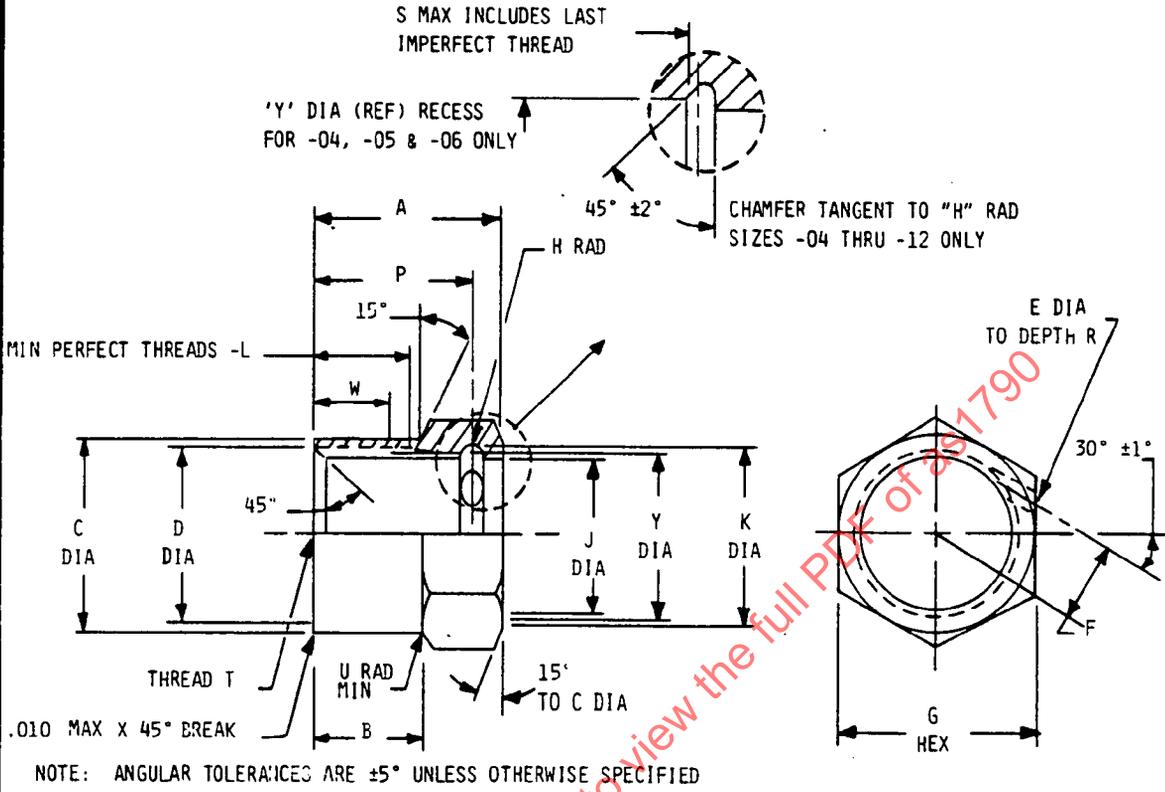

TUBE SIZE	** T THREAD PER MIL-S-8879	A ±.010	B ±.010	C ±.010 -.000	D +.020 -.000	E ±.005	F ±.005	G HEX	H RAD ±.001
-04	.4375-20UNJF-3B	.615	.311	.519	.446	.077	.194	.562	.038
-05	.5000-20UNJF-3B	.687	.311	.582	.509	.086	.224	.625	.043
-06	.5625-18UNJF-3B	.718	.311	.644	.571	.086	.252	.688	.043
-08	.7500-16UNJF-3B	.843	.343	.837	.759	.101	.341	.875	.050
-10	.8750-14UNJF-3B	.968	.343	.963	.884	.101	.396	1.000	.050
-12	1.0625-12UNJ-3B	1.015	.375	1.172	1.072	.131	.485	1.250	.065
-16	1.3125-12UNJ-3B	1.125	.375	1.422	1.322	.131	.610	1.500	±.016 .065
* -20	1.6250-12UNJ-3B	1.168	.390	1.735	1.635	.131	.766	1.812	±.020 .065

TUBE SIZE	J DIA	K ±.005	L MIN	P ±.004	R ±.015	S MAX	U RAD MIN	W ±.015	Y ±.015
-04	.3888-.3970	.461	.404	.500	.235	.500	.060	.328	.415
-05	.4513-.4591	.531	.402	.550	.255	.542	.060	.344	.477
-06	.5084-.5166	.588	.414	.573	.265	.569	.060	.344	.534
-08	.6892-.6977	.781	.488	.660	.325	.647	.060		
-10	.8055-.8152	.896	.544	.762	.365	.727	.070		
-12	.9814-.9914	1.102	.550	.780	.465	.763	.085		
-16	1.2314-1.2414	1.352	.563	.875	.535	.813	.115		
* -20	1.5439-1.5539	1.664	.589	.959	.735	.813	.115		

- * NOTE: -20 SIZE SUITABLE TO 1500 PSI MAX
- ** NOTE: GAGE AFTER "DRY LUBE" WHEN APPLICABLE

PREPARED BY SAE SUBCOMMITTEE G-3B, AEROSPACE FITTINGS



AEROSPACE STANDARD
NUT - SWIVEL
WIRED ON, LIGHTWEIGHT

ASI790

Issued March 1983 Revised