


AS 1790

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its application, and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user. SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions."

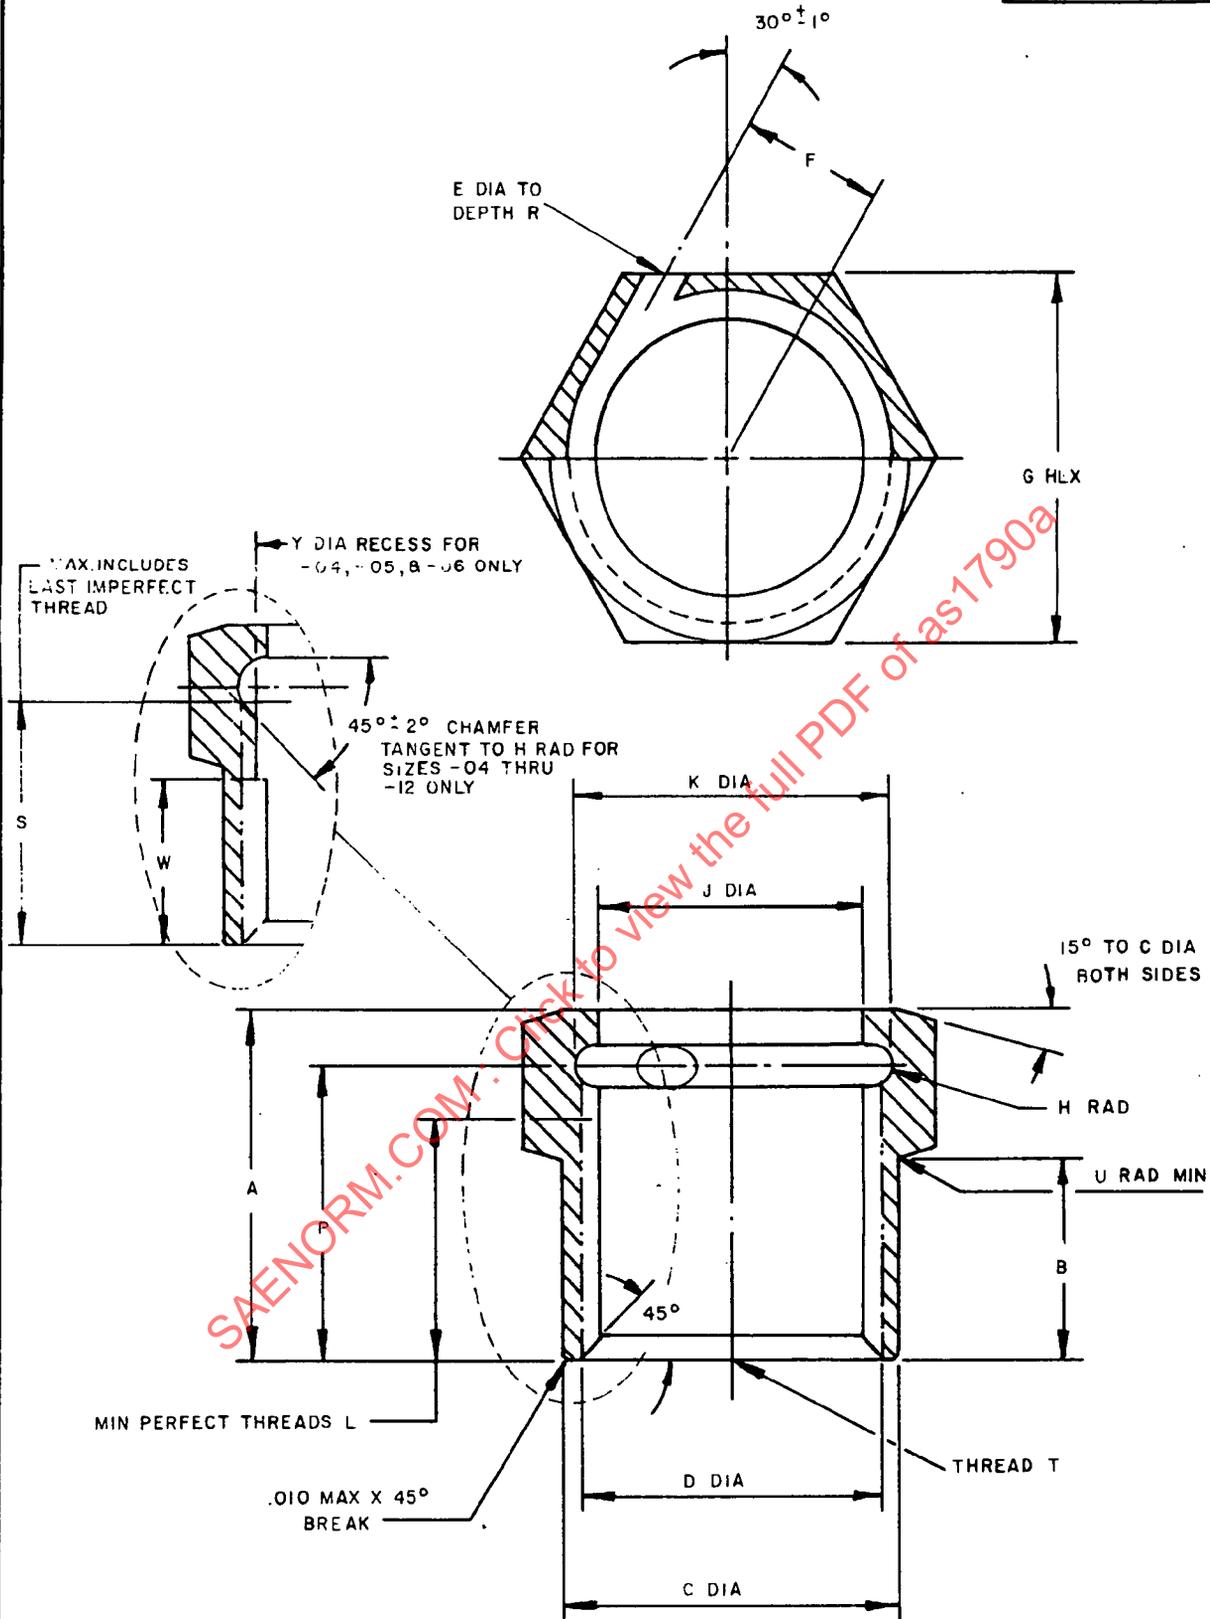

ISSUED MARCH 1983 REVISED MAY 1984

PREPARED BY SAE SUBCOMMITTEE G-3B, AEROSPACE FITTINGS, OF SAE COMMITTEE G-3, AEROSPACE FITTINGS, HOSE AND TUBING ASSEMBLIES

SAE The Engineering Resource For Advancing Mobility

400 Commonwealth Drive
Warrendale, PA 15096

AEROSPACE STANDARD

**NUT - SWIVEL
WIRED ON, LIGHTWEIGHT**

AS 1790

SHEET 1 OF 3

AS 1790

NOTE: Angular tolerances are $\pm 5^\circ$ unless otherwise specified.

TUBE SIZE	* T THREAD PER MIL-S-8879	A $\pm .010$	B $\pm .010$	C $+ .010$ $- .000$	D $+ .020$ $- .000$	E $\pm .005$	F $\pm .005$	G HEX		H RAD $\pm .001$
-04	.4375-20UNJF-3B	.615	.304	.519	.446	.077	.194	.562	+ .005 - .010	.038
-05	.5000-20UNJF-3B	.687	.376	.582	.509	.086	.224	.625		.043
-06	.5625-18UNJF-3B	.718	.407	.644	.571	.086	.252	.688		.043
-08	.7500-16UNJF-3B	.843	.500	.837	.759	.101	.341	.875		.050
-10	.8750-14UNJF-3B	.968	.625	.963	.884	.101	.396	1.000		.050
-12	1.0625-12UNJ -3B	1.015	.640	1.172	1.072	.131	.485	1.250		.065
-16	1.3125-12UNJ -3B	1.125	.750	1.422	1.322	.131	.610	1.500		$\pm .016$
-20	1.6250-12UNJ -3B	1.168	.778	1.735	1.635	.131	.766	1.812	$\pm .020$	

TUBE SIZE	J DIAMETER	K $\pm .005$	L MIN	P $\pm .004$	R $\pm .015$	S MAX	U RAD MIN	W $\pm .015$	Y $\pm .015$
-04	.3888/ .3970	.461	.404	.500	.235	.500	.060	.328	.415
-05	.4513/ .4591	.531	.402	.550	.255	.542	.060	.344	.477
-06	.5084/ .5166	.588	.414	.573	.265	.569	.060	.344	.534
-08	.6892/ .5977	.781	.488	.660	.325	.647	.060		
-10	.8055/ .8152	.896	.544	.762	.365	.727	.070		
-12	.9814/ .9914	1.102	.550	.780	.465	.763	.085		
-16	1.2314/1.2414	1.352	.563	.875	.535	.813	.115		
-20	1.5439/1.5539	1.664	.589	.959	.735	.813	.115		

* NOTE: Thread gage must fit after application of "dry lube" when applicable.

ISSUED MARCH 1983 REVISED (A) MAY 1984

PREPARED BY SAE SUBCOMMITTEE G-3B, AEROSPACE FITTINGS, OF SAE COMMITTEE G-3, AEROSPACE FITTINGS, HOSE AND TUBING ASSEMBLIES

AEROSPACE STANDARD

NUT - SWIVEL
WIRED ON, LIGHTWEIGHT

AS 1790

SHEET 2 OF 3