


REV. D

AS1790

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

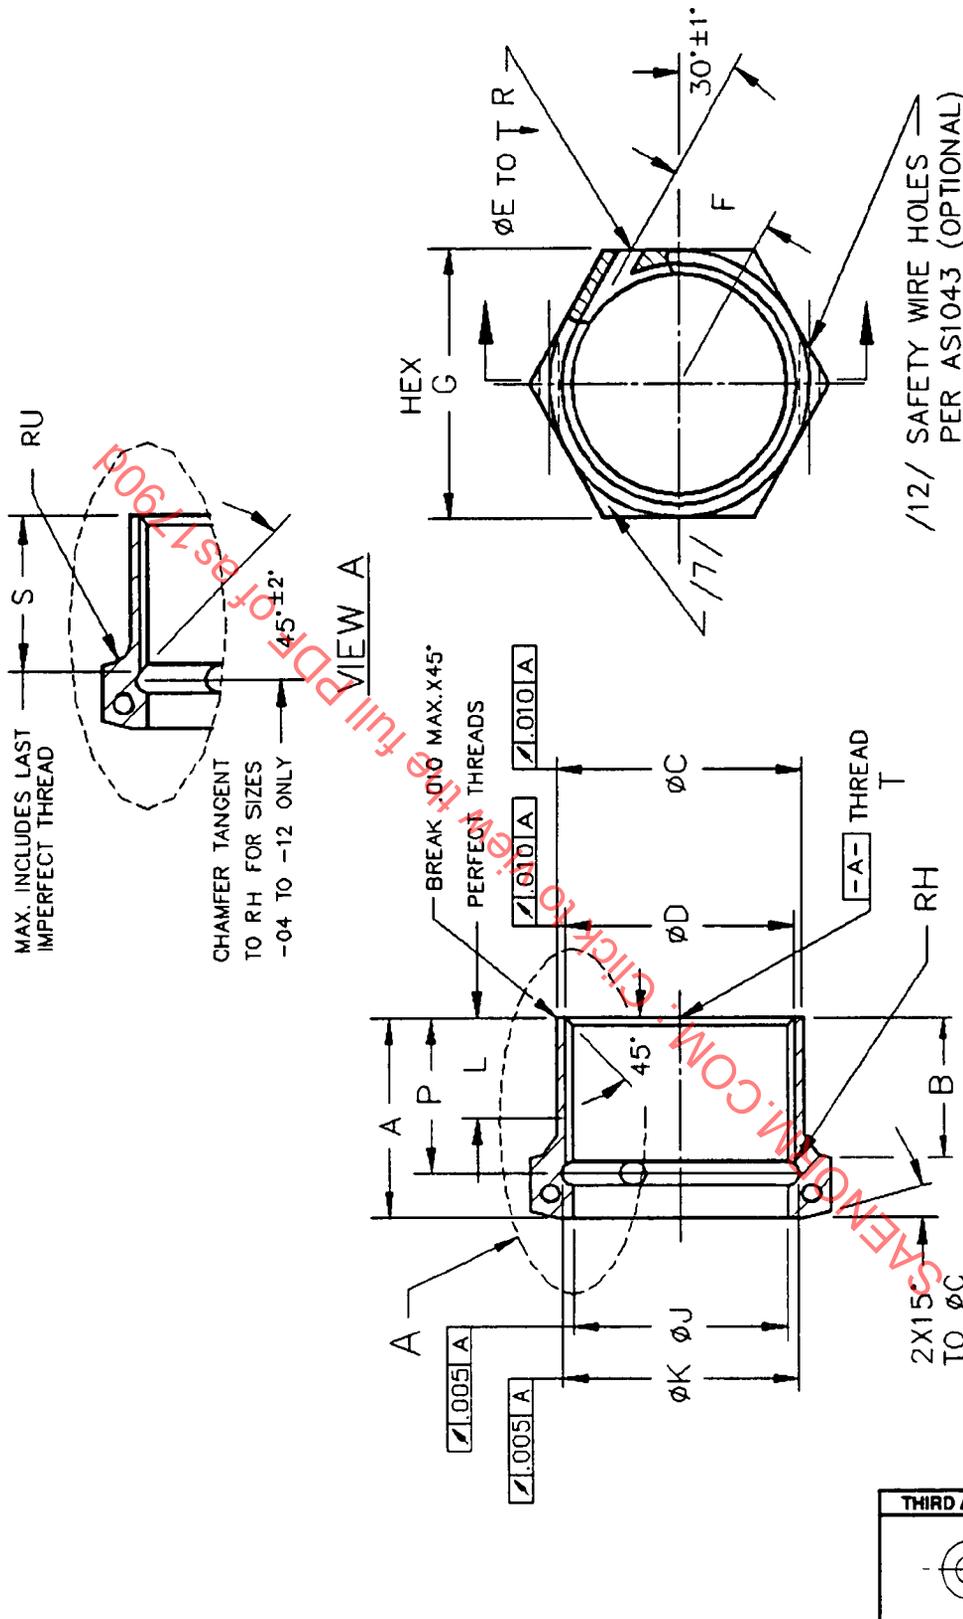

/12/ SAFETY WIRE HOLES PER AS1043 (OPTIONAL)


FIGURE 1 - NUT, RETAINED, LIGHT WEIGHT

REVISED 1993-08-04 (D)

ISSUED 1983-03

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MIL-F-18280



AEROSPACE STANDARD

NUT, RETAINED, LIGHT WEIGHT

AS1790

SHEET 1 OF 3

REV. D

REV.
D

AS1790

TABLE 1 - DIMENSIONS A-H

BASIC NO. AS1790 /12/ SIZE CODE	NOMINAL TUBE SIZE	T THREAD PER MIL-S-8879	A		B		D		E	F	G	H ±.010
			±.010	±.010	C	±.010						
02	.125	.3125-24UNJF-38	.530	.334	.370	.331	.077	.137	.370-.380	.038		
03	.188	.3750-24UNJF-38	.580	.320	.432	.394	.077	.170	.433-.443	.038		
04	.250	.4375-20UNJF-38	.615	.304	.524	.456	.077	.194	.552-.567	.038		
05	.312	.5000-20UNJF-38	.687	.376	.587	.519	.086	.224	.615-.630	.043		
06	.375	.5625-18UNJF-38	.718	.407	.649	.581	.086	.252	.678-.693	.043		
08	.500	.7500-16UNJF-38	.843	.500	.842	.769	.101	.341	.865-.880	.050		
10	.625	.8750-14UNJF-38	.968	.625	.968	.894	.101	.396	.990-1.005	.050		
12	.750	1.0625-12UNJ -38	1.015	.640	1.177	1.082	.131	.485	1.240-1.255	.065		
14	.875	1.1875-12UNJ -38	1.100	.725	1.302	1.208	.131	.548	1.365-1.380	.065		
16	1.000	1.3125-12UNJ -38	1.125	.750	1.427	1.332	.131	.610	1.484-1.516	.065		
20	1.250	1.6250-12UNJ -38	1.168	.778	1.740	1.645	.131	.766	1.792-1.832	.065		
24	1.500	1.8750-12UNJ -38	1.358	.920	2.055	1.895	.131	.893	2.105-2.145	.065		
32	2.000	2.5000-12UNJ -38	1.684	1.184	2.678	2.520	.131	1.200	2.730-2.770	.065		

TABLE 2 - DIMENSIONS J-U AND WEIGHTS

BASIC NO. AS1790 /12/ SIZE CODE	J		L	P	R	U	LB/EA	LB/EA	LB/EA	
	MIN	±.004	±.015	S	MIN	CRES	MAX	MAX	MAX	
02	.2708-.2791	.350	.300	.430	.155	.382	.060	.007	.004	.003
03	.3338-.3420	.415	.330	.450	.170	.371	.060	.011	.007	.004
04	.3888-.3970	.461	.404	.500	.235	.500	.060	.016	.009	.006
05	.4513-.4591	.531	.402	.550	.255	.542	.060	.020	.012	.007
06	.5084-.5166	.588	.414	.573	.265	.569	.060	.025	.014	.009
08	.6892-.6977	.781	.488	.660	.325	.647	.060	.041	.024	.014
10	.8055-.8152	.896	.544	.762	.365	.727	.070	.056	.033	.019
12	.9814-.9914	1.102	.550	.780	.465	.763	.085	.093	.054	.032
14	1.1079-1.1179	1.231	.557	.850	.500	.790	.085	.117	.068	.041
16	1.2314-1.2414	1.352	.563	.875	.535	.813	.115	.135	.078	.047
20	1.5439-1.5539	1.664	.589	.959	.735	.813	.115	.183	.106	.064
24	1.7939-1.8039	1.917	.661	1.105	.842	.911	.115	.339	.196	.118
32	2.4189-2.4289	2.542	.844	1.340	1.026	1.094	.115	.590	.341	.205