

Issued	1984-12
Revised	2006-03
Stabilized	2012-01
Superseding AS1852C	

Nozzles and Ports – Gravity Fueling
Interface Standards for Civil Aircraft

RATIONALE

This document has been determined to contain basic and stable technology which is not dynamic in nature.

STABILIZED NOTICE

This document has been declared “Stabilized” by the AE-5 Technical Committee and will no longer be subjected to periodic reviews for currency. Users are responsible for verifying references and continued suitability of technical requirements. Newer technology may exist.

SAENORM.COM : Click to view the full PDF of as1852d

SAE Technical Standards Board Rules provide that: “This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user.”

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

Copyright © 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

SAE values your input. To provide feedback on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1852D>

RATIONALE

A new turbine fuel service port is required on SAE Aerospace Standard AS1852 to prevent misfueling of civil aircraft powered by new diesel engines, and turbine aircraft that require the exclusive use of turbine fuels for safe operation.

1. SCOPE:

This SAE Aerospace Standard (AS) defines the maximum allowable free opening dimensions for airframe fueling ports on civil aircraft that require the exclusive use of gasoline as an engine fuel, and the minimum free opening dimensions for airframe fueling ports on civil aircraft that operate with turbine fuels as the primary fuel type and with gasoline as the emergency fuel type. This SAE Aerospace Standard (AS) also defines the features and dimensions for airframe refueling ports on civil aircraft that require the exclusive use of turbine fuel as an engine fuel.

In addition, this document defines the minimum fuel nozzle spout dimensions for turbine fuel ground service equipment, and the maximum fuel nozzle spout diameter for gasoline ground service equipment.

1.1 Purpose:

This document establishes the essential interface dimensions for airframe fueling ports and ground fueling nozzle spouts that are intended for use on civil aircraft with gravity fuel servicing provisions.

Primary intent of the standardized interface limits and features detailed in this document is the prevention of misfueling civil aircraft that require the exclusive use of a single aviation fuel type for safe operation.

2. REFERENCES:

There are no referenced publications specified herein.

3. GENERAL STANDARDS:

3.1 Airframe Fueling Ports:

The following airframe fuel port dimensions represent standard limits. Use of ports with other dimensions that fall within prescribed limits are considered in compliance with the guidelines of this document.

TABLE 1 - Airframe Fueling Ports

Type of Fuel	Standardized Limitations	Fueling Port - Free Opening	
		Metric Units (mm)	English Units (inch)
Gasolines	Maximum Opening Diameter	60	2.36
Turbine and Gasoline Fuels	Minimum Opening Diameter	75	2.95
Turbine Fuels	Refer to Figure 1 for Features and Dimensions ¹		
¹ Turbine fuel ports must adopt an elongated or elliptical opening, fence and door(s) provisions within dimensional limits in full compliance with details of Figure 1.			

3.2 Ground Fueling Nozzle Spouts:

The following ground fueling nozzle spout dimensions represent standard limits. Use of nozzle spouts with dimensions that fall within the prescribed limits are considered to be in compliance with the guidelines of this document.

TABLE 2 - Ground Fueling Nozzle Spouts

Type of Service	Standardized Limitations	Fueling Nozzle Spout Dimensions	
		Metric Units (mm)	English Units (inch)
Gasolines	Maximum Nozzle Spout Diameter	50	1.97
Turbine Fuels	Minimum Nozzle Spout Length ¹	67.6	2.66
Turbine Fuels	Maximum Nozzle Spout Width ¹	29.7	1.17
¹ Turbine fuel nozzle spouts must adopt an elongated or elliptical cross section with maximum and minimum axes within dimensional limits noted above and in full compliance with the details of Figure 2.			

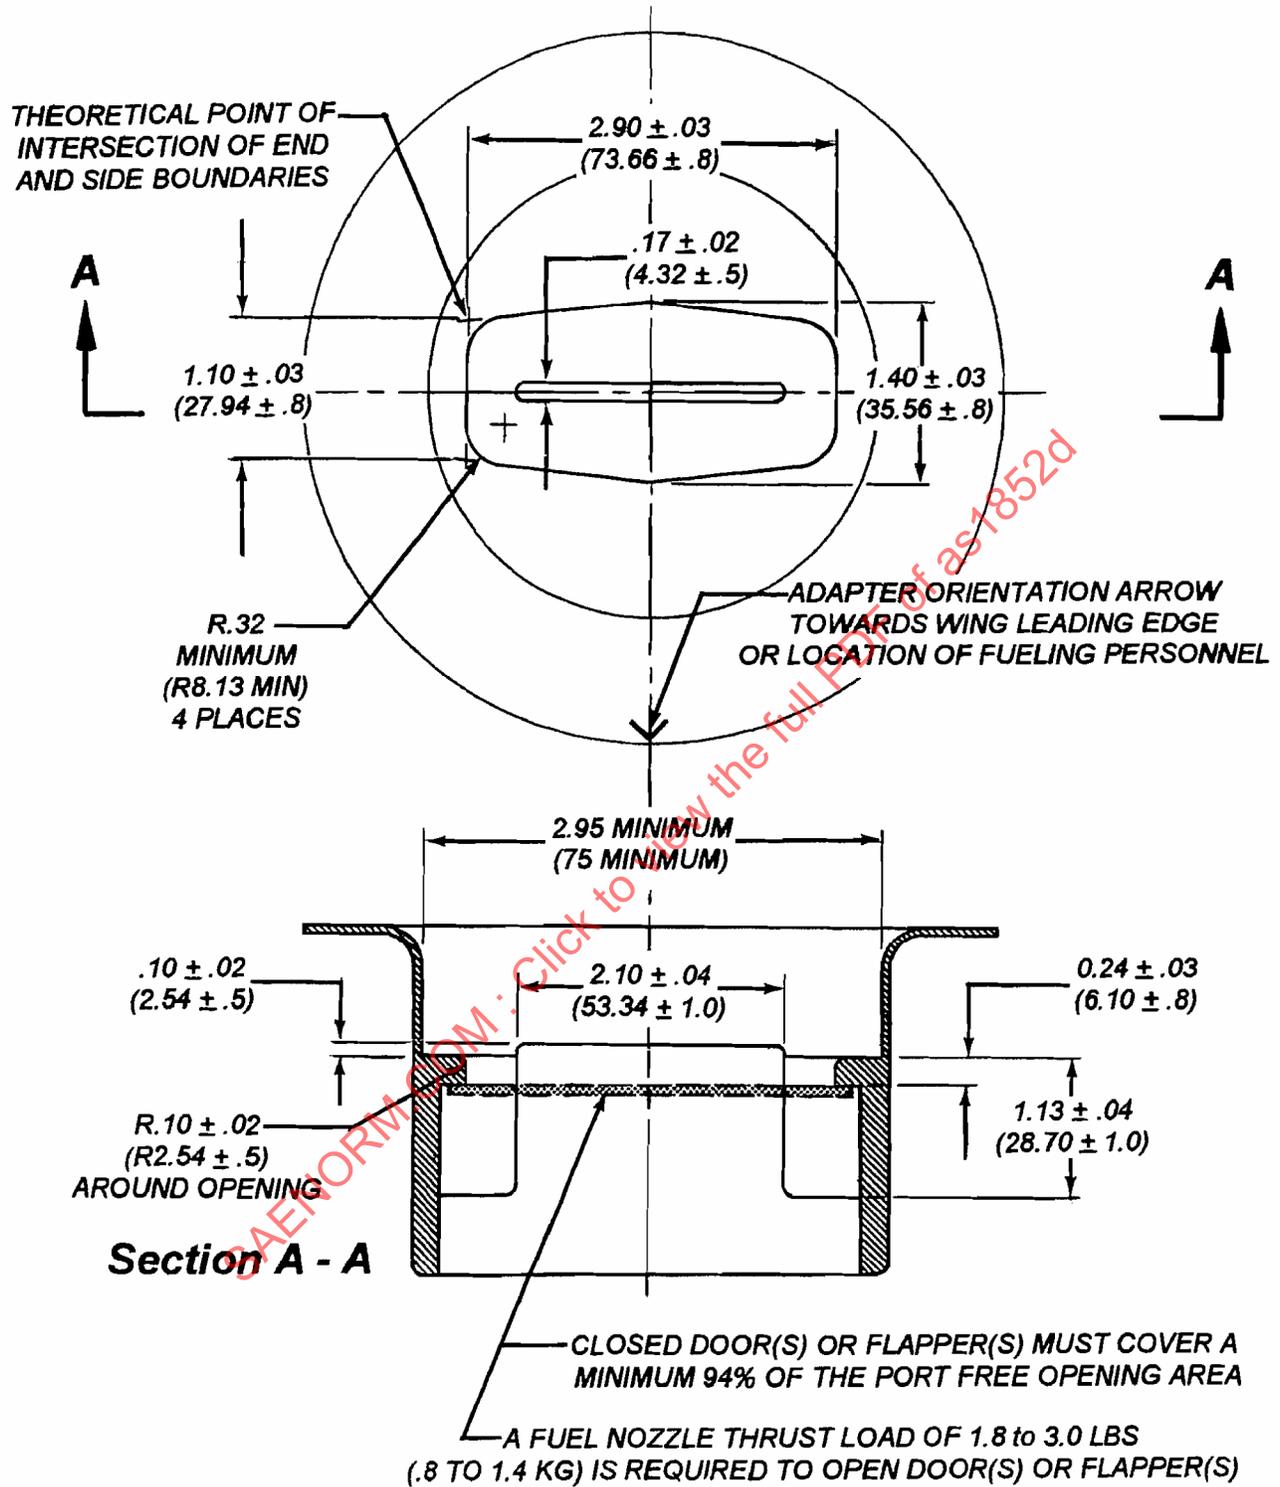


FIGURE 1 - Turbine Fuel Service Port