

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A
AS1868™

FEDERAL SUPPLY CLASS
4720

RATIONALE


THIS TECHNICAL REPORT IS BEING STABILIZED BECAUSE IT COVERS TECHNOLOGY, PRODUCTS, OR PROCESSES WHICH ARE MATURE AND NOT LIKELY TO CHANGE IN THE FORESEEABLE FUTURE.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as1868a

For more information on this standard, visit
<https://www.sae.org/standards/content/AS1868A/>

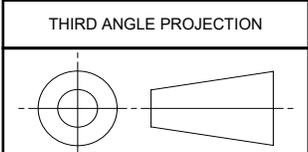

CUSTODIAN: G-3/G-3D		PROCUREMENT SPECIFICATION: MIL-H-8795	
	AEROSPACE STANDARD		AS1868™
	HOSE ASSEMBLY, RUBBER, FLARELESS, FIELD ATTACHABLE FITTING, 90° TO 90°		

ISSUED 1987-04 REAFFIRMED 2013-01 STABILIZED 2024-09

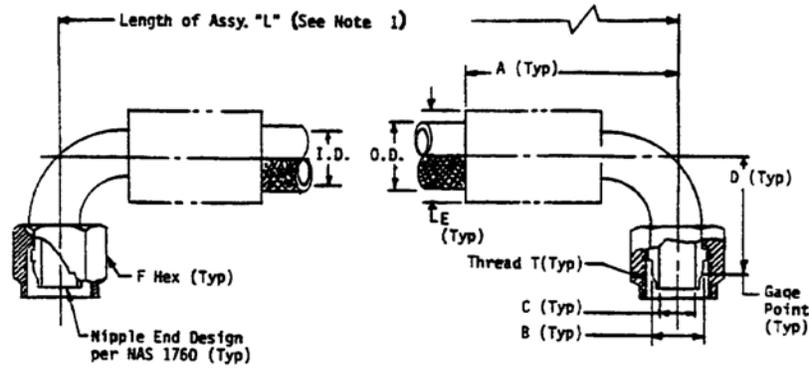


FIGURE 1

TABLE 1

HOSE SIZE DASH NUMBER	HOSE ASSEMBLY SIZE REF.	THREAD T PER MIL-S-8879 REF.	HOSE I.D. MIN.	HOSE O.D. MAX.	A MAX.	B GAGE DIA. BASIC	E /1/ MAX.	F HEX REF.
-03	.125	.3750-24 UNJF-3B	.125	.476		.2340	.627	.50
-04	.188	.4375-20 UNJF-3B	.188	.539	1.86	.2930	.690	.56
-05	.250	.5000-20 UNJF-3B	.250	.601	2.08	.3500	.752	.62
-06	.313	.5625-18 UNJF-3B	.313	.695	2.24	.4120	.877	.69
-08	.406	.7500-16 UNJF-3B	.406	.789	2.66	.5600	1.016	.88
-10	.500	.8750-14 UNJF-3B	.500	.945	2.94	.6730	1.235	1.00
-12	.625	1.0625-12 UNJ-3B	.625	1.101	3.86	.8100	1.360	1.25
-16	.875	1.3125-12 UNJ-3B	.875	1.265	3.67	1.0620	1.546	1.50
-20	1.125	1.6250-12 UNJ-3B	1.125	1.531	3.88	1.3160	1.921	1.81
-24	1.375	1.8750-12 UNJ-3B	1.375	1.781		1.5650	2.124	2.12

TABLE 2

SIZE CODE	D		C MIN. DIA. THRU
	MIN.	MAX.	
-03			.073
-04	.73	.85	.123
-05	.88	1.00	.170
-06	.99	1.11	.232
-08	1.03	1.15	.350
-10	1.25	1.37	.450
-12	1.89	2.01	.575
-16	2.18	2.30	.781
-20	2.22	2.34	1.015
-24			1.250

TABLE 3

HOSE ASSEMBLY LENGTH	AVAILABLE INCREMENTS	TOLERANCE
UNDER 18 INCHES	(NOT LESS THAN) .125 INCH	(PLUS OR MINUS) .125 INCH
18 TO 36 INCHES	(NOT LESS THAN) .250 INCH	(PLUS OR MINUS) .250 INCH
36 TO 50 INCHES	(NOT LESS THAN) .500 INCH	(PLUS OR MINUS) .500 INCH
OVER 50 INCHES	(NOT LESS THAN) 1.000 INCH	(PLUS OR MINUS) 1 PERCENT