


SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**AS1895™/1**  
**REV. G**

FEDERAL SUPPLY CLASS  
5340

RATIONALE


QPL DATE REQUIREMENT EXTENDED UNTIL JULY 2022. QUALIFICATION CONTINGENCY NOTE ADDED TO SECOND PARAGRAPH OF NOTE 3.

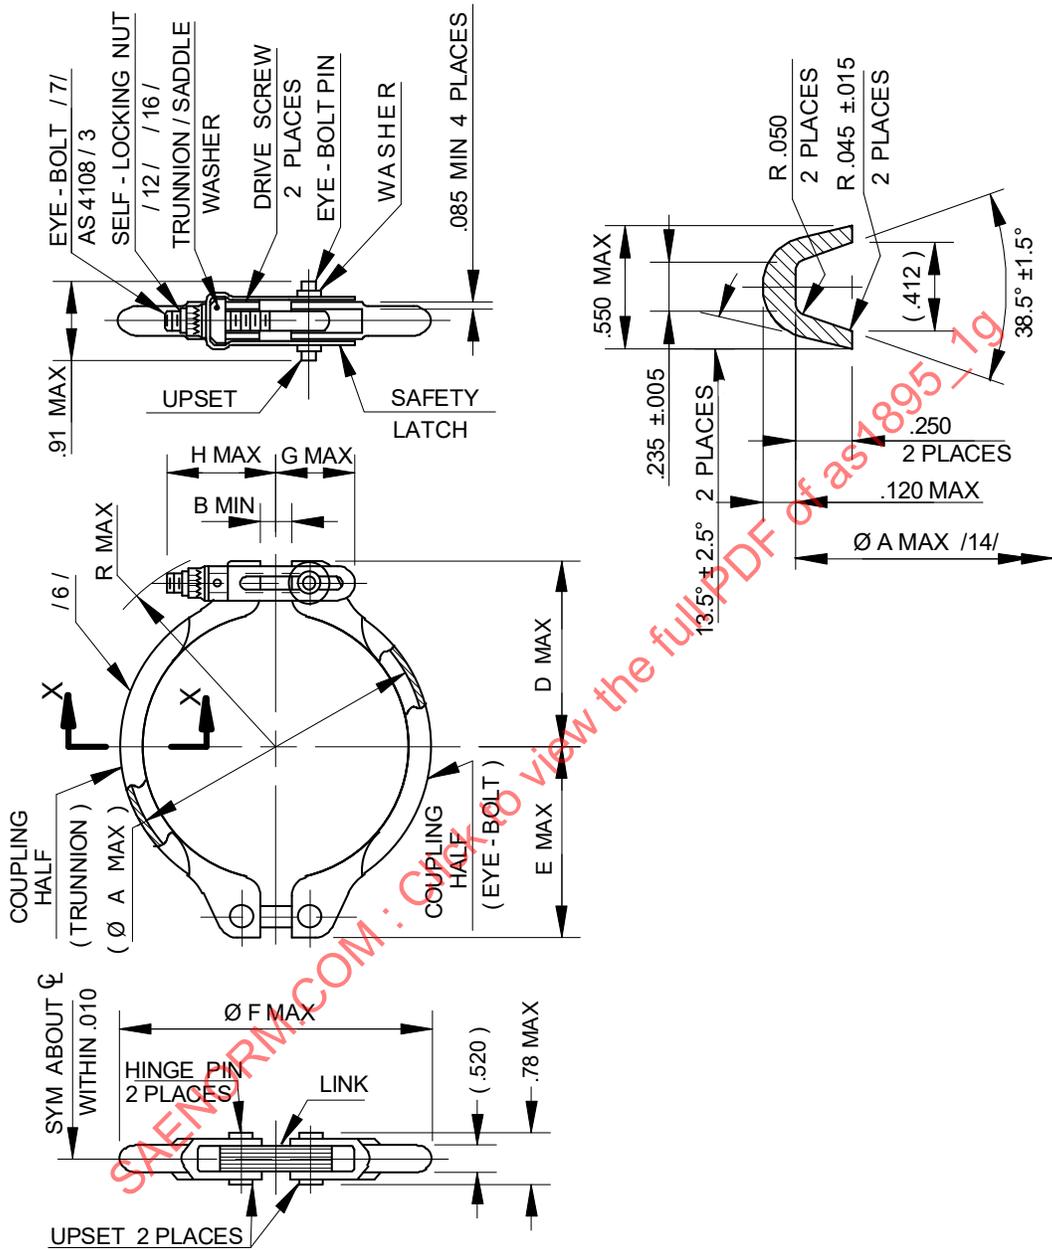

**ENLARGED SECTION X-X**

FIGURE 1 - STANDARD PROFILE COUPLING

For more information on this standard, visit <https://www.sae.org/standards/content/AS1895/1G/>

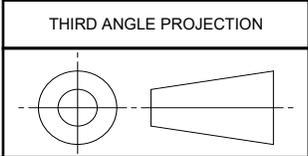

CUSTODIAN: G-3/G-3A		PROCUREMENT SPECIFICATION: AS1895 /3/	
	<b>AEROSPACE STANDARD</b>		<b>AS1895™/1</b> SHEET 1 OF 5
	COUPLING, V-RETAINER, SINGLE LATCH, TYPE I STANDARD PROFILE		

ISSUED 1985-12 REAFFIRMED 2013-01 REVISED 2021-06

**TABLE 1 - DIMENSIONS AND WEIGHTS**

BASIC NUMBER AS1895/1 SIZE CODE /1/ /2/ /17/	(TUBE SIZE)	A	B	D	E	F	G	H	R	LB/EA MAX
150	1.50	2.385	.100	1.843	1.780	2.656	.968	1.410	2.126	.40
175	1.75	2.635	.150	1.880	1.857	2.906	.875	1.425	2.250	.41
200	2.00	2.885	.175	2.093	2.030	3.156	.898	1.450	2.360	.42
225	2.25	3.135	.175	2.130	2.107	3.406	.898	1.450	2.485	.44
250	2.50	3.385	.190	2.343	2.280	3.656	.925	1.475	2.569	.46
275	2.75	3.635	.190	2.468	2.410	3.906	.984	1.525	2.700	.49
300	3.00	3.885	.190	2.593	2.530	4.156	1.000	1.550	2.824	.51
325	3.25	4.135	.190	2.630	2.607	4.406	1.024	1.575	2.950	.54
350	3.50	4.385	.190	2.755	2.780	4.656	1.059	1.550	3.058	.57
400	4.00	4.885	.250	3.015	2.972	5.156	1.024	1.575	3.263	.63
450	4.50	5.385	.250	3.265	3.222	5.656	1.109	1.600	3.519	.67
500	5.00	5.885	.300	3.520	3.467	6.156	1.074	1.625	3.732	.72
550	5.50	6.385	.300	3.765	3.722	6.656	1.149	1.650	3.970	.77
600	6.00	6.885	.400	4.015	3.972	7.156	1.400	1.675	4.208	.81
650	6.50	7.385	.400	4.265	4.222	7.656	1.400	1.675	4.468	.86
700	7.00	7.885	.450	4.515	4.477	8.156	1.400	1.675	4.724	.93
750	7.50	8.385	.450	4.765	4.732	8.656	1.400	1.800	4.973	.98

SAENORM.COM : Click to view the full PDF of as1895-19

NOTES:

/1/

**TABLE 2 - COUPLING COMPONENT MATERIAL**

PART	MATL	TYPE	SPEC	REMARKS
COUPLING HALVES	CRES	A286	AMS5525 AMS5732	SOLUTION PRECIPITATION HEAT TREATED. /2/
	NICKEL ALLOY	718	AMS5596 AMS5662	
TRUNNION/ SADDLE WASHER	CRES	A286	AMS5731 AMS5732 AMS5734 AMS5737	SOLUTION AND PRECIPITATION HEAT TREATED OR EQUIVALENT MATERIAL PROPERTIES ACHIEVED BY COLD WORK.
	NICKEL ALLOY	713	AMS5377	INVESTMENT CASTING
EYEBOLT	CRES	A286	AMS5731 AMS5732 AMS5737	/2/ AND /7/
SAFETY LATCH	NICKEL ALLOY	718	AMS5596	SOLUTIONS AND PRECIPITATION HEAT TREATED.
SELF-LOCKING NUT	CRES	A286	AMS5731 AMS5732	/2/ AND /7/
EYEBOLT PIN	CRES	A286	AMS5731 AMS5732	SOLUTION AND PRECIPITATION HEAT TREATED.
WASHER	CRES	303 OR 304	AMS5640 AMS5513	
LINK	CRES	A286	AMS5731 AMS5732 AMS5525	SOLUTION HEAT TREATED OR SOLUTION AND PRECIPITATION HEAT TREATED.
HINGE PIN	CRES	A286	AMS5731 AMS5732 AMS5734 AMS5737	SOLUTION AND PRECIPITATION HEAT TREATED.
DRIVE SCREW	CRES CRES CRES NICKEL ALLOY	302HQ 305 A286 718		

/2/ FINISH:

- a. SELF-LOCKING NUT: BLANK = SILVER PLATED OR L = DRY FILM LUBED.
- b. COUPLING HALVES:
  - CRES A286 COUPLING HALVES: PASSIVATE PER AMS2700 TYPES 1, 2, 3, OR 8, MECHANICAL POLISH OR ELECTRO-POLISH TO REMOVE IRON PARTICLES. INSIDE SURFACE OF COUPLING HALVES SHALL BE COATED WITH SOLID DRY FILM LUBRICANT PER AS1895.
  - NICKEL ALLOY 718 COUPLING HALVES: NO FINISH REQUIRED. INSIDE SURFACE OF COUPLING HALVES SHALL BE COATED WITH SOLID DRY FILM LUBRICANT PER AS1895. NOTE: THE OUTSIDES OF 718 COUPLING FLANKS SHALL HAVE LAY LINE MARKINGS WITH "-1000F-" (REFER TO AS1895).
- c. EYEBOLT: LUBRICATE WITH ANTI-SEIZING COMPOUND. MAY USE "HEAVY DUTY ANTI-SEIZE" COMPOUND #LB 8009 FROM LOCTITE® (CAGE CODE 05972) OR EQUIVALENT.

	<b>AEROSPACE STANDARD</b>	<b>AS1895™/1</b> SHEET 3 OF 5	<b>REV.</b> <b>G</b>
	COUPLING, V-RETAINER, SINGLE LATCH, TYPE I STANDARD PROFILE		

/3/ QUALIFICATION:

PARTS SHALL BE QUALIFIED IN A COMPLETE COUPLING ASSEMBLY IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS1895. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST PRI-QPL-AS1895 FOR THIS STANDARD. SEE [www.eAuditNet.com](http://www.eAuditNet.com) FOR CURRENT QPL ONLINE.

THIS QPL REQUIREMENT SHALL BE IN EFFECT FOR PURCHASE ORDERS PLACED ON OR AFTER JULY 31, 2022. SUPPLIERS SEEKING LISTING ON THE INITIAL QPL MUST APPLY TO PRI FOR APPROVAL NO LATER THAN DECEMBER 31, 2021. UNTIL THE QPL IS IN EFFECT, USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVALS. LEGACY OR INVENTORIED HARDWARE MANUFACTURED PRIOR TO QPL REQUIRED DATE: JULY 31, 2022, MAY BE USED UNTIL DEPLETION VIA ACCEPTANCE BY OEM OR USER SUPPLEMENT ACCEPTANCE SHEETS. TRANSITION TO PRI-QPL SHALL BE COMPLETED BY JULY 31, 2022.

4. ACCEPTANCE TEST:

EACH COUPLING SHALL BE SUBJECT TO A HYDROSTATIC PROOF PRESSURE TEST PER AS1895.

5. INTERMATEABILITY:

THIS COUPLING, WHEN MATED WITH FLANGES, FLANGE ENDS, AND SEALS CONFORMING TO AS1895/2-XXX, AS1895/3-XXX, AS1895/7-XXX, AS1895/10-XXX, AS1895/11-XXX, AS1895-12-XXX, AS1895/13-XXX, AS1895/18-XXX, AS1895/19-XXX, AND AS1895/23-XXX SHALL MEET ALL THE REQUIREMENTS OF SPECIFICATION AS1895.

/6/ MARKING:

BY ELECTROCHEMICAL ETCHING PER AS478-7A2 OR LASER MARKING PER AS478-15A2. THE COUPLING SHALL BE MARKED AS FOLLOWS:

- a. AS1895/1
- b. SUPPLIER PART NO.
- c. SUPPLIER NAME, TRADEMARK OR CAGE CODE
- d. DATE OF MANUFACTURE
- e. TORQUE – “CAUTION: TORQUE TO 120 LB-IN  $\pm$  5 LB-IN” /12/

/7/ THREADS:

- a. EYEBOLT AND NUT THREADS CONFORM TO AS8879
- b. EYEBOLT THREAD .3125-24UNJF-3A
- c. SELF-LOCKING NUT THREAD .3125-24UNJF-3B

8. OPERATING TEMPERATURE: -65 TO +1200 °F FLUID TEMPERATURE.

9. BREAK EDGES .003 TO .015, UNLESS OTHERWISE SPECIFIED.

10. DIMENSIONING AND TOLERANCING: ANSI Y14.5M 1982.

11. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS .XXX =  $\pm$ .010, .XX =  $\pm$ .03, ANGULAR DIMENSIONS,  $\pm$ .5°.

/12/ TORQUE – COUPLING INSTALLATION TORQUE = 120 LB-IN  $\pm$  5 LB-IN.

/13/ THE FOOL PROOF SAFETY FEATURE RESULTS IN AN INCREASE OF OVERALL ENVELOPE DIMENSION R MAX BY .020 INCH MAXIMUM, AND IN A WEIGHT INCREASE OF .026 POUNDS MAXIMUM.

/14/ DIAMETER A MAXIMUM IS FOR MACHINING PURPOSES ONLY, TO BE INSPECTED DURING MACHINING OPERATION.

15. REVISION INDICATOR: A CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT, INCLUDING TECHNICAL REVISIONS. CHANGE BARS AND (R) ARE NOT USED IN ORIGINAL PUBLICATIONS, NOR IN DOCUMENTS THAT CONTAIN EDITORIAL CHANGES ONLY.

/16/ INTENDED USE: USE DRY FILM LUBRICATED NUTS AT NUT TEMPERATURES OF 1000 °F AND OVER.

	<b>AEROSPACE STANDARD</b>	<b>AS1895™/1</b> SHEET 4 OF 5	<b>REV.</b> <b>G</b>
	COUPLING, V-RETAINER, SINGLE LATCH, TYPE I STANDARD PROFILE		