


AS1895/4

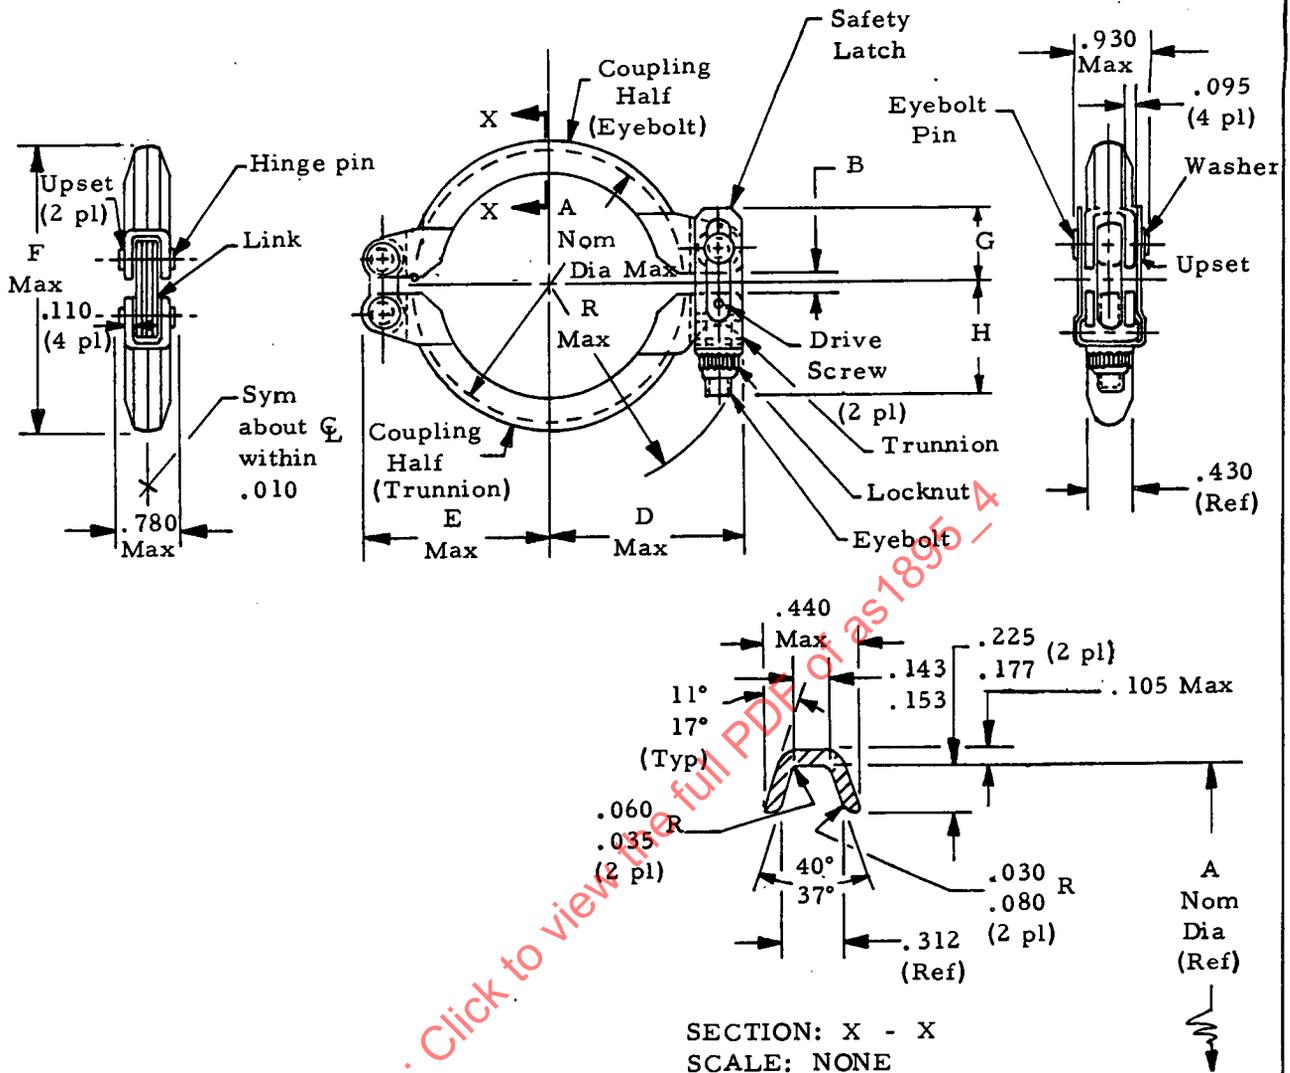

SECTION: X - X  
SCALE: NONE

| PART NUMBER  | NOM TUBE SIZE | A NOM DIA MAX | B MIN | D MAX | E MAX | F MAX | G MAX | H MAX | R MAX | MAX WT (LBS) | TORQUE IN IN-LBS |
|--------------|---------------|---------------|-------|-------|-------|-------|-------|-------|-------|--------------|------------------|
| AS1895/4-100 | 1.00          | 1.600         | .150  | 1.403 | 1.387 | 1.916 | .840  | 1.410 | 1.860 | .32          | 75-90            |
| AS1895/4-125 | 1.25          | 1.850         | .150  | 1.528 | 1.512 | 2.166 | .850  | 1.410 | 2.020 | .33          | 75-90            |
| AS1895/4-150 | 1.50          | 2.100         | .150  | 1.653 | 1.637 | 2.416 | .850  | 1.410 | 2.110 | .33          | 75-90            |
| AS1895/4-175 | 1.75          | 2.334         | .150  | 1.778 | 1.762 | 2.666 | .875  | 1.425 | 2.220 | .34          | 75-90            |
| AS1895/4-200 | 2.00          | 2.600         | .175  | 1.903 | 1.887 | 2.916 | .900  | 1.450 | 2.330 | .34          | 75-90            |
| AS1895/4-225 | 2.25          | 2.834         | .175  | 2.028 | 2.012 | 3.166 | .925  | 1.475 | 2.440 | .37          | 75-90            |
| AS1895/4-250 | 2.50          | 3.100         | .190  | 2.153 | 2.137 | 3.416 | .925  | 1.475 | 2.550 | .37          | 75-90            |
| AS1895/4-275 | 2.75          | 3.350         | .190  | 2.278 | 2.262 | 3.666 | .950  | 1.525 | 2.700 | .40          | 75-90            |
| AS1895/4-300 | 3.00          | 3.600         | .190  | 2.403 | 2.387 | 3.916 | .950  | 1.550 | 2.800 | .42          | 85-100           |
| AS1895/4-325 | 3.25          | 3.834         | .300  | 2.528 | 2.512 | 4.166 | 1.100 | 1.575 | 2.920 | .41          | 90-105           |
| AS1895/4-350 | 3.50          | 4.100         | .350  | 2.653 | 2.637 | 4.416 | 1.125 | 1.600 | 3.030 | .42          | 95-110           |
| AS1895/4-400 | 4.00          | 4.600         | .400  | 2.903 | 2.887 | 4.916 | 1.150 | 1.600 | 3.240 | .44          | 100-115          |
| AS1895/4-450 | 4.50          | 5.100         | .450  | 3.153 | 3.137 | 5.416 | 1.175 | 1.650 | 3.490 | .48          | 105-120          |
| AS1895/4-500 | 5.00          | 5.600         | .500  | 3.403 | 3.387 | 5.916 | 1.200 | 1.675 | 3.700 | .53          | 105-120          |
| AS1895/4-550 | 5.50          | 6.100         | .550  | 3.653 | 3.637 | 6.416 | 1.225 | 1.700 | 3.940 | .57          | 110-125          |
| AS1895/4-600 | 6.00          | 6.600         | .600  | 3.903 | 3.887 | 6.916 | 1.400 | 1.725 | 4.170 | .61          | 110-125          |

CUSTODIAN: SAE G-3/G-3A    PROCUREMENT SPECIFICATION AS1895



400 Commonwealth Drive  
Warrendale, PA 15096

AEROSPACE STANDARD

COUPLING, TYPE II  
(LOW PROFILE)

AS1895/4

SHEET 1 OF 2

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."  
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.