
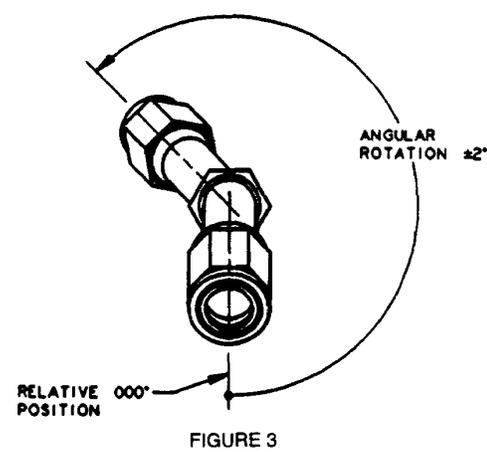
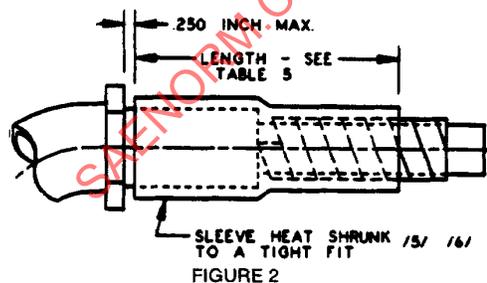
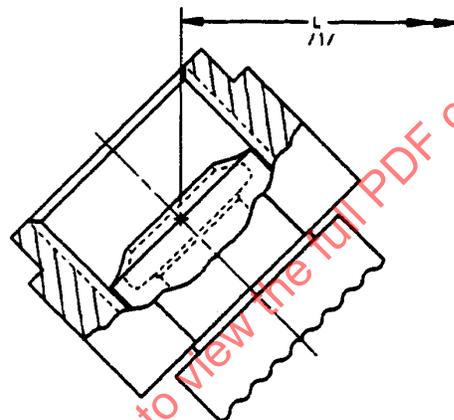



REV. B

AS1912

FEDERAL SUPPLY CLASS 4720

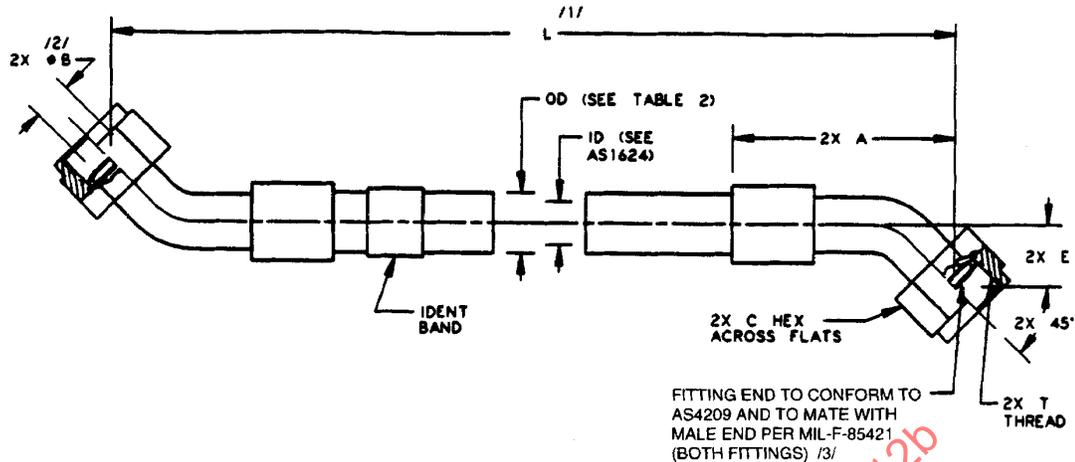

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: /13/ AS1339

**SAE** The Engineering Society  
For Advancing Mobility  
Land Sea Air and Space  
**INTERNATIONAL**  
400 Commonwealth Drive, Warrendale, PA 15096-0001

**AEROSPACE STANDARD**

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,  
CRES REINFORCED, 400°F, 3000 psi,  
LIGHTWEIGHT, BEAM SEAL, 45° TO 45°

**AS1912**  
SHEET 1 OF 5

**REV. B**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."  
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright 2001 Society of Automotive Engineers, Inc. All rights reserved.

Printed in the U.S.A.

TO PLACE A DOCUMENT ORDER: (724) 776-4970 FAX: (724) 776-0790 SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1985-08 REVISED 1996-03 REAFFIRMED 2001-12

(R) TABLE 1 - HOSE AND FITTING DIMENSIONS

| HOSE ASSEMBLY NO. AND SIZE CODE | THREAD T PER MIL-S-8879 REF | SIZE REF | A MAX | B BALL SIZE MIN THRU DIA /2/ |      | C HEX REF |      | E MIN | E MAX |
|---------------------------------|-----------------------------|----------|-------|------------------------------|------|-----------|------|-------|-------|
|                                 |                             |          |       | MS19059 DASH NO.             | IN   | REF       | MAX  |       |       |
| AS1912E                         | .4375-24UNJS-3B             | .250     | 1.90  | .4807                        | .109 | .56       | .450 | .550  |       |
| AS1912G                         | .5625-20UNJS-3B             | .375     | 2.35  | .4812                        | .188 | .69       | .517 | .600  |       |
| AS1912H                         | .7188-20UNJS-3B             | .500     | 2.50  | .4816                        | .313 | .88       | .513 | .675  |       |
| AS1912J                         | .8438-18UNJS-3B             | .625     | 2.70  | .4818                        | .375 | 1.00      | .620 | .765  |       |
| AS1912K                         | 1.0000-16UNJ-3B             | .750     | 3.15  | .4821                        | .469 | 1.125     | .760 | .874  |       |
| AS1912M                         | 1.2500-14UNJS-3B            | 1.000    | 3.50  | .4829                        | .719 | 1.50      | .890 | .950  |       |

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETERS

| SLEEVE CODE | SLEEVE MATERIAL   | TEMP LIMIT °F | HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ |           | HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ |            | HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ |             | HOSE OR SLEEVE OUTSIDE DIAMETERS (MAX-MIN) /4/ |    |
|-------------|---|---------------|--|-----------|--|------------|--|-------------|--|----|
|             |   |               | .250   | .375      | .500   | .625       | .750   | 1.000       |  |    |
| -           | (-) INDICATES HOSE ONLY   | 400           | --   | --        | --   | --         | --   | --          | --   | -- |
| A           | NO SLEEVE (SEE AS1624)  | 400           | .500/.440                                      | .600/.540 | .730/.670                                      | .840/.780  | 1.110/1.050                                    | 1.400/1.340 |  |    |
| B           | ABRASION SLEEVE TUBULAR /5/ (TFE-AS1291-CODE B)   | 275           | .450/.390                                      | .550/.490 | .695/.635                                      | .810/.750  | 1.080/1.020                                    | 1.360/1.300 |  |    |
| C           | ABRASION SLEEVE COIL /6/ (NYLON AS1294)   | 400           | .625/.500                                      | .750/.625 | .875/.750                                      | 1.000/.875 | 1.250/1.125                                    | 1.500/1.375 |  |    |
| E           | FIRE SLEEVE (AS1072 SIL-FG) (15 min) /7/ /8/ /11/                                       | 350           | .424/.374                                      | .540/.480 | .665/.615                                      | .790/.730  | 1.070/1.010                                    | 1.350/1.290 |  |    |
| F           | ABRASION SLEEVE SHRINK-ON (FEP) (M23053/11) /10/  | 275           | .450/.400                                      | .560/.505 | .695/.645                                      | .810/.750  | 1.080/1.020                                    | 1.360/1.300 |  |    |
| H           | ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /10/                             | 400           | --   | --        | --   | --         | --   | --          |  |    |
| K           | FIRE SLEEVE INTEGRAL SILICONE (15 min) (SEE AS1722) /11/ /12/                           | 300           | .490/.444                                      | .570/.535 | .695/.650                                      | .800/.760  | 1.070/1.030                                    | 1.350/1.310 |  |    |
| L           | INTEGRAL ABRASION SLEEVE /9/ (BRAIDED) POLYESTER ABRASION SLEEVE COIL /6/ (PTFE-AS1293) | 400           | .550/.440                                      | .600/.540 | .730/.670                                      | .862/.802  | 1.110/1.050                                    | 1.400/1.340 |  |    |

REV.  
B

AS1912

TABLE 3 - HOSE ASSEMBLY LENGTH TOLERANCES

| HOSE ASSEMBLY LENGTH | AVAILABLE INCREMENTS     | TOLERANCE |
|----------------------|--------------------------|-----------|
| UNDER 18 in          | (NOT LESS THAN) .125 in  | ±.125 in  |
| 18 TO 36 in          | (NOT LESS THAN) .250 in  | ±.250 in  |
| 36 TO 50 in          | (NOT LESS THAN) .500 in  | ±.500 in  |
| OVER 50 in           | (NOT LESS THAN) 1.000 in | ±1%       |

TABLE 4 - WEIGHTS

| HOSE OR SLEEVE CODE | HOSE OR TYPE SLEEVE                               | UNITS | REFERENCE                        | REFERENCE                        | REFERENCE                        | REFERENCE                        | REFERENCE                        | REFERENCE                         |
|---------------------|---|-------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|
|                     |   |       | WEIGHT LB/IN /23/ HOSE SIZE .250 | WEIGHT LB/IN /23/ HOSE SIZE .375 | WEIGHT LB/IN /23/ HOSE SIZE .500 | WEIGHT LB/IN /23/ HOSE SIZE .625 | WEIGHT LB/IN /23/ HOSE SIZE .750 | WEIGHT LB/IN /23/ HOSE SIZE 1.000 |
| --                  | HOSE ONLY (SEE AS1624)                            | LB/IN | --                               | --                               | --                               | --                               | --                               | --                                |
| A                   | ABRASION SLEEVE (TFE-AS1291-B)                    | LB/IN | .003                             | .004                             | .004                             | .005                             | .007                             | .009                              |
| B                   | ABRASION SLEEVE (NYLON AS1294)                    | LB/IN | .001                             | .002                             | .003                             | .003                             | .004                             | .005                              |
| C                   | FIRESLEEVE (15 min) AS1072                        | LB/IN | .007                             | .009                             | .011                             | .012                             | .017                             | .021                              |
| E                   | ABRASION SLEEVE (FEP)                             | LB/IN | .002                             | .003                             | .003                             | .005                             | .006                             | .007                              |
| F                   | ABRASION SLEEVE (AS1073B)                         | LB/IN | .002                             | .003                             | .003                             | .004                             | .005                             | .006                              |
| H                   | FIRESLEEVE INTEGRAL (15 min) ON HOSE (SEE AS1722) | LB/IN | --                               | --                               | --                               | --                               | --                               | --                                |
| K                   | ABRASION SLEEVE POLYESTER WITH HOSE               | LB/IN | .012                             | .016                             | .022                             | .030                             | .060                             | .090                              |
| L                   | ABRASION SLEEVE (PTFE-AS1293)                     | LB/IN | .003                             | .004                             | .005                             | .005                             | .006                             | .007                              |
| NONE                | FIRESLEEVE CLAMP /23/                             | LB/EA | .025                             | .025                             | .025                             | .026                             | .026                             | .033                              |
| NONE                | FITTING END (45°) /23/                            | LB/EA | .065                             | .095                             | .160                             | .240                             | .420                             | .700                              |

TABLE 5 - SLEEVE LENGTHS

| HOSE SIZE  | LENGTH (in) |
|------------|-------------|
| .250/.375  | 2.00 ± .25  |
| .500/.625  | 2.50 ± .25  |
| .750/1.000 | 3.00 ± .25  |

REV.  
B

AS1912

NOTES:

- /1/ LENGTH "L" IS A THREE DIGIT NUMBER OF WHICH THE FIRST TWO DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE THIRD DIGIT, THE FRACTION OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM OUTER CORNER OF SEALING SURFACE TO OUTER CORNER OF SEALING SURFACE AS SHOWN IN FIGURE 1. FOR LENGTH INCREMENTS AND TOLERANCES SEE TABLE 3.
- /2/ A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED THROUGH THE FITTING I.D. HOWEVER, THE APPLICABLE BALL DIAMETER LISTED IN TABLE 1 SHALL PASS THROUGH THE END FITTING AFTER IT IS ASSEMBLED TO THE HOSE.
- /3/ STANDARD COUPLING NUTS SHALL MATE WITH MIL-F-85421 FITTING ENDS. NONSTANDARD COUPLING NUTS MAY BE USED, PROVIDED THEY ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT AND PROVIDED THEY CANNOT BE REMOVED FROM THE FITTING. NUTS SHALL MEET TORQUE TEST REQUIREMENTS PER AS1339 EXCEPT TORQUE VALUES SHALL BE PER MIL-F-85421. THE THREAD AND ALL INTERNAL SURFACES SHALL BE DRY-FILM LUBRICATED WITH MIL-L-46010 TYPE I COATING. ALL EXTERNAL SURFACES MAY BE DRY-FILM COATED.
- /4/ DIAMETERS ARE LISTED FOR CLAMP SELECTION. TUBULAR SLEEVES MAY NOT BE A PERFECT ROUND AND SHALL BE MEASURED WITH A DIAMETER TAPE RULER (OFTEN REFERRED TO AS PI-TAPE).
- /5/ TUBULAR ABRASION (TFE) SLEEVES SHALL HAVE AN I.D. NO GREATER THAN HOSE O.D. +.05 in. AXIAL MOVEMENT OF THE SLEEVE INSTALLED ON THE HOSE SHALL NOT EXCEED .05 in. ENDS OF THE TUBULAR SLEEVE SHALL BE TERMINATED WITH A LENGTH OF M23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR, PER TABLE 5 AND FIGURE 2.
- /6/ COIL ABRASION SLEEVES, WHEN ASSEMBLED ON A STRAIGHT HOSE, SHALL HAVE AN AVERAGE GAP BETWEEN COILS NOT EXCEEDING .05 in. DISPLACEMENT OF THE COILS OF THE SLEEVE, CAUSING A GREATER GAP, SHALL NOT BE CAUSE FOR REJECTION IF THE COILS CAN BE REPOSITIONED TO MEET THE GAP REQUIREMENTS. ENDS OF THE COIL SLEEVE SHALL BE TERMINATED WITH A LENGTH OF HEAT SHRINKABLE SLEEVING IN ACCORDANCE WITH TABLE 5 AND FIGURE 2. CODE "B" (NYLON COIL) ABRASION SLEEVES SHALL BE TERMINATED WITH M23053/5, CLASS 1 OR 3, COLOR BLACK. CODE "L" (COIL ABRASION) SLEEVES SHALL BE TERMINATED WITH M23053/12A, CLASS 1, COLOR TRANSPARENT, PTFE. (OPTIONAL M23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR.)
- /7/ THE TABLE 2 SLEEVE DIAMETERS FOR AS1072 SLEEVE APPLIES WHEN THE SLEEVE IS COMPRESSED, OR CLAMPED, TO CONTACT THE HOSE. IN THIS CASE A WRINKLE MAY OCCUR OVER APPROXIMATELY 10% OF THE SLEEVE CIRCUMFERENCE.
- /8/ THE CUT ENDS OF THE FIRESLEEVE SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION, TO PREVENT WICKING OF FLUIDS. THE FIRESLEEVE ENDS SHALL BE SECURED TO THE HOSE ASSEMBLY END FITTINGS WITH CORROSION RESISTANT STEEL BANDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRESLEEVE, WHICH EXPOSE THE FIBERGLASS, SHALL BE COATED WITH RTV SILICONE RUBBER.
- /9/ INTEGRAL ABRASION SLEEVE SHALL FORM AN INTEGRAL, PERMANENT PART OF THE HOSE AND SHALL TERMINATE A MAXIMUM OF .200 in FROM THE END OF THE COLLAR.
- /10/ FEP PER M23053/11 AND POLYOLEFIN PER AS1073-CODE B SHRINK ABRASION SLEEVES SHALL BE SHRUNK TO A SNUG FIT OVER THE HOSE AND END FITTING COLLARS.
- /11/ ADD "AS1055 TYPE IIB CLASS B-S/P" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE. "FIRE-PROOF" (15 min) WITH AS1055.
- /12/ THE ENDS OF THE INTEGRAL FIRESLEEVE AND FITTING SOCKET/COLLAR MAY BE COVERED WITH A SILICONE CUFF OR MOLDED AS REQUIRED TO COMPLY WITH /11/.
- /13/ THIS HOSE ASSEMBLY SHALL BE QUALIFIED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION AS1339. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.
- 14. MATERIALS: HOSE AND FITTINGS - PER AS1339.
- 15. CONSTRUCTION AND PERFORMANCE: AS1339 FITTINGS SHALL BE PERMANENTLY ATTACHED TO THE HOSE.
- 16. OPERATING CHARACTERISTICS: SEE AS1339.
- 17. DIMENSIONING AND TOLERANCING: ANSI Y14.5M-1982.
- 18. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.  
TOLERANCES: LINEAR DIMENSIONS  $\pm .010$ , ANGULAR DIMENSIONS  $\pm 2^\circ$ .
- 19. MARKING SHALL BE PER AS1339 ON A STAINLESS STEEL BAND NOT OVER 1.0 in WIDE, OR ON THE COLLAR, THE CHARACTERS SHALL BE A MINIMUM OF .063 in HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOVEMENT AND RESULTANT CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND. HOSE ASSEMBLY DATE AND "PT" SYMBOL SHALL BE ELECTROETCHED OR STAMPED ON THE BAND OR ON AN END FITTING OR A FIRESLEEVE CLAMP.
- /20/ LOCKWIRE HOLES, LOCATION, AND DIAMETER PER AS1043. LOCKWIRE HOLE DESIGNATION IS AS FOLLOWS:
  - a. X = NONE
  - b. U = TWO HOLES, 180° APART
  - c. W = THREE HOLES, 120° APART

**AEROSPACE STANDARD**

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,  
CRES REINFORCED, 400°F, 3000 psi,  
LIGHTWEIGHT, BEAM SEAL, 45° TO 45°

**AS1912**  
SHEET 4 OF 5

**REV.**  
**B**