

**REV.  
A**

**AS21910**

**NOTICE**

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS21910F, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS21910F, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as21910a

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1998-03 REVISED 2001-03

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS18280



**AEROSPACE STANDARD**


TEE, BULKHEAD, FLARELESS TUBE,  
INTERNAL THREAD ON SIDE

**AS21910**  
SHEET 1 OF 3

**REV.  
A**

REV.  
A

AS21910

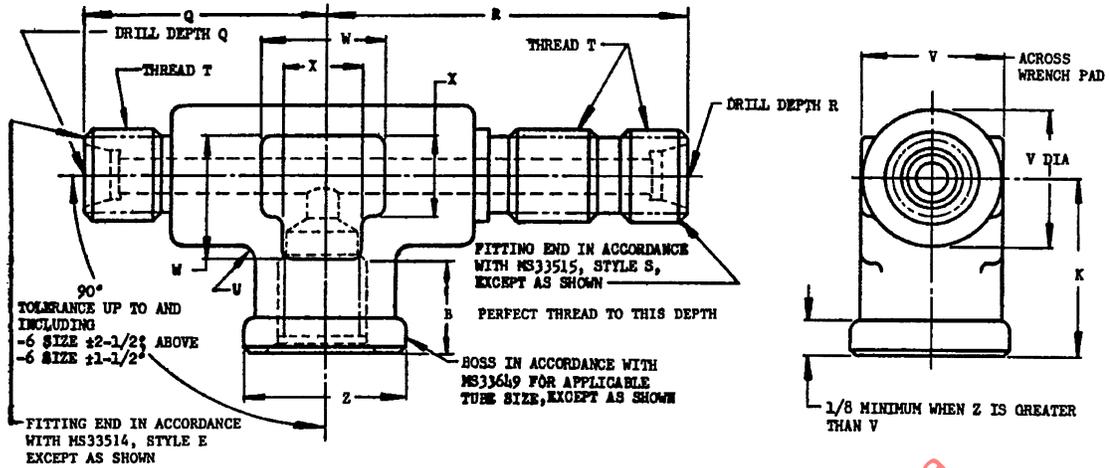

DASH NO.	TUBE OD	THREAD T MIL-S-8879	B MIN	K +3/64 -0	Q +3/64 -0	R +3/64 -0	U RAD	V	W APPROX	X APPROX	Z DIA	WT LB, MAX		
												STEEL	AL ALLOY	TI ALLOY
-2	1/8	.3125-24 UNJF-3A	.375	5/8	27/32	3/8	1/16	1/2	15/32	3/16	9/16	.051	.018	.029
-3	3/16	.3750-24 UNJF-3A	.406	11/16	29/32	1-29/64			9/16	1/2	5/8	.104	.039	.060
-4	1/4	.4375-20 UNJF-3A	.438	3/4	1-3/32	1-43/64	3/32	3/4	11/16		3/4	.233	.083	.134
-5	5/16	.5000-20 UNJF-3A								7/16		.278	.099	.160
-6	3/8	.5625-18 UNJF-3A	.469	13/16	1-5/32	1-57/64		7/8	25/32		7/8	.326	.116	.188
-8	1/2	.7500-16 UNJF-3A	.562	1	1-11/32	2-1/32		1-1/16	29/32	1/2	1-1/16	.554	.197	.319
-10	5/8	.8750-14 UNJF-3A	.625	1-5/32	1-1/2	2-1/4	1/8				1-3/16	.579	.206	.334
-12	3/4	1.0625-12 UNJ-3A		1-11/32	1-61/64	2-7/16		1-5/16	1-3/32	5/8	1-7/16	1.012	.360	.583
-16	1	1.3125-12 UNJ-3A	.688	1-17/32	1-27/32	2-21/32		1-5/8	1-5/16	3/4	1-11/16	1.340	.455	.773
-20	1-1/4	1.6250-12 UNJ-3A		1-23/32	1-63/64	2-51/64		1-7/8	1-1/2	7/8	2	1.950	.672	1.125

- MATERIAL: CARBON STEEL - FORGINGS  
ALUMINUM ALLOY - FORGINGS  
CORROSION RESISTANT STEEL FORGINGS  
TITANIUM ALLOY - FORGINGS  
SEE PROCUREMENT SPECIFICATION  
NOTE: PARTS MADE FROM 1137 OR 1141 FORGINGS QUALIFIED TO MIL-F-18280C SHALL NOT BE SUPPLIED AFTER 30 JUNE 1984.
- FINISH: SEE PROCUREMENT SPECIFICATION
- BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
- DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.
- PART NUMBERS:  
NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.  
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (2014).  
ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).  
ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.  
ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.  
ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 27 JUNE 1969.  
ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V).

EXAMPLES OF PART NUMBERS:

- MS21910-8 - TEE, 1/2 TUBING, CARBON STEEL
- MS21910D8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (2014).
- MS21910W8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (7075).
- MS21910J8 - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
- MS21910K8 - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
- MS21910-8S - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
- MS21910-8T - TEE, 1/2 TUBING, TITANIUM ALLOY (6AL-4V)