

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**REV.
B**

AS22759™/50

FEDERAL SUPPLY CLASS
6145

RATIONALE


THE AE-8D COMMITTEE HAS DETERMINED THIS DOCUMENT WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. THE WIRES ARE WELL ESTABLISHED AND NO LONGER RECOMMENDED FOR AIRCRAFT APPLICATIONS (REFER TO AS50881). THERE ARE NO QUALIFIED SUPPLIERS.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8D WIRE AND CABLE COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as22759_50b

For more information on this standard, visit
<https://www.sae.org/standards/content/AS22759/50B/>

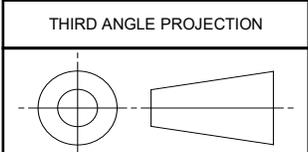

CUSTODIAN: AE-8/AE-8D PROCUREMENT SPECIFICATION: AS22759



AEROSPACE STANDARD
 WIRE, ELECTRICAL, FLUOROPOLYMER-INSULATED,
 CROSSLINKED MODIFIED ETFE, LOW FLUORIDE, NORMAL
 WEIGHT, 80 MICROINCH SILVER-COATED COPPER
 200 °C, 600 VOLT, ROHS


AS22759™/50

**REV.
B**

ISSUED 2012-02 REVISED 2015-08 RE-AFFIRMED 2020-05 STABILIZED 2021-08

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS22759.

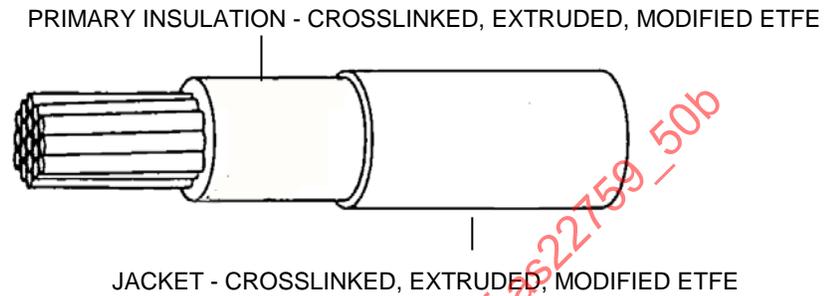

ETFE - ETHYLENE TETRAFLUOROETHYLENE
CONDUCTOR - STRANDED SILVER COATED COPPER

FIGURE 1 - AS22759/50 CONFIGURATION

SAENORM.COM : Click to view the full PDF of AS22759 - 50b

	AEROSPACE STANDARD	AS22759™/50 SHEET 1 OF 4	REV. B
	WIRE, ELECTRICAL, FLUOROPOLYMER-INSULATED, CROSSLINKED MODIFIED ETFE, LOW FLUORIDE, NORMAL WEIGHT, 80 MICROINCH SILVER-COATED COPPER 200 °C, 600 VOLT, ROHS		

TABLE 1 - CONSTRUCTION DETAILS FOR FINISHED WIRE

PART NO. <u>1/</u>	WIRE SIZE	STRANDING (NUMBER OF STRANDS X SIZE GAUGE OF STRANDS) <u>2/</u>	DIAMETER OF STRANDED CONDUCTOR (INCHES)		FINISHED WIRE		
			(MIN)	(MAX)	RESISTANCE AT 20 °C (68 °F) (OHMS/1,000 FEET) MAX	DIAMETER (INCHES)	WEIGHT (LB/1,000 FEET) (MAX)
M22759/50-30-*	30	7 X 38	.0105	.0124	100.7	.032 ± .002	1.0
M22759/50-28-*	28	7 X 36	.0135	.0154	63.8	.035 ± .002	1.3
M22759/50-26-*	26	19 X 38	.0175	.0194	38.4	.040 ± .002	1.7
M22759/50-24-*	24	19 X 36	.0225	.0244	24.3	.045 ± .002	2.3
M22759/50-22-*	22	19 X 34	.0285	.0304	15.1	.050 ± .002	3.3
M22759/50-20-*	20	19 X 32	.0365	.0384	9.19	.058 ± .002	4.7
M22759/50-18-*	18	19 X 30	.0455	.0484	5.79	.070 ± .002	7.2
M22759/50-16-*	16	19 X 29	.0515	.0544	4.52	.077 ± .003	9.0
M22759/50-14-*	14	19 X 27	.0645	.0684	2.88	.094 ± .003	13.8
M22759/50-12-*	12	37 X 28	.0835	.0874	1.90	.111 ± .003	20.5
M22759/50-10-*	10	37 X 26	.106	.112	1.19	.134 ± .004	32.4

1/ PART NUMBER: THE ASTERISKS IN THE PART NUMBER COLUMN, TABLES 1 AND 3, SHALL BE REPLACED BY COLOR CODE DESIGNATORS IN ACCORDANCE WITH MIL-STD-681. EXAMPLES: SIZE 20, WHITE-M22759/50-20-9; WHITE WITH ORANGE STRIPE - M22759/50-20-93. PRINTING OF COLOR CODE DESIGNATOR ON SURFACE OF WIRE INSULATION IS NOT REQUIRED.

2/ CONDUCTOR SHALL CONFORM TO AS29606, TYPE SCC1 SMALL DIAMETER 80 MICROINCH SILVER PLATED COPPER CONDUCTOR FOR WIRE SIZES 30 THROUGH 12 AND GENERAL PURPOSE 80 MICROINCH SILVER PLATED COPPER CONDUCTOR FOR WIRE SIZE 10.

REQUIREMENT: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS22759.

1. WIRE CONSTRUCTION:

WIRE CONSTRUCTION SHALL BE IN ACCORDANCE WITH FIGURE 1 AND TABLES 1, 2, 3, AND 4.

2. WIRE PERFORMANCE RATING:

TEMPERATURE RATING: 200 °C (392 °F) MAXIMUM CONDUCTOR CONTINUOUS TEMPERATURE.

VOLTAGE RATING: 600 VOLTS (RMS) AT SEA LEVEL. THIS INSULATION SYSTEM HAS BEEN USED IN AEROSPACE APPLICATIONS USING 115 VOLTS (PHASE TO NEUTRAL), 400 HERTZ AC AND 28 VOLTS DC. VERIFICATION OF THE SUITABILITY OF THIS PRODUCT FOR USE IN OTHER ELECTRICAL SYSTEM CONFIGURATIONS IS THE RESPONSIBILITY OF THE USER.

3. MATERIALS AND PHYSICAL PROPERTIES:

SEE AS22759 FOR MATERIAL REQUIREMENT. MATERIALS USED IN THE MANUFACTURE OF THESE PRODUCTS SHALL COMPLY WITH THE RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE 2002/95/EC.

4. FINISHED WIRE INSULATION PROPERTIES:

PRIMARY INSULATION SHALL HAVE A CONTRASTING PIGMENTATION TO THAT OF THE JACKET.

PHYSICAL PROPERTIES OF INSULATION: PRIMARY INSULATION SHALL BE SEPARATED FROM THE OUTER JACKET FOR DETERMINATION OF PRIMARY INSULATION TENSILE STRENGTH AND ELONGATION.

FINISHED WIRE INSULATION PROPERTIES SHALL BE IN ACCORDANCE WITH TABLE 2.

	AEROSPACE STANDARD WIRE, ELECTRICAL, FLUOROPOLYMER-INSULATED, CROSSLINKED MODIFIED ETFE, LOW FLUORIDE, NORMAL WEIGHT, 80 MICROINCH SILVER-COATED COPPER 200 °C, 600 VOLT, ROHS	AS22759™/50 SHEET 2 OF 4	REV. B

TABLE 2 - FINISHED WIRE INSULATION PROPERTIES REQUIREMENTS

INSULATION PROPERTIES	
SPARK TEST VOLTAGE	1,500 VOLT (RMS) AT 60 HERTZ OR 3,000 HERTZ ON PRIMARY INSULATION
IMPULSE TEST VOLTAGE	8.0 KILOVOLTS (PEAK)
HIGH FREQUENCY TEST VOLTAGE	5.7 KILOVOLTS (RMS)
FLUORIDE OFF-GASSING	MAXIMUM 20 PPM
CROSSLINK PROOF	300 °C ± 3 °C (572 °F ± 5.4 °F), 7 HOURS
INSULATION BLOCKING	230 °C ± 3 °C (446 °F ± 5.4 °F)
SHRINKAGE	230 °C ± 3 °C (446 °F ± 5.4 °F) MAXIMUM CHANGE .125 INCH
LAYER WICKING	2.25 INCHES (MAX) PROCEDURE: MULTI-LAYER WIRE
ELECTRICAL RESISTANCE (IR)	5,000 MEGOHMS (MIN) - 1,000 FEET
ELECTRICAL SURFACE RESISTANCE	500 MEGOHMS - INCHES (MIN)
WET DIELECTRIC VOLTAGE	2,500 VOLTS (RMS), 60 HERTZ
WALL THICKNESS	.003 INCH (MIN) FOR PRIMARY INSULATION .004 INCH (MIN) FOR OUTER JACKET .008 INCH (MIN) FOR TOTAL INSULATION
INSULATION TENSILE STRENGTH	5,000 LBF/IN ² (MIN) FOR PRIMARY INSULATION 5,000 LBF/IN ² (MIN) FOR TOTAL INSULATION
INSULATION ELONGATION	125% (MIN) FOR PRIMARY INSULATION 75% (MIN) FOR TOTAL INSULATION
UV LASER MARKING	75% MINIMUM AVERAGE
CONTINUOUS LENGTH SCHEDULE	B

5. FINISHED WIRE IDENTIFICATION:

WIRE IDENTIFICATION EXCEPTIONS: NONE

WIRE IDENTIFICATION DURABILITY: 125 CYCLES (250 STROKES) WITH 500 GRAMS WEIGHT

STRIPE AND BAND DURABILITY: 125 CYCLES (250 STROKES) WITH 500 GRAMS WEIGHT

6. FINISHED WIRE PERFORMANCE:

FINISHED WIRE FIXTURES APPLICABLE TO EACH WIRE SIZE SHALL BE IN ACCORDANCE WITH TABLE 3.

TABLE 3 - PERFORMANCE DETAILS

PART NO.	BEND TESTING			
	MANDREL DIAMETER ^{1/} (INCHES)		TEST LOAD ^{1/} (LB)	
	CROSSLINKING PROOF, IMMERSION AND LIFE CYCLE TESTS	COLD BEND TEST	CROSSLINKING PROOF, IMMERSION AND LIFE CYCLE TESTS	COLD BEND TEST
M22759/50-30-*	.375	1.00	.250	1.00
M22759/50-28-*	.375	1.00	.500	2.00
M22759/50-26-*	.375	1.00	.500	2.00
M22759/50-24-*	.375	1.00	.750	3.00
M22759/50-22-*	.500	1.00	1.00	3.00
M22759/50-20-*	.500	1.00	1.50	4.00
M22759/50-18-*	.750	1.50	2.00	4.00
M22759/50-16-*	1.00	1.50	2.00	5.00
M22759/50-14-*	1.00	2.00	3.00	5.00
M22759/50-12-*	1.50	2.00	3.00	5.00
M22759/50-10-*	2.00	3.00	3.00	5.00

^{1/} TOLERANCE SHALL BE ±3% OF THE GIVEN VALUES.

	AEROSPACE STANDARD WIRE, ELECTRICAL, FLUOROPOLYMER-INSULATED, CROSSLINKED MODIFIED ETFE, LOW FLUORIDE, NORMAL WEIGHT, 80 MICROINCH SILVER-COATED COPPER 200 °C, 600 VOLT, ROHS	AS22759™/50 SHEET 3 OF 4	REV. B