

**REV.
E**


AS22759™/86

RATIONALE


REMOVAL OF THE INTENDED USE LIMITATION FOR NAVAL AIRCRAFT AND NAVAL AIR SYSTEMS APPLICATION IS REQUIRED TO SYNCHRONIZE THIS DOCUMENT WITH THE REQUIREMENT OF AS50881.

NOTICE


THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS22759.

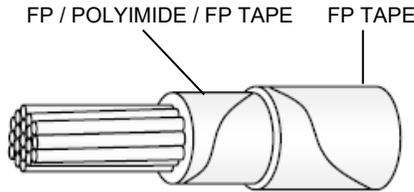

SIZE 26 THROUGH 10

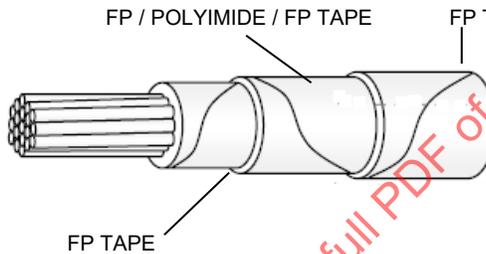

SIZE 8 THROUGH 6

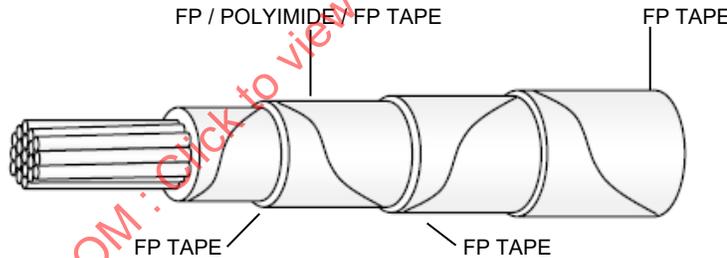


SIZE 4 THROUGH 04

FP - FLUOROCARBON POLYMER MODIFIED POLYTETRAFLUOROETHYLENE (PTFE)
CONDUCTOR - STRANDED SILVER COATED COPPER

FIGURE 1 - AS22759/86 CONFIGURATION

SAENARM.COM : Click to view the full PDF of as22759_86e

For more information on this standard, visit
<https://www.sae.org/standards/content/AS22759/86E/>

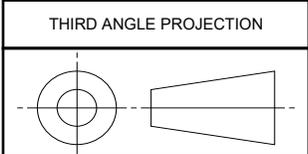

CUSTODIAN: AE-8/AE-8D

PROCUREMENT SPECIFICATION: AS22759



AEROSPACE STANDARD

WIRE, ELECTRICAL, POLYTETRAFLUOROETHYLENE/
POLYIMIDE INSULATED, NORMAL WEIGHT, SILVER COATED,
COPPER CONDUCTOR, 200 °C, 600 VOLT, ROHS

AS22759™/86
SHEET 1 OF 5

**REV.
E**

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 2000-06 REAFFIRMED 2006-04 REVISED 2022-03

TABLE 1 - CONSTRUCTION DETAILS FOR FINISHED WIRE

| PART NO. 1/ | WIRE SIZE | CONDUCTOR 3/ | | | | FINISHED WIRE | | | | |
|----------------|-----------|--|-----------------|-------|--|-----------------|------|--------------------------|--------|------|
| | | STRANDING (NUMBER OF STRANDS X SIZE GAUGE OF STRANDS) | DIAMETER (INCH) | | RESISTANCE AT 20 °C (68 °F) (OHMS/1000 FEET MAX) | DIAMETER (INCH) | | WEIGHT (LB/1000 FEET) 2/ | | |
| | | | MIN | MAX | | MIN | MAX | MIN | TARGET | MAX |
| M22759/86-26-* | 26 | 19 X 38 | .0175 | .0194 | 38.4 | .033 | .037 | 1.29 | 1.42 | 1.55 |
| M22759/86-24-* | 24 | 19 X 36 | .0225 | .0244 | 24.3 | .038 | .042 | 1.87 | 2.04 | 2.20 |
| M22759/86-22-* | 22 | 19 X 34 | .0285 | .0304 | 15.1 | .043 | .047 | 2.70 | 2.90 | 3.10 |
| M22759/86-20-* | 20 | 19 X 32 | .0365 | .0384 | 9.19 | .051 | .055 | 4.25 | 4.48 | 4.70 |
| M22759/86-18-* | 18 | 19 X 30 | .0455 | .0484 | 5.79 | .061 | .065 | 6.40 | 6.65 | 6.90 |
| M22759/86-16-* | 16 | 19 X 29 | .0515 | .0544 | 4.52 | .068 | .073 | 8.20 | 8.50 | 8.80 |
| M22759/86-14-* | 14 | 19 X 27 | .0645 | .0684 | 2.88 | .081 | .086 | 12.4 | 12.9 | 13.4 |
| M22759/86-12-* | 12 | 37 X 28 | .0835 | .0874 | 1.90 | .100 | .105 | 18.9 | 19.7 | 20.4 |
| M22759/86-10-* | 10 | 37 X 26 | .106 | .110 | 1.19 | .122 | .127 | 29.3 | 30.8 | 31.6 |
| M22759/86-8-* | 8 | 133 X 29 | .158 | .166 | .658 | .180 | .188 | 55.9 | 57.8 | 59.7 |
| M22759/86-6-* | 6 | 133 X 27 | .198 | .208 | .418 | .219 | .229 | 86.9 | 89.4 | 91.9 |
| M22759/86-4-* | 4 | 133 X 25 | .250 | .263 | .264 | .276 | .288 | 141 | 145 | 149 |
| M22759/86-2-* | 2 | 665 X 30 | .320 | .340 | .170 | .344 | .364 | 217 | 225 | 233 |
| M22759/86-1-* | 1 | 817 X 30 | .360 | .380 | .139 | .388 | .408 | 265 | 274 | 283 |
| M22759/86-01-* | 0 | 1045 X 30 | .395 | .425 | .108 | .420 | .450 | 335 | 349 | 363 |
| M22759/86-02-* | 00 | 1330 X 30 | .440 | .475 | .085 | .475 | .505 | 419 | 438 | 457 |
| M22759/86-03-* | 000 | 1665 X 30 | .500 | .540 | .068 | .530 | .560 | 528 | 548 | 568 |
| M22759/86-04-* | 0000 | 2109 X 30 | .565 | .605 | .054 | .590 | .630 | 676 | 698 | 720 |

- 1/ PART NUMBER: THE ASTERISKS IN THE PART NUMBER COLUMN OF TABLE 1 SHALL BE REPLACED BY COLOR CODE DESIGNATORS IN ACCORDANCE WITH MIL-STD-681. EXAMPLES: M22759/86-20-93 IS A 20 AWG WHITE WITH ORANGE STRIPE.
- 2/ THE ACCEPTABLE VALUE FOR THE CPK FOR THE FINISHED WIRE WEIGHT LISTED SHALL BE 1.3, USING A NORMAL (GAUSSIAN) DISTRIBUTION TO OBTAIN THOSE CPK VALUES.
- 3/ CONDUCTOR SHALL CONFORM TO AS29606 TYPE SCC SMALL DIAMETER SILVER COATED COPPER CONDUCTOR FOR WIRE SIZES 26 THROUGH 4 AND GENERAL PURPOSE FOR WIRE SIZES 2 THROUGH 0000.

REQUIREMENT: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS22759.

1. WIRE CONSTRUCTION:

WIRE CONSTRUCTION SHALL BE IN ACCORDANCE WITH FIGURE 1 AND TABLES 1, 2, 3, AND 4.

TABLE 2 - WIRE INSULATION MATERIALS

| TAPE CODE | THICKNESS (NOM) | MATERIAL |
|-----------|-----------------|---|
| 1 | .0020 | .0005 (FP)/.0010 (POLYIMIDE)/.0005 (FP) |
| 2 | .0010 | FP (SKIVED) |
| 3 | .0020 | FP (SKIVED) |
| 4 | .0020 | FP (UNSINTERED) |
| 5 | .0025 | FP (UNSINTERED) |
| 6 | .0030 | FP (UNSINTERED) |

TABLE 3 - TAPE OVERLAP REQUIREMENTS 1/

| WIRE SIZE | WRAP 1 | | WRAP 2 | | WRAP 3 | | WRAP 4 | | NOMINAL WALL THICKNESS (MILS) | | | | |
|-----------|-----------|-----------------|--------|-----------|-----------------|------|-----------|-----------------|-------------------------------|-----|------|------|------|
| | TAPE CODE | PERCENT OVERLAP | | TAPE CODE | PERCENT OVERLAP | | TAPE CODE | PERCENT OVERLAP | | | | | |
| | | MIN | MAX | | MIN | MAX | | MIN | | MAX | MIN | MAX | |
| 26 | 1 | 50.5 | 54.0 | 4 | 50.5 | 54.0 | | | | | | 7.4 | |
| 24 | 1 | 50.5 | 54.0 | 4 | 50.5 | 54.0 | | | | | | 7.4 | |
| 22 | 1 | 50.5 | 54.0 | 4 | 50.5 | 54.0 | | | | | | 7.4 | |
| 20 | 1 | 50.5 | 54.0 | 4 | 50.5 | 54.0 | | | | | | 7.4 | |
| 18 | 1 | 50.5 | 54.0 | 4 | 50.5 | 54.0 | | | | | | 7.4 | |
| 16 | 1 | 50.5 | 54.0 | 5 | 50.5 | 54.0 | | | | | | 8.3 | |
| 14 | 1 | 50.5 | 54.0 | 5 | 50.5 | 54.0 | | | | | | 8.3 | |
| 12 | 1 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | | | | | | 9.1 | |
| 10 | 1 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | | | | | | 9.1 | |
| 8 | 2 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 67.0 | 71.0 | | | 13.2 | |
| 6 | 2 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 67.0 | 71.0 | | | 13.2 | |
| 4 | 3 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | 16.2 |
| 2 | 3 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | 16.2 |
| 1 | 3 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | 16.2 |
| 1/0 | 3 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | 16.2 |
| 2/0 | 3 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | 16.2 |
| 3/0 | 3 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | 16.2 |
| 4/0 | 3 | 20.5 | 35.0 | 1 | 50.5 | 55.0 | 6 | 50.5 | 54.0 | 6 | 50.5 | 54.0 | 16.2 |

1/ WRAP 1 IS INNERMOST TAPE WHICH IS IN CONTACT WITH THE CONDUCTOR. WRAPS 2, 3, AND 4 ARE PROGRESSIVELY FURTHER AWAY FROM THE CONDUCTOR CORE.

2. WIRE PERFORMANCE RATING:

TEMPERATURE RATING: 200 °C (392 °F) MAXIMUM CONDUCTOR CONTINUOUS TEMPERATURE.

VOLTAGE RATING: 600 VOLTS (RMS) AT SEA LEVEL. THIS INSULATION SYSTEM HAS BEEN USED IN AEROSPACE APPLICATIONS USING 115 VOLTS (PHASE TO NEUTRAL), 400 HERTZ AC AND 28 VOLTS DC. VERIFICATION OF THE SUITABILITY OF THIS PRODUCT FOR USE IN OTHER ELECTRICAL SYSTEM CONFIGURATIONS IS THE RESPONSIBILITY OF THE USER.

3. MATERIALS AND PHYSICAL PROPERTIES:

REFER TO AS22759 FOR MATERIAL REQUIREMENT. MATERIALS USED IN THE MANUFACTURE OF THESE PRODUCTS SHALL COMPLY WITH THE RESTRICTION OF HAZARDOUS SUBSTANCES DIRECTIVE 2002/95/EC.

4. FINISH WIRE INSULATION PROPERTIES:

FINISH WIRE INSULATION PROPERTIES SHALL BE IN ACCORDANCE WITH TABLE 4.

TABLE 4 - FINISHED WIRE INSULATION PROPERTIES REQUIREMENTS

| INSULATION PROPERTIES | |
|-----------------------------|---|
| IMPULSE TEST VOLTAGE | 8.0 KILOVOLTS (PEAK) |
| HIGH FREQUENCY TEST VOLTAGE | 5.7 KILOVOLTS (RMS) |
| INSULATION STATE OF SINTER | 3.0 JOULES PER GRAM MAXIMUM WIRE SIZES 26-10 NOT REQUIRED FOR WIRE SIZES 8 AND LARGER |
| TAPE OVERLAP | TABLE 3 |
| LAMINATION SEALING | 260 °C ± 2 °C (500 °F ± 3.6 °F), 6 HOURS |
| INSULATION BLOCKING | 200 °C ± 2 °C (392 °F ± 3.6 °F) |
| SHRINKAGE | 230 °C ± 2 °C (446 °F ± 3.6 °F) |
| | MAXIMUM CHANGE .091 INCH WIRE SIZES 26-10 |
| | MAXIMUM CHANGE .125 INCH WIRE SIZE 8-0000 |
| ELECTRICAL RESISTANCE (IR) | 5000 MEGOHMS (MIN)-1000 FEET WIRE SIZES 26-10 |
| | 3000 MEGOHMS (MIN)-1000 FEET WIRE SIZES 8-0000 |
| WET DIELECTRIC VOLTAGE | 2500 VOLTS (RMS), 60 HERTZ |
| INSULATION STRIP FORCE | .25-6.0 POUNDS: WIRE SIZES 26-20 |
| | .50-7.0 POUNDS: WIRE SIZES 18-14 |
| UV LASER MARKING | 55% MINIMUM AVERAGE |
| CONTINUOUS LENGTH SCHEDULE | B |

5. FINISH WIRE IDENTIFICATION:

WIRE IDENTIFICATION EXCEPTIONS: NONE.

WIRE IDENTIFICATION DURABILITY: 125 CYCLES (250 STROKES) WITH 250 GRAMS WEIGHT.

STRIPE AND BAND DURABILITY: 125 CYCLES (250 STROKES) WITH 250 GRAMS WEIGHT.

6. FINISH WIRE PERFORMANCE:

FINISH WIRE FIXTURES APPLICABLE TO EACH WIRE SIZE SHALL BE IN ACCORDANCE WITH TABLE 5.

TABLE 5 - TEST MANDREL AND TEST LOAD REQUIREMENTS

| WIRE SIZE (AWG) | TEST MANDREL DIAMETER ^{1/} (INCHES) | | | TEST LOAD ^{1/} (POUNDS) | |
|-----------------|--|-----------------------|------|----------------------------------|-----------------------|
| | COLD BEND | LIFE CYCLE/ BEND TEST | WRAP | COLD BEND | LIFE CYCLE/ BEND TEST |
| 26 | 1.00 | .375 | .125 | 3.00 | .50 |
| 24 | 1.00 | .500 | .125 | 3.00 | .75 |
| 22 | 1.00 | .500 | .125 | 4.00 | 1.00 |
| 20 | 1.00 | .500 | .125 | 4.00 | 1.50 |
| 18 | 1.50 | .750 | .250 | 5.00 | 2.00 |
| 16 | 1.50 | 1.00 | .250 | 5.00 | 2.00 |
| 14 | 2.00 | 1.00 | .375 | 5.00 | 3.00 |
| 12 | 2.00 | 1.50 | .375 | 5.00 | 3.00 |
| 10 | 3.00 | 2.00 | .375 | 6.00 | 3.00 |
| 8 | 4.00 | 3.00 | .750 | 10.00 | 4.00 |
| 6 | 5.00 | 4.00 | 1.00 | 10.00 | 4.00 |
| 4 | 6.00 | 5.00 | 1.25 | 15.00 | 4.50 |
| 2 | 8.00 | 6.00 | 2.00 | 15.00 | 6.00 |
| 1 | 10.00 | 8.00 | 2.50 | 15.00 | 6.00 |
| 0 | 10.00 | 8.00 | 3.00 | 15.00 | 6.00 |
| 00 | 12.00 | 10.00 | 4.00 | 20.00 | 8.00 |
| 000 | 18.00 | 10.00 | 5.00 | 30.00 | 10.00 |
| 0000 | 18.00 | 10.00 | 6.00 | 30.00 | 10.00 |

^{1/} TOLERANCE SHALL BE ±3% OF THE GIVEN VALUES.

SAENORM.COM : Click to view the full PDF of AS22759-86E