

**REV.
D**

AS24586™

RATIONALE

UPDATE MATERIAL CALLOUT FOR STEEL WIRE, ADD DETAILED EXAMPLES OF PART NUMBERS, ADD NEW NOTE FOR DISPOSITION OF EXISTING INVENTORY.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS24586. THIS SAE STANDARD MAY RETAIN THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL'S) MAY CONTINUE TO BE MANDATORY FOR DoD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.


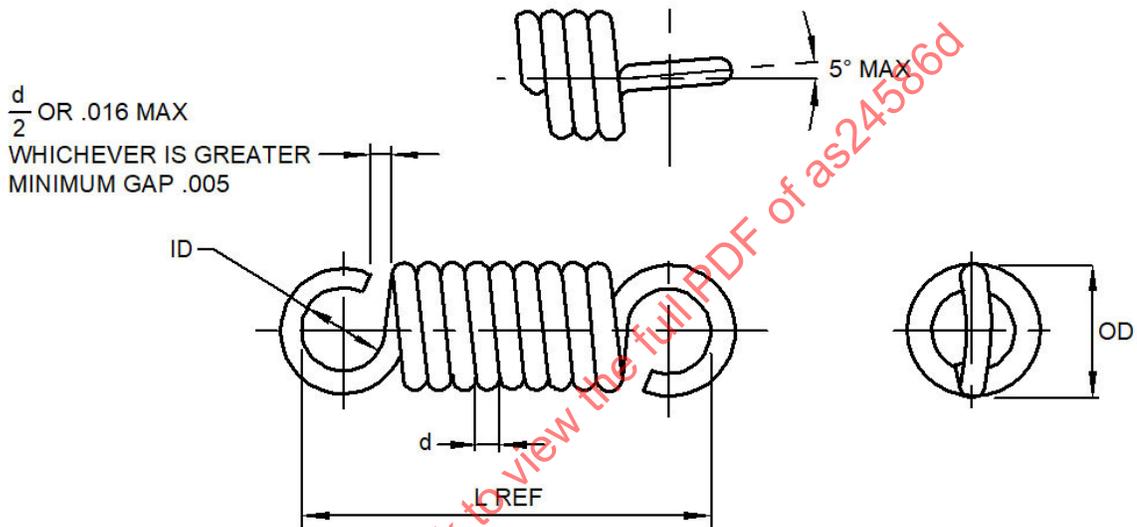


FIGURE 1 - SPRING

For more information on this standard, visit
<https://www.sae.org/standards/content/AS24586D>

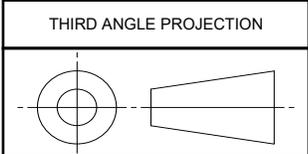

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS13572



AEROSPACE STANDARD

SPRING, HELICAL, EXTENSION
FOR LOADS BELOW 30 LBF

AS24586™
SHEET 1 OF 11

**REV.
D**

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

ISSUED 2001-10 REAFFIRMED 2006-05 REVISED 2021-05

TABLE 1 - CORRECTION FACTORS FOR STRESS RANGE, LIFE CYCLES, AND SPRING MATERIAL

MATERIAL	$\frac{P_2 - P_1}{P_2}$	CYCLES				
		5000	10000	50000	100000	INFINITE
MUSIC WIRE	.25	1.28	1.23	1.11	1.06	.95
	.50	1.23	1.16	1.00	.93	.76
	.75	1.21	1.12	.93	.84	.65
	1.00	1.17	1.08	.86	.77	.55
CORROSION-RESISTANT STEEL	.25	.92	.90	.83	.81	.77
	.50	.88	.84	.76	.72	.63
	.75	.85	.80	.68	.63	.51
	1.00	.83	.76	.61	.55	.41

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

1. MATERIAL: WIRE, STEEL, MUSIC, IN ACCORDANCE WITH ASTM A228/A228M. WIRE, STEEL, CORROSION-RESISTANT, IN ACCORDANCE WITH ASTM A313/A313M, COMPOSITION FS302 OR FS304, SPRING TEMPER.
2. PROTECTIVE COATING: CADMIUM PLATING IN ACCORDANCE WITH AMS-QQ-P-416, TYPE II, CLASS 2.
 ZINC COATING IN ACCORDANCE WITH ASTM B633, TYPE II, FE/ZN5.
 PASSIVATION TREATMENT IN ACCORDANCE WITH AMS2700.
3. ENDS: MACHINE FULL HOOK. END HOOKS SHALL BE PARALLEL WITHIN 22°. RELATIVE POSITION OF END HOOK OPENINGS IS OPTIONAL.
4. DIRECTION OF HELIX: OPTIONAL
5. TOLERANCE: OUTSIDE DIAMETER "OD" .120 TO .240 ± .005, .300 TO .500 ± .008, .650 TO 1.000 ± .015.
 WIRE DIAMETER "D" IN ACCORDANCE WITH MATERIAL SPECIFICATION.
 MAX EXTENSION "L₁" ±10% OF (L₁-L).
 SPRING RATE "R" ±10%.
6. ACTIVE COILS "N", INITIAL TENSION "T", AND DEFLECTION PER COIL "f", ARE FOR REFERENCE ONLY.
7. MAX LOAD "P", SHALL BE ATTAINED WITHIN THE TOLERANCE OF EXTENSION "L₁", TO DETERMINE LOAD "P", RATE "R" OR INITIAL TENSION "T", FOR CORROSION-RESISTANT STEEL, MULTIPLY THE VALUE GIVEN IN TABLE 2 BY .833.
8. SPRING VALUES SHOWN ARE FOR MUSIC WIRE AND ARE BASED ON A SERVICE LIFE OF 50000 CYCLES AT .50 STRESS RANGE. FOR USE UNDER OTHER OPERATING CONDITIONS, MULTIPLY MAX EXTENSION (L₁-L) BY THE FACTOR SHOWN IN TABLE 1 (SEE NOTE 7). P₁ = LOAD AT ASSEMBLED HEIGHT AND P₂ = FINAL LOAD.
9. TO DETERMINE LOAD "P" AT ANY EXTENSION OTHER THAN "L₁", MULTIPLY THE DISTANCE IN INCHES THAT THE SPRING WILL BE EXTENDED FROM THE FREE LENGTH "L", BY THE SPRING RATE "R", AND ADD THE INITIAL TENSION "T" (SEE NOTE 7).
10. MUSIC WIRE SPRINGS ARE NOT RECOMMENDED FOR APPLICATIONS WHEREIN THE TEMPERATURE EXCEEDS 250 °F. CORROSION-RESISTING STEEL SPRINGS ARE NOT RECOMMENDED FOR APPLICATIONS WHEREIN THE TEMPERATURE EXCEEDS 500 °F.
11. IN THE EVENT OF CONFLICTS BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
12. DIMENSIONS: ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.

	AEROSPACE STANDARD	AS24586™ SHEET 2 OF 11	REV. D
	SPRING, HELICAL, EXTENSION FOR LOADS BELOW 30 LBF		

13. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER /TABLE 2/.
EXAMPLES OF PART NUMBERS:

MS24586-9 STEEL WIRE PER ASTM A228/A228M, .115-.125 OUTSIDE Ø, .018 WIRE Ø, 1.500 LENGTH, 73.0 ACTIVE COILS.
 MS24586-1043 STEEL WIRE PER ASTM A228/A228M, CADMIUM PLATED, .235-.245 OUTSIDE Ø, .031 WIRE Ø, 1.625 LENGTH, 40.0 ACTIVE COILS.
 MS24586-1201 STEEL WIRE PER ASTM A228/A228M, ZINC COATED, .495-.505 OUTSIDE Ø, .063 WIRE Ø, 1.875 LENGTH, 17.0 ACTIVE COILS.
 MS24586-C284 CRES WIRE PER ASTM A313/A313M, PASSIVATED, .845-.855 OUTSIDE Ø, .055 WIRE Ø, 2.500 FREE LENGTH, 17.5 ACTIVE COILS.

14. UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
15. REVISION INDICATOR: A CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT, INCLUDING TECHNICAL REVISIONS. CHANGE BARS AND (R) ARE NOT USED IN ORIGINAL PUBLICATIONS, NOR IN DOCUMENTS THAT CONTAIN EDITORIAL CHANGES ONLY.

AS AND AMS ARE SAE INTERNATIONAL PUBLICATIONS.
 ASTM IS AN ASTM INTERNATIONAL PUBLICATION.

SAENORM.COM : Click to view the full PDF of as24586d

	AEROSPACE STANDARD		AS24586™ SHEET 3 OF 11	REV. D
	SPRING, HELICAL, EXTENSION FOR LOADS BELOW 30 LBF			

TABLE 2 - DIMENSIONS AND CHARACTERISTICS

Steel				OD	d	L	N	f	P 2/	T	L1 3/	R 2/	
Uncoated Dash No.	Cadmium Plated Dash No.	Zinc Plated Dash No.	Corrosion Resisting Dash No.										
1	501		C1	.120	.016	1.000	50.5	.0161	1.6	.20	1.81	1.74	
2	502		C2			1.125	58.5				2.07	1.49	
3	503		C3			1.250	66.0				2.31	1.32	
4	504		C4			1.375	74.0				2.57	1.18	
5	505		C5			1.500	82.0				2.82	1.06	
6	506	1006	C6		.018	.020	1.000	45.5	.0111	3.0	.20	1.60	3.33
7	507	1007	C7				1.125	52.0				1.81	2.89
8	508	1008	C8				1.250	59.0				2.03	2.55
9	509	1009	C9				1.375	66.5				2.25	2.28
10	510	1010	C10				1.500	73.0				2.47	2.06
11	511	1011	C11				1.625	80.0				2.69	1.88
12	512	1012	C12				1.750	87.0				2.90	1.72
13	513	1013	C13				1.875	94.0				3.12	1.60
14	514	1014	C14				2.000	101.0				3.34	1.49
15	515		C15				1.000	41.0				1.45	6.00
16	516		C16	.022	.026	1.125	47.0	.009	3.9	.40	1.64	5.24	
17	517		C17			1.250	53.5				1.84	4.58	
18	518		C18			1.375	60.0				2.04	4.06	
19	519		C19			1.500	66.0				2.23	3.70	
20	520		C20			1.625	72.5				2.43	3.35	
21	521		C21			1.750	78.5				2.62	3.10	
22	522		C22			1.875	84.5				2.81	2.89	
23	523		C23			2.000	91.0				3.01	2.67	
23	524		C24			1.000	37.5				1.34	10.38	
25	525		C25			1.125	43.0				1.51	9.04	
26	526		C26			1.250	49.0				1.69	7.94	
27	527		C27			1.375	54.5				1.86	7.20	
28	528		C28			1.500	60.0				2.04	6.48	
29	529		C29			1.625	66.0				2.22	5.89	
30	530		C30			1.750	71.5				2.39	5.48	
31	531		C31	.240	.026	1.875	77.0	.0424	3.3	.30	2.57	5.05	
32	532		C32			2.000	83.0				2.75	4.68	
33	533		C33			2.125	88.5				2.92	4.42	
34	534		C34			2.250	94.5				3.10	4.12	
35	535		C35			2.375	100.0				3.28	3.89	
36	536		C36			2.500	106.5				3.45	3.67	
37	537	1037	C37			1.000	23.0				1.97	3.08	
38	538	1038	C38			1.125	28.0				2.31	2.53	
39	539	1039	C39			1.250	32.5				2.64	2.18	
40	540	1040	C40			1.375	37.5				2.96	1.89	
41	541	1041	C41	.240	.026	1.500	42.0	.0424	3.3	.30	3.28	1.69	
42	542	1042	C42			1.625	47.0				3.62	1.51	
43	543	1043	C43			1.750	52.0				3.95	1.36	
44	544	1044	C44			1.875	56.5				4.27	1.25	
45	545	1045	C45			2.000	61.5				4.60	1.15	

2/ SEE NOTE 7.

3/ SEE NOTE 8.

Steel				O.D. Outside Dia.	d Wire Dia.	L Free Length	N Active Coils	f Defl. Per Coil	P 2/ Load Lb Max	T Initial Tension Lbs	L ₁ 3/ Ext Max	R 2/ Spring Rate Lb/in.				
Uncoated	Cadmium Plated	Zinc Coated	Corrosion Resisting													
Dash No.	Dash No.	Dash No.	Dash No.													
46	546	1046	C46	.240		1.000	20.0				1.64	7.54				
47	547	1047	C47			1.125	24.0				1.89	6.52				
48	548	1048	C48			1.250	28.0				2.14	5.39				
49	549	1049	C49			1.375	31.0				2.36	4.87				
50	550	1050	C50			1.500	36.0				2.64	4.20				
51	551	1051	C51			.031	1.625				40.0	.0318	5.3	.5	2.89	3.77
52	552	1052	C52				1.750				44.0				3.15	3.43
53	553	1053	C53				1.875				47.0				3.37	3.21
54	554	1054	C54				2.000				52.0				3.65	2.90
55	555	1055	C55				2.125				56.0				3.91	2.70
56	556	1056	C56			2.250	60.0				4.16	2.52				
57	557	1057	C57			2.375	64.0				4.41	2.36				
58	558	1058	C58			2.500	68.0				4.66	2.22				
59	559		C59			1.000	17.0								1.40	19.80
60	560		C60		1.125		20.5	1.61	16.42							
61	561		C61		.037	1.250	24.0	.0235	8.7	.8	1.81	14.01				
62	562		C62			1.375	27.0				2.01	12.46				
63	563		C63			1.500	30.5				2.20	11.20				
64	564		C64			1.625	34.0				2.42	9.89				
65	565		C65			1.750	37.5				2.63	8.97				
66	566		C66			1.875	40.5				2.83	8.31				
67	567		C67			2.000	44.0				3.04	7.64				
68	568		C68			2.125	47.5				3.24	7.08				
69	569		C69			2.250	51.0				3.45	6.59				
70	570		C70			2.375	54.5				3.59	6.16				
71	571		C71			2.500	57.5				3.85	5.85				
72	572		C72			2.750	64.5				4.27	5.21				
73	573		C73			3.000	71.0				4.67	4.74				
74	574	1074	C74			1.000	15.5								1.30	34.55
75	575	1075	C75				1.125								18.5	1.48
76	576	1076	C76			1.250	21.5				1.67	24.94				
77	577	1077	C77			1.375	25.0				1.86	21.44				
78	578	1078	C78			1.500	28.0				2.04	19.15				
79	579	1079	C79			1.625	31.0				2.23	17.30				
80	580	1080	C80			1.750	34.0				2.41	15.76				
81	581	1081	C81			.041	1.875				37.0	.0194	11.4	1.0	2.59	14.48
82	582	1082	C82				2.000				40.0				2.78	13.40
83	583	1083	C83				2.125				43.0				2.96	12.47
84	584	1084	C84				2.250				46.0				3.14	11.66
85	585	1085	C85				2.375				49.0				3.33	10.94
86	586	1086	C86			2.500	52.0				3.51	10.31				
87	587	1087	C87			2.750	58.5				3.88	9.16				
88	588	1088	C88			3.000	64.5				4.25	8.31				
89	589	1089	C89			3.250	70.5				4.62	7.60				
90	590	1090	C90			3.500	76.5				4.98	7.01				

2/ SEE NOTE 7.

3/ SEE NOTE 8.

	AEROSPACE STANDARD	AS24586™ SHEET 5 OF 11	REV. D
	SPRING, HELICAL, EXTENSION FOR LOADS BELOW 30 LBF		

Steel				O.D.	d	L	N	f	P 2/	T	L ₁ 3/	R 2/				
Uncoated	Cadmium Plated	Zinc Coated	Corrosion Resisting													
Dash No.	Dash No.	Dash No.	Dash No.	Outside Dia.	Wire Dia.	Free Length	Active Coils	Defl. Per Coil	Load Lb Max	Initial Tension Lbs	Ext Max	Spring Rate Lb/in.				
91	591	1091	C91	.360	.031	1.000	12.0	.085	3.6	.3	2.02	3.24				
92	592	1092	C92			1.125	16.0				2.48	2.43				
93	593	1093	C93			1.250	20.0				2.95	1.94				
94	594	1094	C94			1.375	24.0				3.41	1.62				
95	595	1095	C95			1.500	28.0				3.81	1.43				
96	596		C96		.037	1.000	10.5	.065	5.9	.5	1.68	7.92				
97	597		C97			1.125	14.0				2.04	5.93				
98	598		C98			1.250	17.5				2.39	4.75				
99	599		C99			1.375	20.5				2.71	4.05				
100	600		C100			1.500	24.0				3.06	3.46				
101	601		C101		.041	1.625	27.5	.0555	7.9	.7	3.41	3.02				
102	602		C102			1.750	31.0				3.77	2.67				
103	603		C103			1.875	34.0				4.09	2.44				
104	604		C104			2.000	37.5				4.44	2.22				
105	605		C105			2.125	41.0				4.79	2.03				
106	606		C106		.045	2.250	44.5	.0472	10.2	.9	5.14	1.87				
107	607		C107			2.375	47.5				5.46	1.75				
108	608		C108			2.500	51.0				5.81	1.63				
109	609	1109	C109			.030	1.000				10.0	.0555	7.9	.7	1.55	12.97
110	610	1110	C110				1.125				13.0				1.85	9.99
111	611	1111	C111		1.250		16.0	2.14	8.11							
112	612	1112	C112		1.375		19.0	2.43	6.83							
113	613	1113	C113		1.500		22.0	2.72	5.90							
114	614	1114	C114		.041	1.625	25.0	.0555	7.9	.7	3.01	5.19				
115	615	1115	C115			1.750	28.0				3.30	4.63				
116	616	1116	C116			1.875	31.0				3.60	4.19				
117	617	1117	C117			2.000	34.0				3.89	3.82				
118	618	1118	C118			2.125	37.0				4.18	3.51				
119	619	1119	C119		.045	2.250	40.5	.0472	10.2	.9	4.50	3.20				
120	620	1120	C120			2.375	43.5				4.79	2.98				
121	621	1121	C121			2.500	46.5				5.08	2.79				
122	722	1122	C122			1.000	9.0				1.43	21.88				
123	623	1123	C123			1.125	12.0				1.69	16.43				
124	624	1124	C124		.045	1.250	14.5	.0472	10.2	.9	1.93	13.60				
125	625	1125	C125			1.375	17.5				2.20	11.26				
126	626	1126	C126	1.500		20.5	2.47				9.61					
127	627	1127	C127	1.625		23.0	2.71				8.56					
128	628	1128	C128	1.750		26.0	2.98				7.58					
129	629	1129	C129	.045	1.875	28.5	.0472	10.2	.9	3.22	6.91					
130	630	1130	C130		2.000	31.5				3.49	6.25					
131	631	1131	C131		2.125	34.0				3.77	5.79					
132	632	1132	C132		2.250	37.0				4.00	5.33					
133	633	1133	C133		2.375	40.0				4.26	4.92					
134	634	1134	C134	.045	2.500	42.5	.0472	10.2	.9	4.51	4.64					
135	635	1135	C135		2.750	48.0				5.02	4.10					

2/ SEE NOTE 7.
3/ SEE NOTE 8.

	AEROSPACE STANDARD	AS24586™ SHEET 6 OF 11	REV. D
	SPRING, HELICAL, EXTENSION FOR LOADS BELOW 30 LBF		

Steel				O.D.	d	L	N	f	P 2/	T	L ₁ 3/	R 2/	
Uncoated	Cadmium Plated	Zinc Coated	Corrosion Resisting										Outside Dia.
Dash No.	Dash No.	Dash No.	Dash No.										
136	636	1136	C136	.360	.045	3.000	53.5	.0472	10.2	.9	5.53	3.68	
137	637		C137				1.125	10.5				1.49	45.98
138	638		C138				1.250	12.5				1.66	38.65
139	639		C139				1.375	15.0				1.87	32.19
140	640		C140				1.500	17.0				2.06	28.42
141	641		C141				1.625	19.5				2.27	24.81
142	642		C142				1.750	21.5				2.46	22.47
143	643		C143				1.875	24.0				2.67	20.15
144	644		C144				2.000	26.5				2.87	18.24
145	645		C145				2.125	28.5				3.07	16.97
146	646		C146				2.250	31.0	.0331	17.6	1.6	3.28	15.59
147	647		C147			.055	2.375	33.0				3.47	14.65
148	648		C148				2.500	35.5				3.68	13.62
149	649		C149				2.750	40.0				4.07	12.08
150	650		C150				3.000	44.5				4.47	10.86
151	651		C151			3.250	49.0				4.87	9.86	
152	652		C152			3.500	53.5				5.27	9.03	
153	653		C153			3.750	58.0				5.67	8.33	
154	654		C154			4.000	62.5				6.10	7.73	
155	655		C155			4.250	67.0				6.47	7.21	
156	656		C156			4.500	71.5				6.81	6.76	
157	657	1157	C157	.037		1.250	10.0				2.65	2.85	
158	658	1158	C158				1.375	13.0				3.20	2.19
159	659	1159	C159			.037	1.500	16.5	.1402	4.4	.4	3.81	1.73
160	660	1160	C160				1.625	20.0				4.43	1.43
161	661	1161	C161				1.750	23.0				4.98	1.24
162	662		C162	.041		1.250	9.0				2.34	4.87	
163	663		C163				1.375	12.0				2.83	3.66
164	664		C164				1.500	15.0				3.32	2.92
165	665		C165				1.625	18.0				3.80	2.43
166	666		C166			.041	1.750	21.0	.121	5.8	.5	4.29	2.09
167	667		C167	.500		1.875	24.5				4.84	1.79	
168	668		C168				2.000	27.5				5.33	1.59
169	669		C169				2.125	30.5				5.82	1.44
170	670		C170				2.250	33.5				6.30	1.31
171	671	1171	C171				1.375	11.5				2.58	5.66
172	672	1172	C172	.045		1.500	14.0				2.94	4.65	
173	673	1173	C173				1.625	17.0				3.40	3.83
174	674	1174	C174				1.750	19.5	.1045	7.5	.7	3.79	3.34
175	675	1175	C175				1.875	22.5				4.23	2.89
176	676	1176	C176				2.000	25.0				4.61	2.60
177	677	1177	C177	.055		2.125	28.0				5.05	2.32	
178	678	1178	C178				2.250	31.0				5.49	2.10
179	679		C179				1.375	10.0	.0761	13.1	1.2	2.14	15.64
180	680		C180				1.500	12.0				2.41	13.03

2/ SEE NOTE 7.

3/ SEE NOTE 8.

	AEROSPACE STANDARD	AS24586™ SHEET 7 OF 11	REV. D
	SPRING, HELICAL, EXTENSION FOR LOADS BELOW 30 LBF		

Steel				OD	d	L	N	f	P 2/	T	L1 3/	R 2/				
Uncoated Dash No.	Cadmium Plated Dash No.	Zinc Plated Dash No.	Corrosion Resisting Dash No.													
181	681		C181			1.625	14.5				2.73	10.79				
182	682		C182			1.750	16.5				3.01	9.00				
183	683		C183			1.875	19.0				3.32	8.23				
184	684		C184			2.000	21.0				3.60	7.45				
185	685		C185			2.125	23.5				3.91	6.66				
186	686		C186			2.250	25.5				4.29	6.13				
187	687		C187			2.375	28.0				4.51	5.58				
188	688		C188			2.500	30.5				4.82	5.13				
189	689		C189			.055	2.750				35.0	.0761	13.1	1.2	5.41	4.47
190	690		C190			3.000	39.5				6.01	3.96				
191	691		C191			3.250	43.0				6.52	3.64				
192	692		C192			3.500	48.5				7.19	3.22				
193	693		C193			3.750	54.0				7.86	2.90				
194	694		C194			4.000	57.5				8.38	2.72				
195	695		C195			4.250	62.0				8.97	2.52				
196	696		C196			4.500	66.5				9.56	2.35				
197	697	1197	C197			1.375	9.0				1.92	31.26				
198	698	1198	C198			1.500	11.0				2.17	25.56				
199	699	1199	C199			1.625	13.0				2.42	21.65				
200	700	1200	C200			.500	1.750				2.66	18.75				
201	701	1201	C201			1.875	17.0				2.91	16.54				
202	702	1202	C202			2.000	19.0				3.16	14.81				
203	703	1203	C203			2.125	21.0				3.40	13.39				
204	704	1204	C204			2.250	23.0				3.65	12.23				
205	705	1205	C205			2.375	25.0				3.90	11.25				
206	706	1206	C206			.063	2.500				27.0	.0608	18.8	1.7	4.12	10.41
207	707	1207	C207			2.750	30.5				4.60	9.22				
208	708	1208	C208			3.000	34.5				5.10	8.15				
209	709	7209	C209			3.250	38.5				5.59	7.30				
210	710	1210	C210			3.500	42.5				6.08	6.62				
211	711	1211	C211			3.750	46.5				6.58	6.05				
212	712	1212	C212			4.000	50.5				7.07	5.57				
213	713	1213	C213			4.250	54.5				7.56	5.16				
214	714	1214	C214			4.750	58.5				8.06	4.81				
215	715	1215	C215			4.750	62.5				8.55	4.50				
216	716	1216	C216			5.000	66.5				9.04	4.23				
217	717		C217			2.000	15.5				4.20	4.18				
218	718		C218			2.125	18.0				4.68	3.60				
219	719		C219			2.250	20.0				5.13	3.24				
220	720		C220			.650	2.375				22.5	.142	10.1	.90	5.57	2.88
221	721		C221			2.500	24.5				5.98	2.64				
222	722		C222			2.750	29.5				6.94	2.20				
223	723		C223			3.000	34.0				7.83	1.90				
224	724		C224			3.250	38.5				8.72	1.68				
225	725		C225			3.500	43.0				9.61	1.51				

2/ SEE NOTE 7.

3/ SEE NOTE 8.

	AEROSPACE STANDARD	AS24586™ SHEET 8 OF 11	REV. D
	SPRING, HELICAL, EXTENSION FOR LOADS BELOW 30 LBF		