

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**REV. A**

**AS25018**

FEDERAL SUPPLY CLASS  
5935

**RATIONALE**


THE C1 COMMITTEE HAS RECOMMENDED STABILIZATION OF THIS DOCUMENT BASED ON NO QPL SOURCES AND NO KNOWN USAGE. ANY EDITORIAL OR TECHNICAL CHANGES NEEDED TO ALIGN THIS DOCUMENT WITH SIMILAR CURRENTLY PUBLISHED DETAIL SHEETS SHALL BE MADE AT SUCH TIME A POTENTIAL SOURCE REQUESTS AUTHORIZATION TO QUALIFY TO THIS DOCUMENT.

**STABILIZED NOTICE**

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8C1 CONNECTORS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as25018a

**SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS25018A>**




CUSTODIAN: AE-8/AE-8C1		PROCUREMENT SPECIFICATION: AS81790	
	<b>AEROSPACE STANDARD</b>		<b>AS25018</b>
	CONNECTOR, RECEPTACLE EXTERNAL ELECTRIC POWER, AIRCRAFT, 28 VOLT DC, JET STARTING		

ISSUED 2009-10 STABILIZED 2014-11

NOTICE

THE REQUIREMENTS FOR PROCURING THE CONNECTOR DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF: SAE AS81790

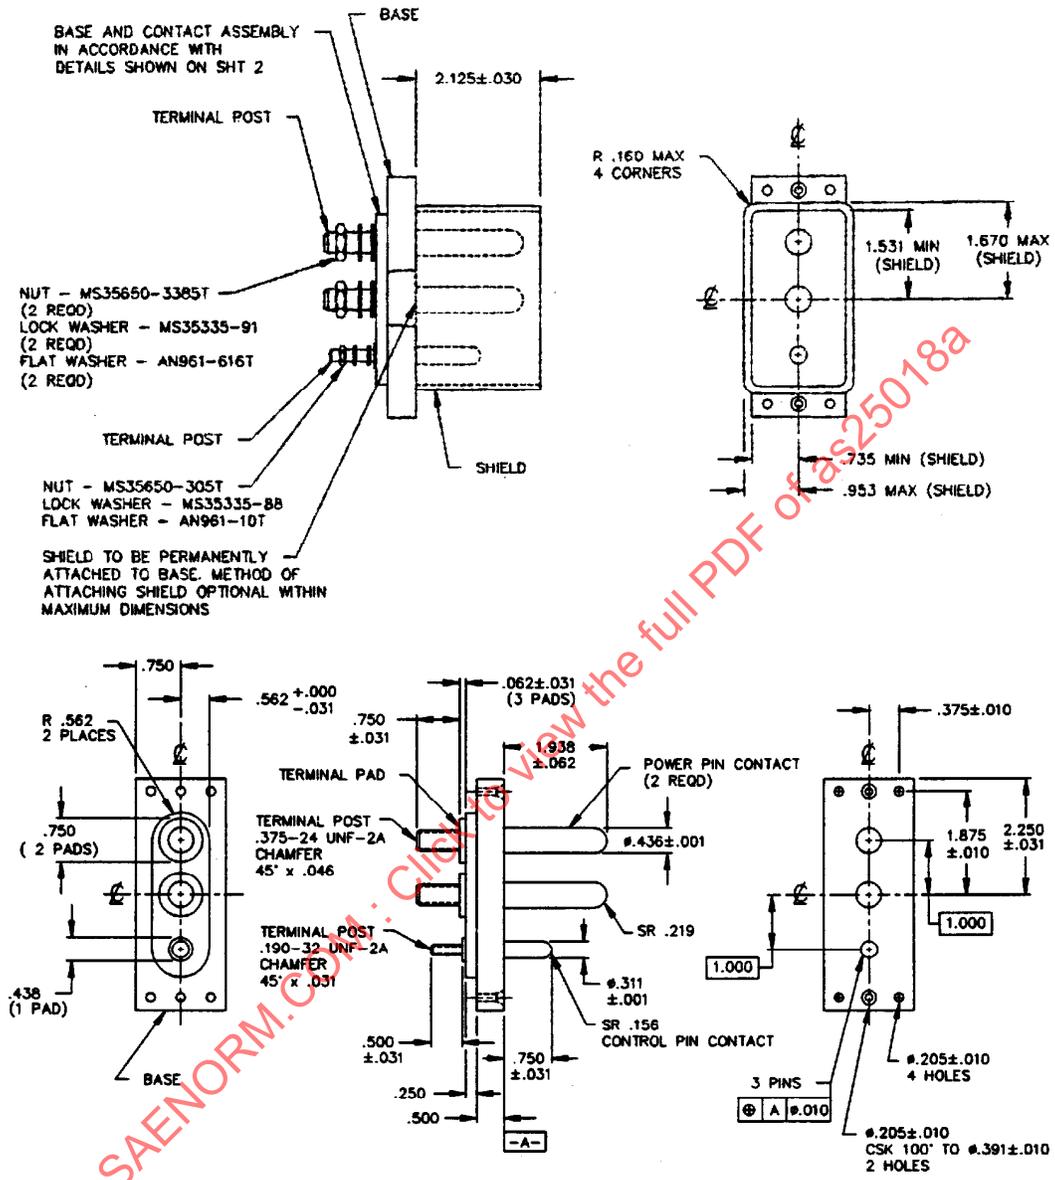

DETAILS OF BASE & CONTACT ASSEMBLY

FIGURE 1- AS25018 CONNECTOR RECEPTACLE DETAILS

	<b>AEROSPACE STANDARD</b>	<b>AS25018</b> SHEET 1 OF 2	<b>REV.</b> A
	CONNECTOR, RECEPTACLE EXTERNAL ELECTRIC POWER, AIRCRAFT, 28 VOLT DC, JET STARTING		