

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**REV. C**  
**AS25019™**

FEDERAL SUPPLY CLASS  
6150

**RATIONALE**


AS25019 IS BEING STABILIZED BECAUSE THE PROCESSES/PRODUCT IS CONSIDERED MATURE AND THE COMMITTEE DOES NOT ANTICIPATE FUTURE TECHNICAL CHANGES. STABILIZATION DOES NOT IMPLY THE PROCESS OR PRODUCT IS UNACCEPTABLE FOR APPLICATIONS FOR WHICH IT IS DESIGNED. ANY TECHNICAL CHANGES NOTED BY A SUPPLIER OR USER WHICH RESULTS IN A PRODUCT OR REQUIREMENT CHANGE WILL BE ADDRESSED BY A NEW REVISION. THE COMPONENTS ARE USED FOR REPLACEMENT ONLY. A QUALIFIED SUPPLIER IS STILL MAINTAINED.

**STABILIZED NOTICE**

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE AE-8A ELEC WIRING AND FIBER OPTIC INTERCONNECT SYS INSTALL COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

SAENORM.COM : Click to view the full PDF of as25019c

**For more information on this standard, visit**  
<https://www.sae.org/standards/content/AS25019C/>

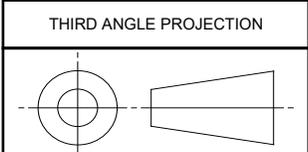

CUSTODIAN: AE-8/AE-8A		PROCUREMENT SPECIFICATION: AS7974	
	<b>AEROSPACE STANDARD</b>		<b>AS25019™</b>
	CABLE ASSEMBLY, EXTERNAL ELECTRIC POWER, AIRCRAFT, 28 VOLT DC, JET STARTING		

ISSUED 1999-07 REAFFIRMED 2005-11 REVISED 2022-05 STABILIZED 2022-08

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF AS7974.

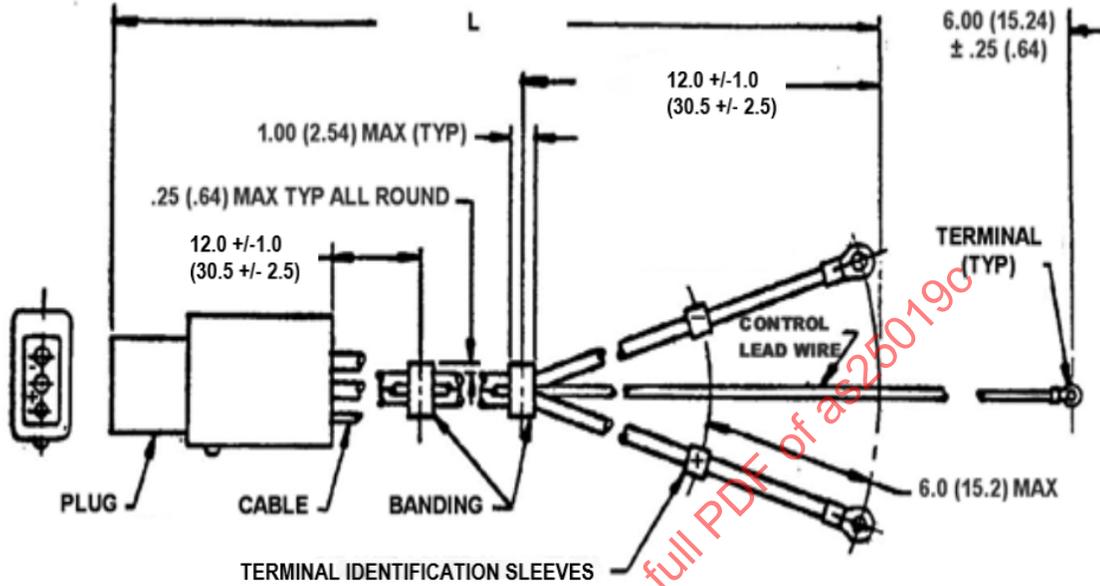


FIGURE 1 - AS25019 CABLE ASSEMBLY

TABLE 1 - AS25019 CABLE ASSEMBLY DIMENSIONS

PART NUMBER MS25019-	CABLE SIZE (+, -) 1/	CONTROL LEAD WIRE SIZE	L ± .5 (FEET)	L ± 0.15 M
20	0000	8	20	6.10
30			30	9.14
40			40	12.19
60			60	18.29
80			80	24.36
100			100	30.48

1/ CABLE TERMINAL IS MS20659-160 FOR NEGATIVE TERMINAL LUG AND MS20659-123 FOR POSITIVE TERMINAL LUG

2/ CONTROL LEAD WIRE TERMINAL IS MS20659-107.

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS7974.

1. CONFIGURATION:

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.25 (0.64 CM). METRIC DIMENSIONS ARE BASED ON 2.54 CM/IN. ENGLISH UNITS TAKE PRECEDENCE OVER METRIC UNITS IN THE EVENT OF A CONFLICT.

CABLE ASSEMBLY CONFIGURATION AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH FIGURE 1, TABLE 1, AND AS7974.

PLUG AND SOCKET CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH AS25487 (SEE TABLE 3). THE PLUG, SPECIFIED BY THE PART IDENTIFICATION NUMBER (PIN), SHALL BE MOLDED OR ATTACHED TO THE CABLES (SEE APPLICATION NOTES).

CABLE AND CONTROL LEAD WIRE SHALL BE IN ACCORDANCE WITH AS5756/2.

TERMINALS SHALL BE IN ACCORDANCE WITH AS20659 (SEE TABLE 1 NOTE 1 AND 2).

CIRCUIT CONTROL IDENTIFICATION SLEEVE (SEE FIGURE 1) SHALL BE IN ACCORDANCE WITH AS7974.

2. MATERIAL:


PLUG MATERIAL SHALL BE IN ACCORDANCE WITH AS25487.

BAND MATERIAL SHALL BE IN ACCORDANCE WITH AS7974.

CABLE AND CONTROL LEAD WIRE MATERIALS SHALL BE IN ACCORDANCE WITH AS5756/2.

3. PART IDENTIFICATION NUMBER (PIN):

AS25019 CABLE ASSEMBLY PIN SHALL BE AS FOLLOWS (SEE APPLICATION NOTES):



4. IDENTIFICATION MARKING REQUIREMENT AND LOCATION:

THE MARKING REQUIREMENTS AND LOCATIONS SHALL BE IN ACCORDANCE WITH AS7974. PLUG MARKING SHALL INCLUDE THE PIN AND SUPPLIER IDENTIFICATION OR CAGE CODE.

5. CRIMP TOOLS:

TERMINAL SHALL BE CRIMPED WITH TOOLS SPECIFIED IN TABLE 2.

TABLE 2 - CRIMP TOOLS

TERMINAL SIZE	CRIMP TOOL	WIRE CONDUCTOR CRIMP DIE	
		FORM	INDENT
8	MS25441-01 (1/, 2/, 3/)	MS90485-8	N/A
	M5259/3-01		
0000	M5259/4-01	M5259/7-001	M5259/7-010
	M5259/5-01	MS90485-04	N/A

1/ REFER TO AS5259/1 FOR TOOL DETAILS AND AS5259/7 FOR DIE DETAILS.

2/ TOOL REQUIRES AS5259/2 HYDRAULIC HOSE AND PUMP.

3/ AN EQUIVALENT MS25441 AND MS90485 DIE APPROVED BY THE QUALIFYING ACTIVITY MAY BE USED ONLY FOR THE INITIAL CABLE ASSEMBLY PURCHASES FOR THE UNITED STATES MILITARY.

APPLICATION NOTES:

- CABLES ASSEMBLIES SHALL BE INTEGRALLY MOLDED CABLE ASSEMBLIES FOR UNITED STATES AIR FORCE ORIGINAL APPLICATION. THE AS25487 UNMOLDED ATTACHABLE PLUG SHALL BE LIMITED TO REPLACEMENT OF ORIGINAL MOLDED CABLE ASSEMBLY DAMAGED IN SERVICE.
- THE AS25487 MOLDED OR UNMOLDED ATTACHABLE PLUG MAY BE FOR THE UNITED STATES NAVY APPLICATIONS.

	<b>AEROSPACE STANDARD</b>	<b>AS25019™</b> SHEET 2 OF 3	<b>REV.</b> <b>C</b>
	CABLE ASSEMBLY, EXTERNAL ELECTRIC POWER, AIRCRAFT, 28 VOLT DC, JET STARTING		