
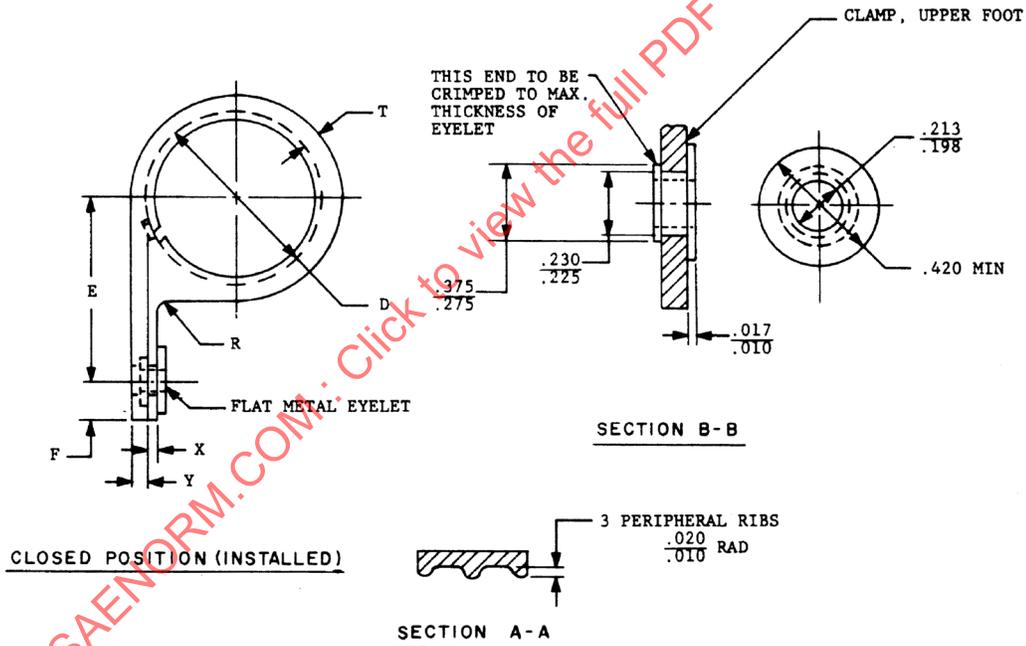


REV. A

AS25281

FEDERAL SUPPLY CLASS
5340

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

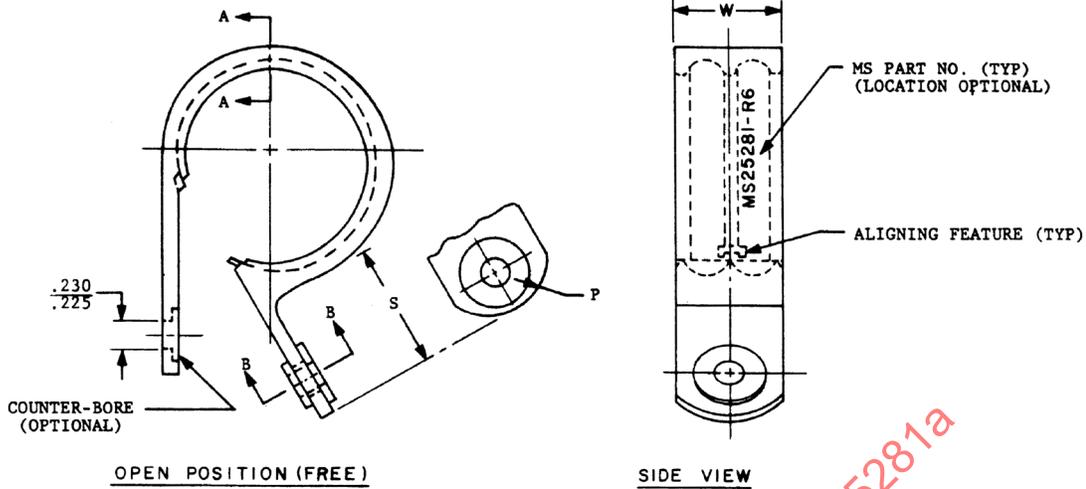

STYLE R-RIBBED INNER DIAMETER



THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: MIL-S-23190



AEROSPACE STANDARD

CLAMP, LOOP, PLASTIC, WIRE SUPPORT

AS25281
SHEET 1 OF 5

REV. A

Copyright 2005 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790

Tel: 724-776-4970 (outside USA) Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1998-07 REAFFIRMED 2003-10 REVISED 2005-01

REV.
A

AS25281

TABLE I. FOR STYLE R-RIBBED INNER DIAMETER CLAMPS ONLY


DASH NO.	APPROX. CABLE BUNDLE DIA+1/64	D** ± .020	E ± .025	F	P MIN RADIUS	R +.005 RADIUS	S ± .010	T		W		X		Y	
								MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
-2	1/8	.125	.440												
-3	3/16	.188	.485					.038	.075					.060	
-4	1/4	.250	.510	.260											
-5	5/16	.312	.546	.240	.250		.540			.510				.100	
-6	3/8	.375	.578			.062									
-7	7/16	.438	.608									.080			
-8	1/2	.500	.639									.060			
-9	9/16	.562	.675												
-10	5/8	.625	.706												
-11	11/16	.688	.785											.085	
-12	3/4	.750	.816					.050	.085						
-13	13/16	.812	.827												
-14	7/8	.875	.878												
-15	15/16	.938	.910							.495					
-16	1.000	1.000	.941												
-17	1-1/16	1.063	.972												
-18	1-1/8	1.125	.983												
-19*	1-3/16	1.188	1.024	.330	.300		.605			.610				.130	
-20	1-1/4	1.250	1.066	.240											
-21*	1-5/16	1.312	1.070			.109									
-22	1-3/8	1.375	1.110									.130			
-23*	1-7/16	1.438	1.140												
-24	1-1/2	1.500	1.170												
-25*	1-9/16	1.562	1.200					.080	.160			.085		.120	
-26	1-5/8	1.625	1.250												
-27*	1-11/16	1.688	1.270												
-28	1-3/4	1.750	1.300												
-29*	1-13/16	1.812	1.330												
-30	1-7/8	1.875	1.355												
-31*	1-15/16	1.938	1.390												
-32	2.000	2.000	1.420												

*SEE NOTE 8.


**"D" DIMENSION TO BE MEASURED MINUS THE RIBS.

REV.
A


AS25281

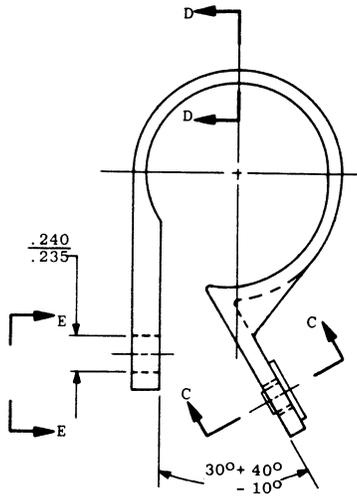

OPEN POSITION (FREE)

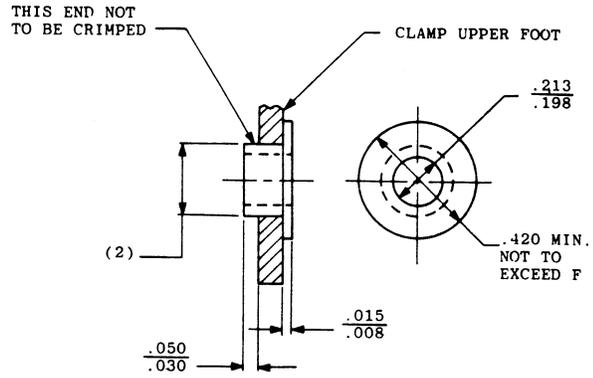


SECTION C-C

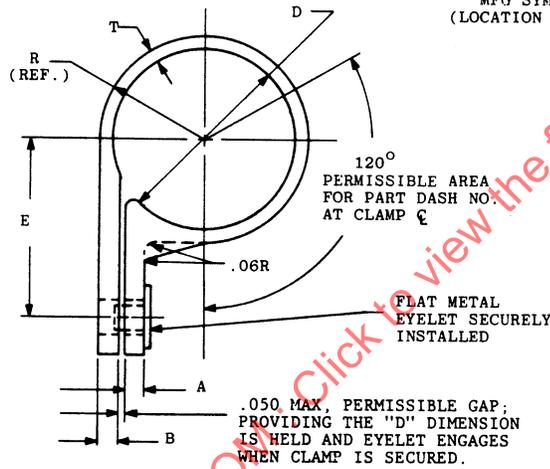

CLOSED POSITION (INSTALLED)


MFG SYMBOL
(LOCATION APPROX)

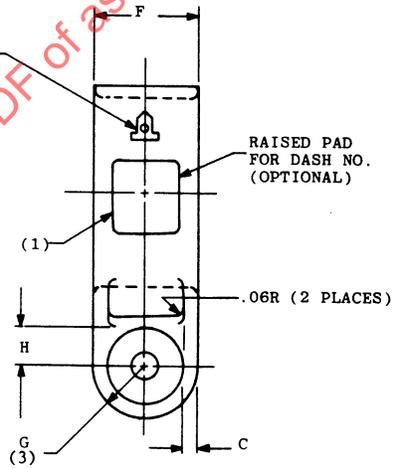

SIDE VIEW



SECTION D-D

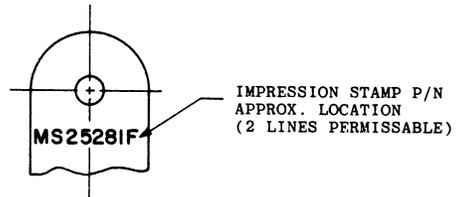

PARTIAL VIEW E-E
ROTATED 180°

STYLE F - FLAT INNER DIAMETER

REV.
A

AS25281

TABLE II. FOR STYLE F - FLAT INNER DIAMETER ONLY

DASH NO.	APPROX. CABLE BUNDLE DIA+1/64	A +.010 -.005	B +.010 -.005	C +.010 -.005	D ±.020	E ±.025	F ±.015	G RADIUS	H ±.015	R REF	S ±.010	T +.010 -.005				
2	1/8	.065	.065	.060	.125	.457	.500	.250	.240	.102	.020R	.040				
3	3/16				.187	.498				.133						
4	1/4				.250	.529				.165						
5	5/16		.095		.095	.312				.560	.600	.300	.220	.206	.030R	.073
6	3/8					.375				.592				.250		
7	7/16					.437				.623				.281		
8	1/2					.500				.654				.312		
9	9/16		.125		.125	.090				.562	.752	.600	.300	.220	.343	.082
10	5/8									.625	.783				.385	
11	11/16	.687		.814			.415									
12	3/4	.750		.845			.447									
13	13/16	.812		.877			.478									
14	7/8	.875		.908			.509									
15	15/16	.937		.939			.540									
16	1.000	1.000		.970			.572									
17	1-1/16	.125	.125	.090	1.062	1.002	.600	.300	.220	.603	.073					
18	1-1/8				1.125	1.062				.643						
19	1-3/16				1.187	1.093				.665						
20	1-1/4				1.250	1.124				.697						

- (1) DASH NO. SIZES: 12PT THRU -4; 24 PT FOR SIZES -5 THRU -20, RAISED NUMERALS.
(2) MFG. OPTION OF SIZE TO ASSURE SNUG-FIT TO EYELET.
(3) "G" RADIUS TO BE TANGENT TO "F".

INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm
.005	0.13	.1875	4.76	.509	12.93	.785	19.94	1.125	28.58
.008	0.20	.188	4.78	.510	12.95	.812	20.62	1.140	28.96
.010	0.25	.198	5.03	.529	13.44	.8125	20.64	1.170	29.72
.015	0.38	.206	5.23	.540	13.72	.814	20.68	1.187	30.15
.0156	0.40	.213	5.41	.546	13.87	.816	20.73	1.1875	30.16
.020	0.51	.220	5.59	.560	14.22	.827	21.01	1.188	30.18
.025	0.64	.235	5.97	.562	14.27	.845	21.46	1.200	30.48
.030	0.76	.240	6.10	.5625	14.29	.875	22.23	1.250	31.75
.038	0.97	.250	6.35	.572	14.53	.877	22.28	1.270	32.26
.040	1.02	.260	6.60	.578	14.68	.878	22.30	1.300	33.02
.050	1.27	.281	7.14	.592	15.04	.908	23.06	1.312	33.32
.060	1.52	.300	7.62	.600	15.24	.910	23.11	1.3125	33.34
.062	1.57	.312	7.92	.603	15.32	.937	23.80	1.330	33.78
.065	1.65	.3125	7.94	.605	15.37	.9375	23.81	1.355	34.41
.073	1.85	.330	8.38	.608	15.44	.938	23.83	1.375	34.93
.075	1.91	.343	8.71	.610	15.49	.939	23.85	1.390	35.31
.080	2.03	.375	9.53	.623	15.82	.941	23.90	1.420	36.07
.082	2.08	.385	9.78	.625	15.88	.970	24.64	1.4375	36.51
.085	2.16	.415	10.54	.639	16.23	.972	24.69	1.438	36.53
.090	2.29	.420	10.67	.643	16.33	.983	24.97	1.500	38.10
.095	2.41	.437	11.10	.654	16.61	1.000	25.40	1.562	39.67
.100	2.54	.4375	11.11	.665	16.89	1.002	25.45	1.625	41.28
.102	2.59	.438	11.12	.675	17.15	1.024	26.01	1.6875	42.86
.109	2.77	.440	11.18	.687	17.45	1.062	26.97	1.688	42.88
.120	3.05	.447	11.35	.6875	17.46	1.0625	26.99	1.750	44.45
.125	3.18	.457	11.61	.688	17.48	1.063	27.00	1.812	46.02
.130	3.30	.478	12.14	.697	17.70	1.066	27.08	1.8125	46.04
.133	3.38	.485	12.32	.706	19.73	1.070	27.18	1.875	47.63
.160	4.06	.495	12.57	.750	19.05	1.043	27.76	1.9375	49.21
.165	4.19	.498	12.65	.752	19.10	1.110	28.19	1.938	49.22
.187	4.75	.500	12.70	.783	19.89	1.124	28.55	2.000	50.80