

**REV.
A****AS27649**

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS27649D AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS27649D. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as27649a

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1998-04 REVISED 1998-11

PREPARED BY AIRFRAME CONTROL BEARINGS GROUP

PROCUREMENT SPECIFICATION: MIL-B-7949

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD


BEARING, BALL, AIRFRAME,
ANTIFRICTION, INTERMEDIATE DUTY

AS27649
SHEET 1 OF 3

**REV.
A**

REV.
A

AS27649

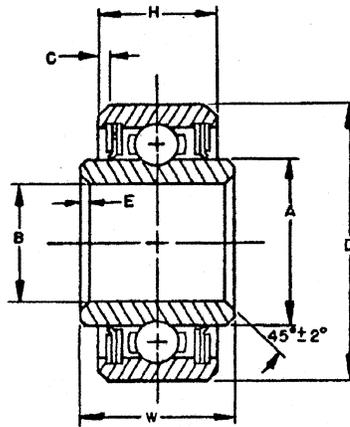

DIMENSIONS IN INCHES

MS DASH NO.	REF. PART NO.	B BORE (a)	D OUTSIDE DIAMETER (a)	W WIDTH INNER RING	H WIDTH OUTER RING	A SHOULDER DIAMETER INNER RING (APPROX.)	E CORNER CHAMFER X 45°		C RADIAL THRUST LIMIT LOAD (f) RATING	RADIAL THRUST LIMIT LOAD (f) RATING	RADIAL LOAD RATING (LBS.) FOR AVERAGE LIFE OF 10,000 COMPLETE (E) 90° CYCLES		WEIGHT POUNDS (APPROX)
							INNER RING BORE	OUTER RING O.D.			(d) CASE I	(d) CASE II	
-3	AW3AK	.1900	.6250	.406	.312	.317	.005	.016	450	210	440	440	.018
-4	AW4AK	.2500	.7500	.438	.312	.415	.005	.016	525	250	510	510	.028
-5	AW5AK	.3125	.8125	.469	.344	.462	.015	.016	820	380	800	800	.033
-6	AW6AK	.3750	.8750	.469	.344	.520	.015	.016	820	380	800	800	.034
-8	AW8AK	.5000	1.1250	.562	.438	.681	.015	.016	1350	630	1310	1310	.075
-10	AW10AK	.6250	1.3750	.594	.469	.848	.015	.032	1840	860	1790	1790	.119
-12	AW12AK	.7500	1.6250	.656	.531	1.052	.015	.032	2400	1120	2340	2340	.189
-16	AW16AK	1.0000	2.0000	.688	.562	1.334	.015	.032	3000	1400	2920	2920	.296
-20	AW20AK	1.2500	2.2500	.688	.562	1.615	.015	.032	3600	1680	3500	3270	.355

(a) OUT OF ROUND TOLERANCES, BORE: +.0002, -.0007
OUTER DIA.: +.0005, -.0010

(b) A RADIUS GIVING APPROXIMATELY THE SAME GRIP FOR STAKING THE BEARING IN THE HOUSING WILL BE ACCEPTABLE.

(c) A RADIUS GIVING APPROXIMATELY THE SAME FILLET CLEARANCE WILL BE ACCEPTABLE.

(d) CASE I - LOAD FIXED WITH RESPECT TO OUTER RACE.

CASE II - LOAD FIXED WITH RESPECT TO INNER RACE.

(e) THESE RATINGS ARE FOR OPERATION UP TO 250°F MAX. WHEN SUBJECT TO OPERATION UP TO 350°F, THE RATINGS SHALL BE REDUCED BY 20%.

NOTES:

- ① 1. MATERIALS: RINGS: AISI 440C, CORROSION RESISTANT STEEL
BALLS: AISI 440C, CORROSION RESISTANT STEEL
2. SEALS: POLYTETRAFLUOROETHYLENE PER AMS3652 OR POLYTETRAFLUOROETHYLENE SHEET, GLASS FABRIC REINFORCED AMS3666.
3. SEAL RETAINERS: STEEL, CORROSION RESISTANT
4. LUBRICANT: MIL-G-81322 OR MIL-G-23827. MIL-G-81322 SHALL BE USED FOR OPERATION ABOVE 250°F. ALL BEARINGS SHALL BE PREPACKED WITH GREASE CONFORMING TO MIL-G-81322 UNLESS OTHERWISE SPECIFIED. IF MIL-G-23827 IS REQUIRED, ADD THE LETTER G AFTER THE MS PART NUMBER. BEARINGS SHALL BE FILLED 80% MINIMUM.
5. HARDNESS: HEAT TREAT RINGS AND BALLS TO ROCKWELL "C" 57 TO 63 AND STABILIZED FOR OPERATION AT 250°F.
6. SURFACE ROUGHNESS: RACEWAYS AND BALLS - 8 MICROINCHES AA PER ANSI B46.1.