

REV.
C


AS3073

FEDERAL SUPPLY CLASS
4730

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

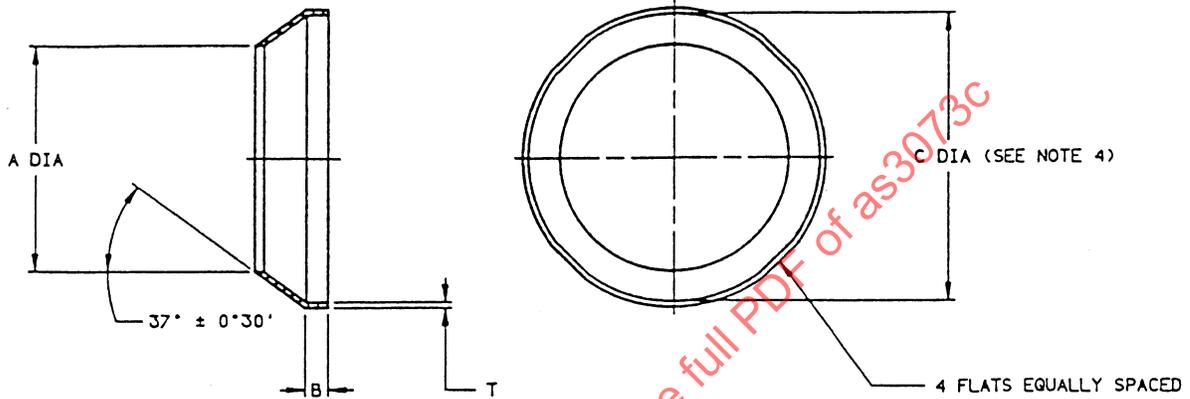

INACTIVE - See Note 9.

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

GASKET - 37° FLARED TUBE FITTING,
COPPER, AMS 4500

AS3073
SHEET 1 OF 3

REV.
C

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1974-04 REVISED 1997-11 NONCURRENT 1998-02 REAFFIRMED NONCURRENT 2007-06

AS3073

REV. C

AS IDENT NUMBER	NOM TUBE OD in	NOM TUBE OD (mm)	A DIA in	A DIA (mm)	B in	B (mm)	C DIA in	C DIA (mm)	T in	T (mm)	APPROX MASS lb PER 100	APPROX MASS kg PER 100	VENDOR NUMBER
AS3073-02	0.125	3.18	0.103-0.118	2.62- 2.99	0.045-0.060	1.15-1.52	0.245-0.250	6.23- 6.35	0.004-0.006	0.102-0.152	0.017	0.008	VSF1015C2B
AS3073-03	0.188	4.78	0.166-0.181	4.22- 4.59	0.045-0.060	1.15-1.52	0.307-0.312	7.80- 7.92	0.004-0.006	0.102-0.152	0.021	0.010	VSF1015C3B
AS3073-04	0.250	6.35	0.213-0.228	5.42- 5.79	0.060-0.075	1.53-1.90	0.359-0.364	9.12- 9.24	0.004-0.006	0.102-0.152	0.028	0.013	VSF1015C4B
AS3073-05	0.312	7.92	0.275-0.290	6.99- 7.36	0.060-0.075	1.53-1.90	0.421-0.426	10.70-10.82	0.004-0.006	0.102-0.152	0.035	0.016	VSF1015C5B
AS3073-06	0.375	9.52	0.338-0.353	8.59- 8.96	0.060-0.075	1.53-1.90	0.476-0.481	12.10-12.21	0.004-0.006	0.102-0.152	0.040	0.018	VSF1015C6B
AS3073-07	0.438	11.13	0.401-0.416	10.19-10.56	0.060-0.075	1.53-1.90	0.539-0.544	13.70-13.81	0.004-0.006	0.102-0.152	0.088	0.040	VSF1015C7B
AS3073-08	0.500	12.70	0.446-0.461	11.33-11.70	0.080-0.095	2.04-2.41	0.654-0.659	16.62-16.73	0.009-0.011	0.229-0.279	0.151	0.069	VSF1015C8B
AS3073-09	0.562	14.27	0.529-0.544	13.44-13.81	0.080-0.095	2.04-2.41	0.722-0.727	18.34-18.46	0.009-0.011	0.229-0.279	0.171	0.078	VSF1015C9B
AS3073-10	0.625	15.88	0.562-0.577	14.28-14.65	0.090-0.105	2.29-2.66	0.767-0.772	19.49-19.60	0.009-0.011	0.229-0.279	0.181	0.082	VSF1015C10B
AS3073-11	0.688	17.48	0.625-0.640	15.88-16.25	0.090-0.105	2.29-2.66	0.882-0.887	22.41-22.52	0.009-0.011	0.229-0.279	0.229	0.104	VSF1015C11B
AS3073-12	0.750	19.05	0.687-0.702	17.45-17.83	0.090-0.105	2.29-2.66	0.938-0.943	23.83-23.95	0.009-0.011	0.229-0.279	0.283	0.128	VSF1015C12B
AS3073-14	0.875	22.22	0.826-0.841	20.99-21.36	0.090-0.105	2.29-2.66	1.070-1.075	27.18-27.30	0.009-0.011	0.229-0.279	0.303	0.138	VSF1015C14B
AS3073-16	1.000	25.40	0.936-0.951	23.78-24.15	0.110-0.125	2.80-3.17	1.188-1.193	30.18-30.30	0.009-0.011	0.229-0.279	0.362	0.164	VSF1015C16B
AS3073-18	1.125	28.58	1.046-1.061	26.57-26.94	0.060-0.075	1.53-1.90	1.375-1.380	34.93-35.05	0.009-0.011	0.229-0.279	0.457	0.207	VSF1015C18B
AS3073-20	1.250	31.75	1.175-1.190	29.85-30.22	0.110-0.125	2.80-3.17	1.501-1.506	38.13-38.25	0.009-0.011	0.229-0.279	0.546	0.248	VSF1015C20B
AS3073-24	1.500	38.10	1.410-1.425	35.82-36.19	0.110-0.125	2.80-3.17	1.750-1.755	44.45-44.57	0.009-0.011	0.229-0.279	0.662	0.301	VSF1015C24B
AS3073-28	1.750	44.45	1.680-1.695	42.68-43.05	0.110-0.125	2.80-3.17	2.125-2.130	53.98-54.10	0.009-0.011	0.229-0.279	0.982	0.446	VSF1015C28B
AS3073-32	2.000	50.80	1.913-1.928	48.60-48.97	0.110-0.125	2.80-3.17	2.375-2.380	60.33-60.45	0.009-0.011	0.229-0.279	1.068	0.485	VSF1015C32B