

RATIONALE

REVISE THREAD TO THREAD AND THREAD TO SHANK POSITIONAL TOLERANCES, RELOCATE KEY DIMENSIONS FOR CLARITY. CORRECT ERROR IN A DIM FOR -14 IN TABLE 1. FIGURE 1 REDRAWN AND GENERAL EDITORIAL UPDATE.

REV.
B

AS3089™

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE invites your written comments and suggestions. SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE reaffirms 2006-07 and 1975-05

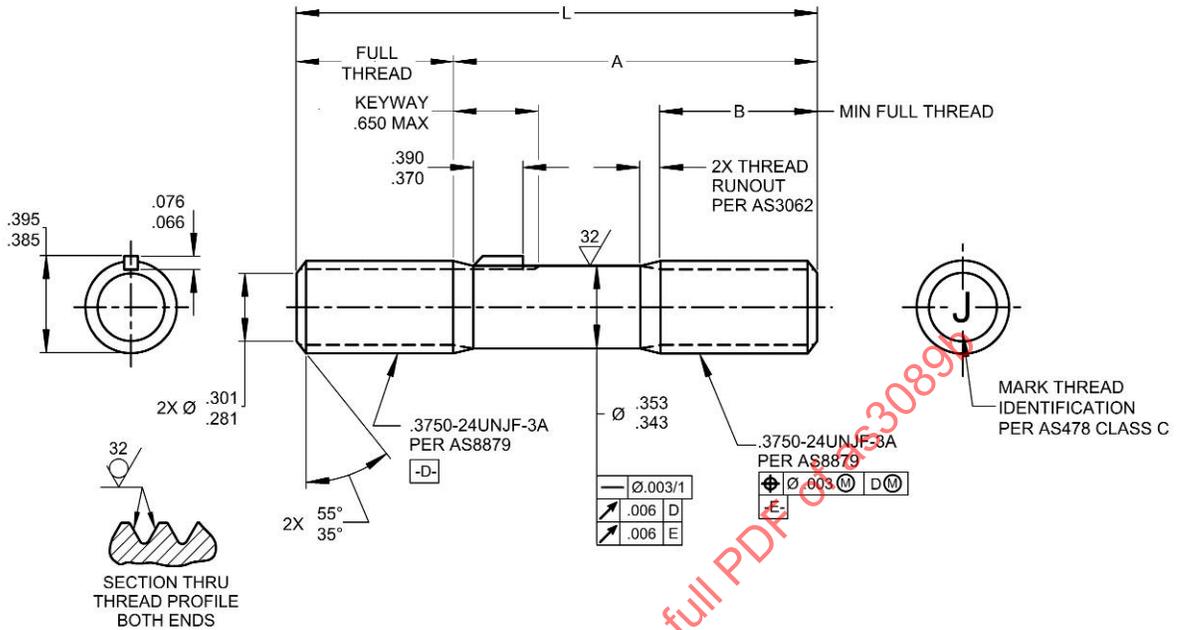



FIGURE 1 - STUD

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBERS	L	A	B MIN /a/	APPROX MASS LB/100
AS3089-01	1.428 - 1.448	.678 - .698	.562	3.88
AS3089-02	1.490 - 1.510	.740 - .760	.625	4.04
AS3089-03	1.552 - 1.572	.802 - .822	.688	4.21
AS3089-04	1.615 - 1.635	.865 - .885	.688	4.38
AS3089-05	1.678 - 1.698	.928 - .948	.688	4.55
AS3089-06	1.740 - 1.760	.990 - 1.010	.688	4.72
AS3089-07	1.802 - 1.822	1.052 - 1.072	.688	4.89
AS3089-08	1.834 - 1.854	1.083 - 1.103	.812	4.97
AS3089-09	1.865 - 1.885	1.115 - 1.135	.688	5.06
AS3089-10	1.928 - 1.948	1.178 - 1.198	.812	5.22
AS3089-11	1.990 - 2.010	1.240 - 1.260	.688	5.39
AS3089-12	2.052 - 2.072	1.302 - 1.322	.688	5.56

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3089B>

THIRD ANGLE PROJECTION

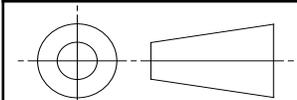

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7452 /4/



AEROSPACE STANDARD

STUD, STRAIGHT, KEY LOCKED,
CADMIUM PLATED, STEEL, UNS G87400
.3750-24 UNJF-3A X .3750-24 UNJF-3A

AS3089™
SHEET 1 OF 3

REV.
B

TABLE 1 - PART NUMBERS AND DIMENSIONS (CONTINUED)

PART NUMBERS	L	A	B MIN /a/	APPROX MASS LB/100
AS3089-13	2.115 - 2.135	1.365 - 1.385	.688	5.73
AS3089-14	2.178 - 2.198	1.428 - 1.448	.688	5.90
AS3089-15	2.240 - 2.260	1.490 - 1.510	.688	6.07
AS3089-16	2.302 - 2.322	1.552 - 1.572	.688	6.23
AS3089-17	2.365 - 2.385	1.615 - 1.635	.688	6.40
AS3089-18	2.428 - 2.448	1.678 - 1.698	.688	6.57
AS3087-19	2.490 - 2.510	1.740 - 1.760	.688	6.74
AS3089-20	2.615 - 2.635	1.865 - 1.885	.688	7.08
AS3089-21	2.740 - 2.760	1.990 - 2.010	.688	7.41
AS3089-22	2.865 - 2.885	2.115 - 2.135	.688	7.75
AS3089-23	2.990 - 3.010	2.240 - 2.260	.688	8.09
AS3089-24	3.115 - 3.135	2.365 - 2.385	.688	8.42
AS3089-25	3.240 - 3.260	2.490 - 2.510	.688	8.76
AS3089-26	3.365 - 3.385	2.615 - 2.635	.688	9.10
AS3089-27	3.490 - 3.510	2.740 - 2.760	.688	9.44
AS3089-28	3.615 - 3.635	2.865 - 2.885	.688	9.77
AS3089-29	3.740 - 3.760	2.990 - 3.010	.688	10.11
AS3089-30	3.865 - 3.885	3.115 - 3.135	.688	10.45
AS3089-31	3.990 - 4.010	3.240 - 3.260	.688	10.78
AS3089-32	4.115 - 4.135	3.365 - 3.385	.688	11.12
AS3089-33	4.240 - 4.260	3.490 - 3.510	.688	11.46
AS3089-34	4.365 - 4.385	3.615 - 3.635	.688	11.79
AS3089-35	4.490 - 4.510	3.740 - 3.760	.688	12.13
AS3089-36	4.615 - 4.635	3.865 - 3.885	.688	12.47
AS3089-37	4.740 - 4.760	3.990 - 4.010	.688	12.81
AS3089-38	4.865 - 4.885	4.115 - 4.135	.688	13.14

/a/ DIMENSION "B" FOR -08 AND -10 MEETS THE REQUIREMENTS OF AND20002, AND20004, AND20006, AND20007.

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

- MATERIAL: STUD - LOW ALLOY STEEL PER AMS6322 (UNS G87400).
KEY - CORROSION RESISTANT STEEL PER AMS5688 (UNS S30500).
- HARDNESS: STUD - 26-32 HRC
KEY - AS RECEIVED.
- FINISH: STUD - CADMIUM PLATE PER AMS2400. DIMENSIONS ARE AFTER PLATING.
KEY - NONE.

/4/ PROCUREMENT SPECIFICATION: AS7452. REQUIREMENTS RELATED TO BOLT HEADS ARE NOT APPLICABLE.

5. MAGNETIC PARTICLE INSPECTION PER ASTM E1444/E1444M.

6. THE INSTALLED STUD SHALL HAVE A MINIMUM RESISTANCE TO TORQUE OUT OF 240 LBF-IN.

7. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra.

	AEROSPACE STANDARD	AS3089™ SHEET 2 OF 3	REV. B
	STUD, STRAIGHT, KEY LOCKED, CADMIUM PLATED, STEEL, UNS G87400 .3750-24 UNJF-3A X .3750-24 UNJF-3A		