

RATIONALE

FIGURE REDRAWN, THREAD SPEC UPDATED, OPTIONAL SHAPE FOR LIGHTENING HOLE ADDED TABLE RETYPED TO REMOVE DUAL DIMENSIONING, NOTES BROUGHT UP TO DATE

REV.
A

AS3116

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


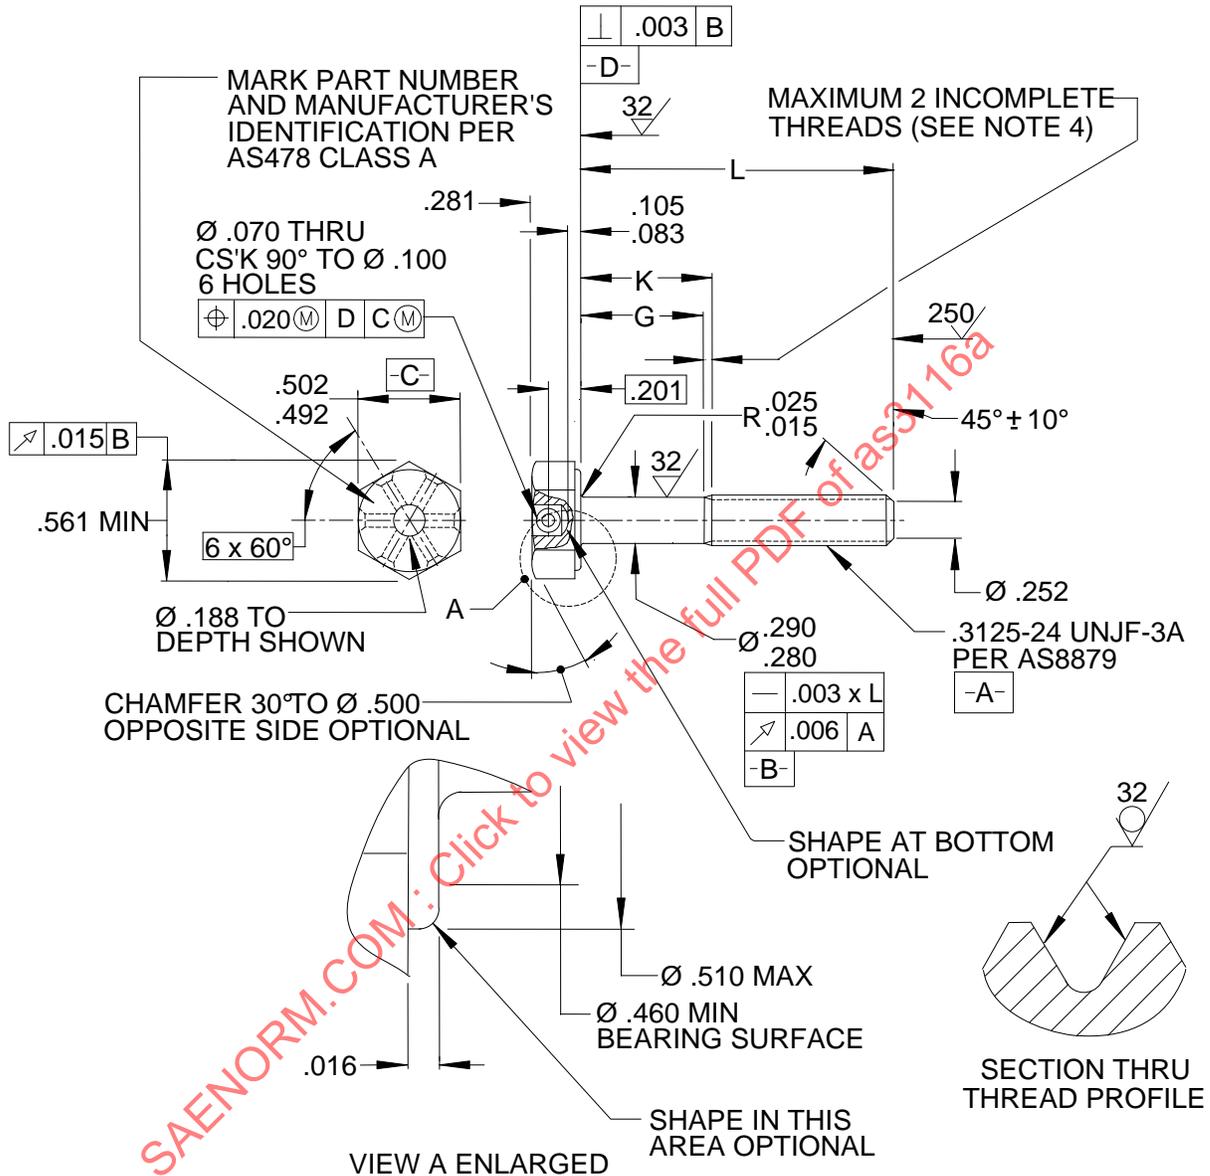


FIGURE 1

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3116a>

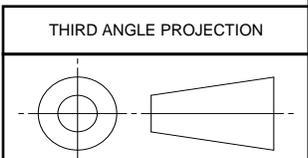

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7477



AEROSPACE STANDARD

(R) BOLT, MACHINE - HEXAGON HEAD, DRILLED 6 HOLES, PD SHANK, AMS5731, UNS S66286, .3125-24 UNJF-3A

AS3116
SHEET 1 OF 3

REV.
A

ISSUED 1979-07 REAFFIRMED 2006-05 REVISED 2014-03

TABLE 1 - DIMENSIONS

PART NUMBER /1/	L	G MIN	K MAx	APPROX MASS LB/100
AS3116 -13	1.062	.044	.188	3.43
AS3116 -14	1.125	.107	.250	3.54
AS3116 -15	1.188	.170	.312	3.66
AS3116 -16	1.250	.232	.375	3.77
AS3116 -17	1.312	.295	.438	3.88
AS3116 -18	1.375	.357	.500	4.00
AS3116 -19	1.438	.420	.562	4.11
AS3116 -20	1.500	.482	.625	4.23
AS3116 -21	1.562	.544	.688	4.34
AS3116 -22	1.625	.607	.750	4.46
AS3116 -23	1.688	.670	.812	4.57
AS3116 -24	1.750	.732	.875	4.69
AS3116 -25	1.812	.794	.938	4.80
AS3116 -26	1.875	.857	1.000	4.91
AS3116 -27	1.938	.920	1.062	5.03
AS3116 -28	2.000	.982	1.125	5.14
AS3116 -29	2.125	1.107	1.250	5.37
AS3116 -30	2.250	1.232	1.375	5.60
AS3116 -31	2.375	1.375	1.500	5.83
AS3116 -32	2.500	1.482	1.625	6.06
AS3116 -33	2.625	1.607	1.750	6.29
AS3116 -34	2.750	1.732	1.875	6.52
AS3116 -35	2.875	1.857	2.000	6.75
AS3116 -36	3.000	1.982	2.125	6.97
AS3116 -37	3.125	2.107	2.250	7.20
AS3116 -38	3.250	2.232	2.375	7.43
AS3116 -39	3.375	2.357	2.500	7.66
AS3116 -40	3.500	2.482	2.625	7.89
AS3116 -41	3.625	2.607	2.750	8.12
AS3116 -42	3.750	2.732	2.875	8.35
AS3116 -43	3.875	2.857	3.000	8.58
AS3116 -44	4.000	2.982	3.125	8.81
AS3116 -45	4.125	3.107	3.250	9.03
AS3116 -46	4.250	3.232	3.375	9.26
AS3116 -47	4.375	3.357	3.500	9.49
AS3116 -48	4.500	3.482	3.625	9.72
AS3116 -49	4.625	3.607	3.750	9.95
AS3116 -50	4.750	3.732	3.875	10.18
AS3116 -51	4.875	3.857	4.000	10.41
AS3116 -52	5.000	3.982	4.125	10.64
AS3116 -53	5.125	4.107	4.250	10.87
AS3116 -54	5.250	4.232	4.375	11.09
AS3116 -55	5.375	4.357	4.500	11.32
AS3116 -56	5.500	4.482	4.625	11.55
AS3116 -57	5.625	4.607	4.750	11.78
AS3116 -58	5.750	4.732	4.875	12.01
AS3116 -59	5.875	4.857	5.000	12.24
AS3116 -60	6.000	4.982	5.125	12.47

SAEAMS.COM: Click to visit the full PDF of AS3116a