

**REV.
A**

AS3140


NONCURRENT NOTICE

THIS DOCUMENT HAS BEEN DECLARED "NONCURRENT" AS OF MARCH 1999. IT IS RECOMMENDED, THEREFORE, THAT THIS DOCUMENT NOT BE SPECIFIED FOR NEW DESIGNS.

EACH OF THESE "NONCURRENT" DOCUMENTS IS AVAILABLE FROM SAE UPON REQUEST.

SAENORM.COM : Click to view the full PDF of as3140a

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

STUD, STEPPED - 2.5 DIA ENGAGEMENT, PD SHANK,
AMS 5731
.3125-24 UNJF-3A X .250-28 UNJF-3A

AS3140
SHEET 1 OF 3

**REV.
A**

ISSUED 1976-04 NONCURRENT 1999-03 REAFFIRMED 2004-07

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS3140

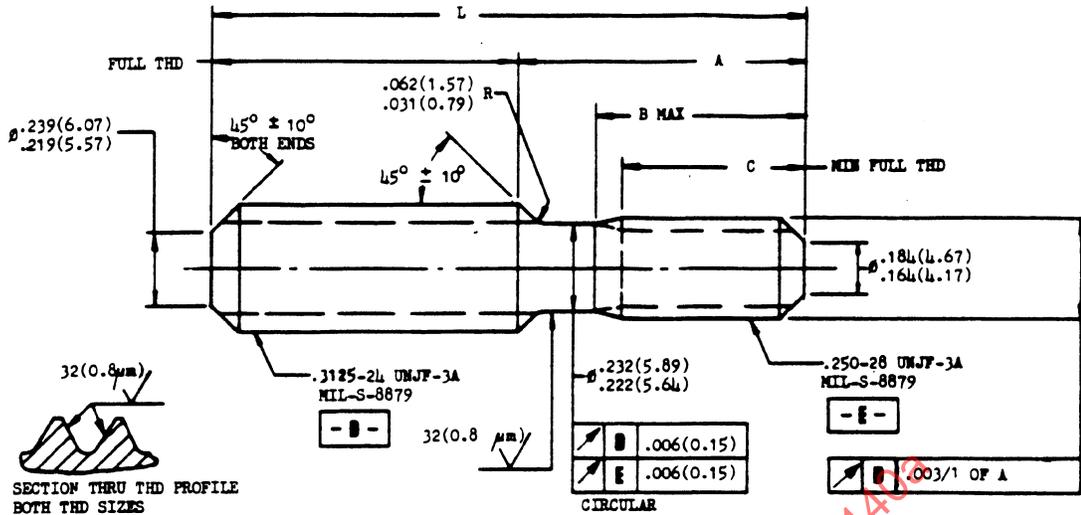


FIGURE 1

TABLE 1

PART NUMBER	L		A		B MAX		C MIN		APPROX. MASS	
	INCH	(mm)	INCH	(mm)	INCH	(mm)	INCH	(mm)	lb/100	(kg/100)
AS3140-07	1.365 - 1.385	34.68 - 35.17	.584 - .604	14.84 - 15.34	.499	12.67	.427	10.85	2.07	.94
AS3140-08	1.428 - 1.448	36.28 - 36.77	.647 - .667	16.44 - 16.94	.562	14.27	.490	12.45	2.14	.97
AS3140-09	1.490 - 1.510	37.85 - 38.35	.709 - .729	18.01 - 18.51	.624	15.84	.552	14.03	2.20	1.00
AS3140-10	1.552 - 1.572	39.43 - 39.92	.771 - .791	19.59 - 20.09	.634	16.10	.562	14.27	2.27	1.03
AS3140-11	1.615 - 1.635	41.03 - 41.52	.834 - .854	21.19 - 21.69	.634	16.10	.562	14.27	2.34	1.06
AS3140-12	1.678 - 1.698	42.63 - 43.12	.897 - .917	22.79 - 23.29	.634	16.10	.562	14.27	2.41	1.09
AS3140-13	1.740 - 1.760	44.20 - 44.70	.959 - .979	24.36 - 24.86	.634	16.10	.562	14.27	2.48	1.12
AS3140-14	1.802 - 1.822	45.78 - 46.27	1.021 - 1.041	25.94 - 26.44	.634	16.10	.562	14.27	2.55	1.16
AS3140-15	1.865 - 1.885	47.38 - 47.87	1.084 - 1.104	27.54 - 28.04	.634	16.10	.562	14.27	2.62	1.19
AS3140-16	1.928 - 1.948	48.98 - 49.47	1.147 - 1.167	29.14 - 29.64	.634	16.10	.562	14.27	2.69	1.22
AS3140-17	1.990 - 2.010	50.55 - 51.05	1.209 - 1.229	30.71 - 31.21	.634	16.10	.562	14.27	2.76	1.25
AS3140-18	2.115 - 2.135	53.73 - 54.22	1.334 - 1.354	33.89 - 34.39	.634	16.10	.562	14.27	2.90	1.29
AS3140-19	2.240 - 2.260	56.90 - 57.40	1.459 - 1.479	37.06 - 37.56	.634	16.10	.562	14.27	3.04	1.37
AS3140-20	2.365 - 2.385	60.08 - 60.57	1.584 - 1.604	40.24 - 40.74	.634	16.10	.562	14.27	3.19	1.44
AS3140-21	2.490 - 2.510	63.25 - 63.75	1.709 - 1.729	43.41 - 43.91	.634	16.10	.562	14.27	3.32	1.51
AS3140-22	2.615 - 2.635	66.43 - 66.92	1.834 - 1.854	46.59 - 47.09	.634	16.10	.562	14.27	3.46	1.57
AS3140-23	2.740 - 2.760	69.60 - 70.10	1.959 - 1.979	49.76 - 50.26	.634	16.10	.562	14.27	3.60	1.64
AS3140-24	2.865 - 2.885	72.78 - 73.27	2.084 - 2.104	52.94 - 53.44	.634	16.10	.562	14.27	3.74	1.70
AS3140-25	2.990 - 3.010	75.95 - 76.45	2.209 - 2.229	56.11 - 56.61	.634	16.10	.562	14.27	3.88	1.76
AS3140-26	3.115 - 3.135	79.13 - 79.62	2.334 - 2.354	59.29 - 59.79	.634	16.10	.562	14.27	4.02	1.82
AS3140-27	3.240 - 3.260	82.30 - 82.80	2.459 - 2.479	62.46 - 62.96	.634	16.10	.562	14.27	4.16	1.89
AS3140-28	3.365 - 3.385	85.48 - 85.97	2.584 - 2.604	65.64 - 66.14	.634	16.10	.562	14.27	4.30	1.95
AS3140-29	3.490 - 3.510	88.65 - 89.15	2.709 - 2.729	68.81 - 69.31	.634	16.10	.562	14.27	4.44	2.02
AS3140-30	3.615 - 3.635	91.83 - 92.32	2.834 - 2.854	71.99 - 72.49	.634	16.10	.562	14.27	4.58	2.08
AS3140-31	3.740 - 3.760	95.00 - 95.50	2.959 - 2.979	75.16 - 75.66	.634	16.10	.562	14.27	4.72	2.14
AS3140-32	3.865 - 3.885	98.18 - 98.67	3.084 - 3.104	78.34 - 78.84	.634	16.10	.562	14.27	4.86	2.20