

RATIONALE

FIGURE REDRAWN, USAGE NOTE ADDED, SPECS UPDATED.

REV.
B

AS3160™

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


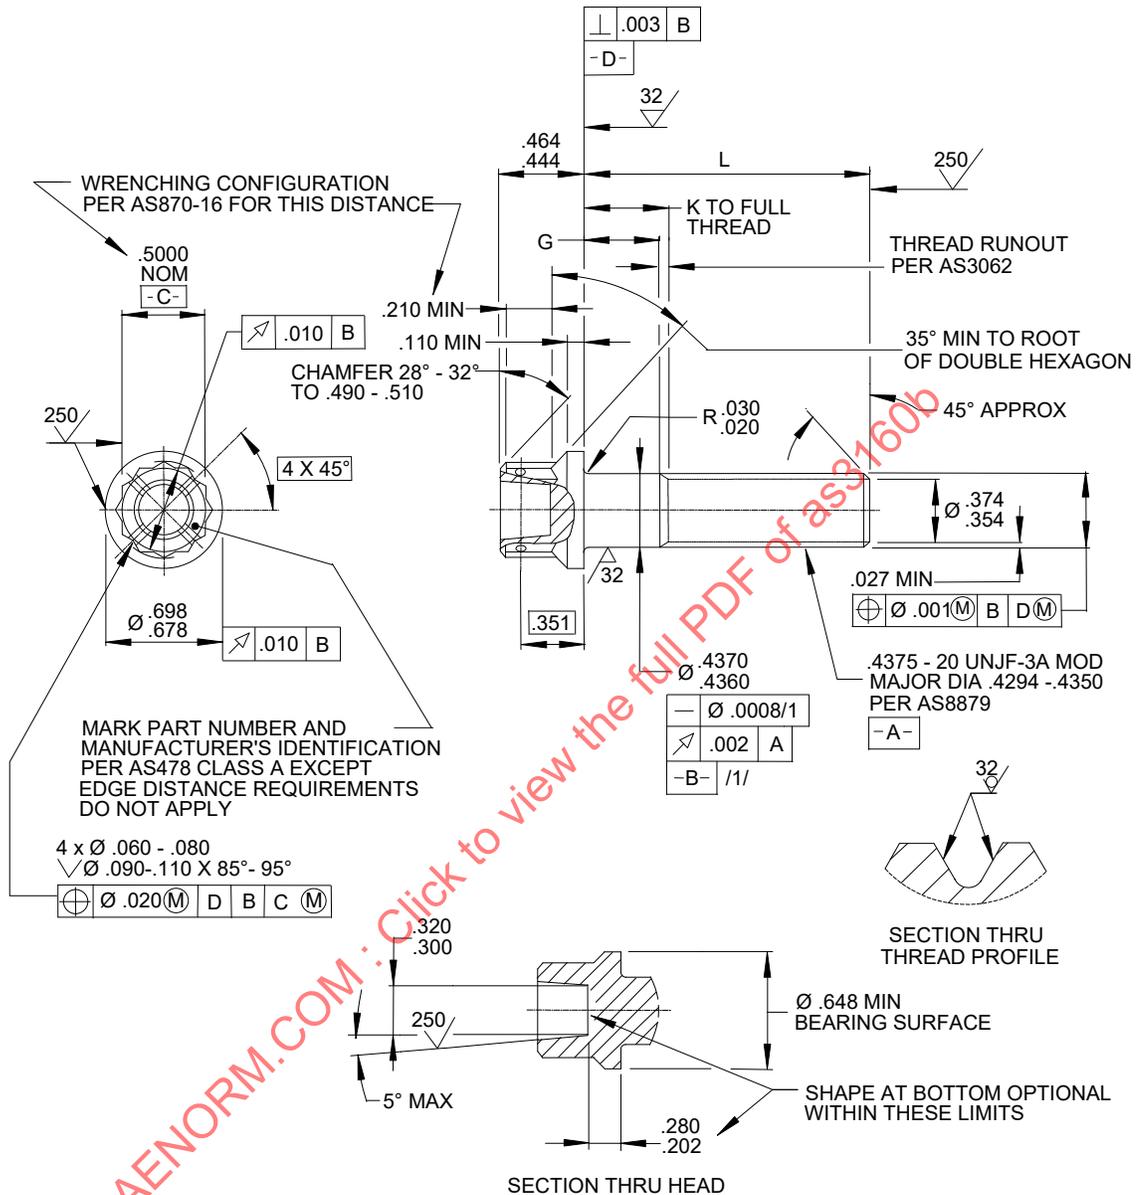


FIGURE 1

For more information on this standard, visit <https://www.sae.org/standards/content/AS3160B>

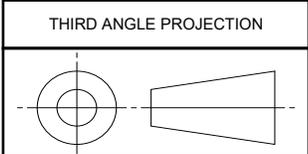

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7461



AEROSPACE STANDARD

BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, CLOSE TOLERANCE SHANK, AMS4967, .4375-20 UNJF-3A

AS3160™
SHEET 1 OF 3

REV.
B

ISSUED 1976-11 REAFFIRMED 2006-10 REVISED 2020-12

TABLE 1

PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100	PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100
AS3160-03	.885	.088	.198	3.51	AS3160-41	3.259	2.462	2.572	9.31
AS3160-04	.947	.150	.260	3.67	AS3160-42	3.322	2.525	2.635	9.46
AS3160-05	1.009	.212	.322	3.81	AS3160-43	3.385	2.588	2.698	9.62
AS3160-06	1.072	.275	.385	3.97	AS3160-44	3.447	2.650	2.760	9.77
AS3160-07	1.135	.338	.448	4.13	AS3160-45	3.509	2.712	2.822	9.91
AS3160-08	1.197	.400	.510	4.28	AS3160-46	3.572	2.775	2.885	10.07
AS3160-09	1.259	.462	.572	4.43	AS3160-47	3.635	2.838	2.948	10.23
AS3160-10	1.322	.525	.635	4.58	AS3160-48	3.697	2.900	3.010	10.37
AS3160-11	1.385	.588	.698	4.74	AS3160-49	3.759	2.962	3.072	10.53
AS3160-12	1.447	.650	.760	4.88	AS3160-50	3.822	3.025	3.135	10.69
AS3160-13	1.509	.712	.822	5.04	AS3160-51	3.885	3.088	3.198	10.84
AS3160-14	1.572	.775	.885	5.19	AS3160-52	3.947	3.150	3.260	10.98
AS3160-15	1.635	.838	.948	5.35	AS3160-53	4.009	3.212	3.322	11.14
AS3160-16	1.697	.900	1.010	5.50	AS3160-54	4.072	3.275	3.385	11.30
AS3160-17	1.759	.962	1.072	5.65	AS3160-55	4.135	3.338	3.448	11.44
AS3160-18	1.822	1.025	1.135	5.81	AS3160-56	4.197	3.400	3.510	11.60
AS3160-19	1.885	1.088	1.198	5.95	AS3160-57	4.259	3.462	3.572	11.75
AS3160-20	1.947	1.150	1.260	6.10	AS3160-58	4.322	3.525	3.635	11.91
AS3160-21	2.009	1.212	1.322	6.26	AS3160-59	4.385	3.588	3.698	12.05
AS3160-22	2.072	1.275	1.385	6.41	AS3160-60	4.447	3.650	3.760	12.21
AS3160-23	2.135	1.338	1.448	6.57	AS3160-61	4.509	3.712	3.822	12.35
AS3160-24	2.197	1.400	1.510	6.72	AS3160-62	4.572	3.775	3.885	12.51
AS3160-25	2.259	1.462	1.572	6.88	AS3160-63	4.635	3.838	3.948	12.67
AS3160-26	2.322	1.525	1.635	7.02	AS3160-64	4.697	3.900	4.010	12.82
AS3160-27	2.385	1.588	1.698	7.17	AS3160-65	4.759	3.962	4.072	12.97
AS3160-28	2.247	1.650	1.760	7.33	AS3160-66	4.822	4.025	4.135	13.12
AS3160-29	2.509	1.712	1.822	7.48	AS3160-67	4.885	4.088	4.198	13.28
AS3160-30	2.572	1.775	1.885	7.63	AS3160-68	4.947	4.150	4.260	13.42
AS3160-31	2.635	1.838	1.948	7.79	AS3160-69	5.009	4.212	4.322	13.58
AS3160-32	2.697	1.900	2.010	7.94	AS3160-70	5.072	4.275	4.385	13.73
AS3160-33	2.759	1.962	2.072	8.09	AS3160-71	5.135	4.338	4.448	13.89
AS3160-34	2.822	2.025	2.135	8.24	AS3160-72	5.197	4.400	4.510	14.04
AS3160-35	2.885	2.088	2.198	8.39	AS3160-73	5.259	4.462	4.572	14.19
AS3160-36	2.947	2.150	2.260	8.55	AS3160-74	5.322	4.525	4.635	14.35
AS3160-37	3.009	2.212	2.322	8.70	AS3160-75	5.385	4.588	4.698	14.49
AS3160-38	3.072	2.275	2.385	8.86	AS3160-76	5.447	4.650	4.760	14.65
AS3160-39	3.135	2.338	2.448	9.00	AS3160-77	5.509	4.712	4.822	14.80
AS3160-40	3.197	2.400	2.510	9.16	AS3160-78	5.572	4.775	4.885	14.95

SAENOWM.COM. Click to view the full PDF of AS3160